

The new standard in HDMI matrix technology

The Just Add Power 2G Receiver is the display-side decoding device in the HD over IP matrix system.

- **Connects to display via HDMI**
- **Connects to network via Ethernet**
- **Instant-seamless Switching**
- **Video Wall**
- **Image Pull**
- **2-way RS232 control**



Not your ordinary matrix! Don't settle for simple matrix control when you can have all of these features built-in. 2G Receivers are fully compatible with all 2G+ and 2G+AVP models.




Features
Stereo or multi-channel audio
Instant-seamless Switching
Video Wall
Image Pull
2-way RS232 control
Image Push
On-Screen Display


Compliance	HDCP & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1080p50/60 Hz PC: 1920 x 1200
Dimensions & Weight	148 x 30 x 127 mm 5.8" x 1.2" x 5.0" 0.4 kg / 0.8 lb
Ports	HDMI Out Ethernet connector RS232 (Male DB9)
Bandwidth	Up to 150 Mbps
Power Supply (included)	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
PoE	N/A



All measurements in millimeters (mm)

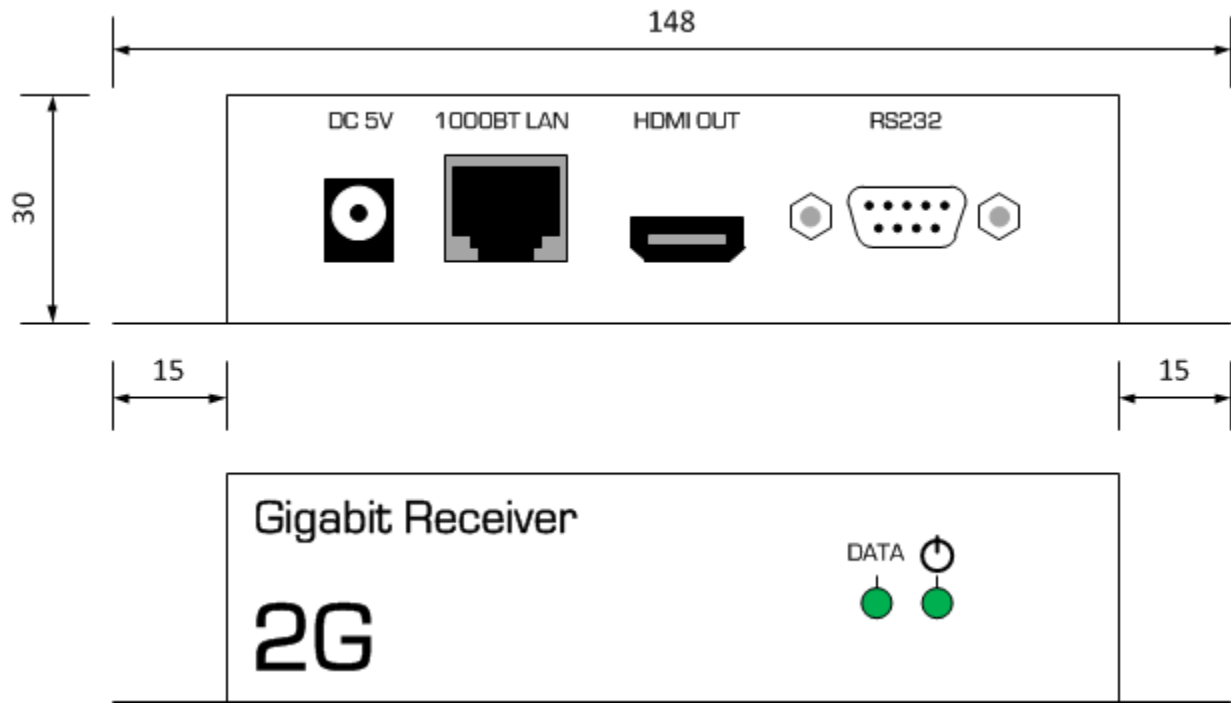

208A Front/Back

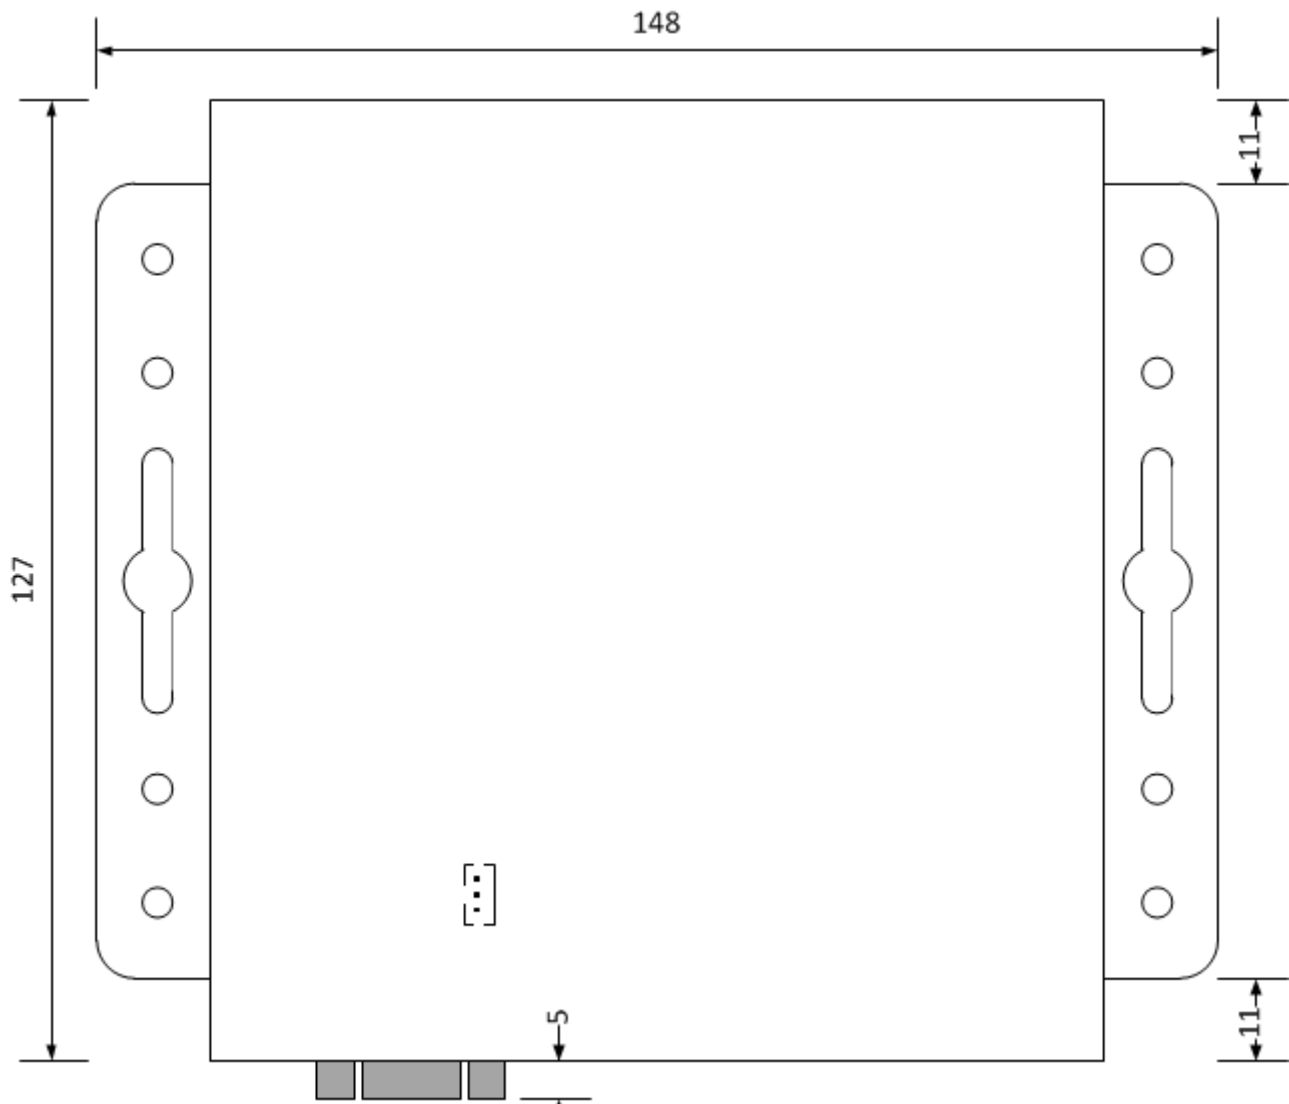

208A Bottom