


REVISIONS	
ISSUE	CHANGES

S-D

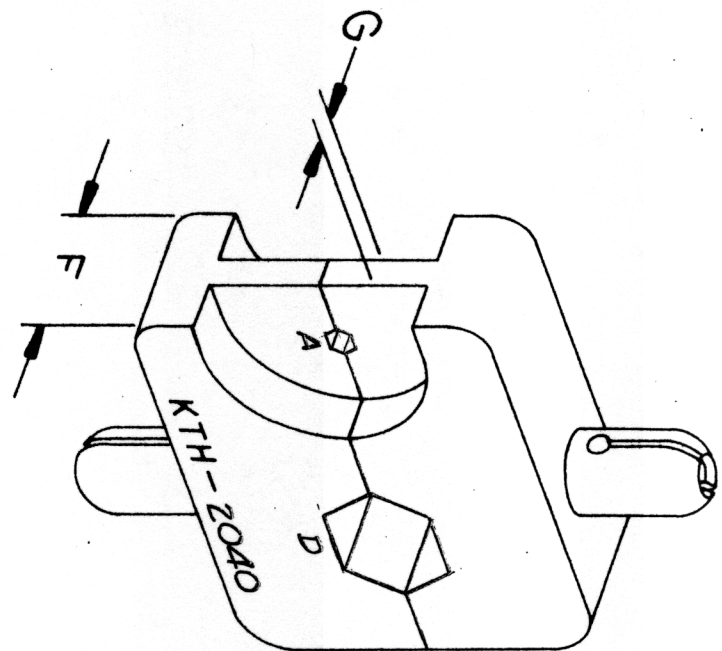

NOTES:

1. FOR USE WITH BELDEN 8233 CABLE,

HEX SIZES (ACROSS FLATS)				DIE WIDTH		DIE WIDTH	
A	B	C	D	F	G	H	I
.074	—	—	.384	—	.400	.093	—

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. PLACE DECIMALS $\pm .004$
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.
7. I, R. CONCENTRICITY OF ANY 2 DIAMETERS MAY
8. ANGLES $\pm 0^{\circ}30'$
9. NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

S-D

CRIMP DIE

DRAWN	CHK	DATE	22 JUL 87
APPR.		DATE	

SKINGS
ELECTRONICS CO. INC.
TUCUMCUM, NEW YORK 10901

KTH-2040