


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

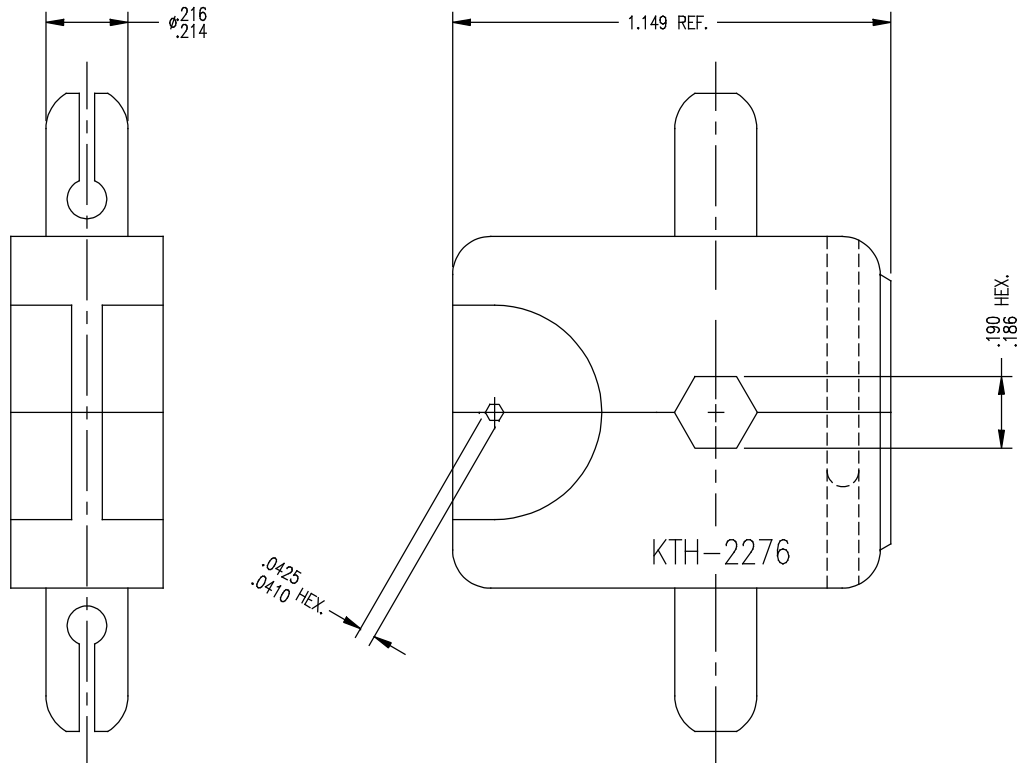

NOTES:

- FOR USE WITH BELDEN 1279P & 1279R CABLES.
- FINISH: BLACK OXIDE, PER MIL-F-495

UNLESS OTHERWISE SPECIFIED:

- TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 1^\circ$
CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT
EXCEED HALF THE SUM OF THEIR TOLERANCES.

- REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
- NO FILLETS PERMITTED.
- SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
- ALL DIMENSIONS PRIOR TO PLATING.
- ALL PLATING IN ACCORDANCE WITH KER 10004.

- ALL LEAD THREADS TO BE
CHAMFERED 45° TO ROOT DIAMETER.
★ CRITICAL DIMENSIONS

GSD



KTH-2276

REVISIONS

ISSUE	CHANGES
0	ER 39173 DCT 9/28/4

SCALE 3:1

APPROX SURFACE AREA

USED ON

REF: 2065-25-9

DIE, CRIMP

DRAWN	DCT	DATE	8/20/3
DESIGN	DCT	DATE	8/20/3
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KTH-2276

GSD