




RC-5B2

Wall Plate Insert - 2-Button Auxiliary Control Panel

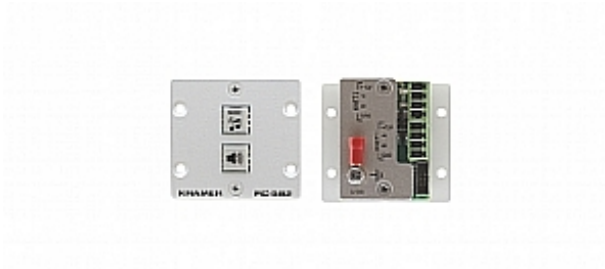

The **RC-5B2** is an 2-button auxiliary control panel with backlit RGB buttons. It can be used as an auxiliary controller when connected via K-NET™ to a master room controller (such as the RC-74DL).

FEATURES

- **2-Button Faceplate** - With backlit, configurable color buttons.
- **K-NET™ Control Channel** - For connecting individual and daisy-chaining multiple panels.
- **K-Config Installation and Configuration.**
- **USB Port** - For upgrading the firmware and setting the K-Net ID number.
- **Dimensions** - 5cm x 2.4cm x 4.7cm (1.97" x 0.94" 1.85") W, D, H.
- **Compatibility** - Can be used in any compatible opening: wall boxes, TBUS, etc.
- **Color** - Supplied with black and white front plates.



RC-5B2

TECHNICAL SPECIFICATIONS

| | |
|------------------------|--|
| PORTS: | 2 K-NET on terminal block connectors, 1 USB for programming. |
| CONTROLS: | 2 buttons. |
| POWER CONSUMPTION: | 5V DC, 40mA. |
| OPERATING TEMPERATURE: | 0° to +40°C (32° to 104°F). |
| STORAGE TEMPERATURE: | -40° to +70°C (-40° to 158°F). |
| HUMIDITY: | 10% to 90%, RHL non-condensing. |
| DIMENSIONS: | 5cm x 2.4cm x 4.7cm (1.97" x 0.94" 1.85") W, D, H. |
| WEIGHT: | 0.14kg (0.31lbs) approx. |
| INCLUDED ACCESSORIES: | Black and white front plates. |

CONFIGURATIONS
