


### Analog Sync / Video Fiber Optic Transmitter

- Supports analog black burst, bi-level, tri-level sync signals and NTSC and PAL composite video
- Passive loop output
- Broadcast quality performance
- Error free optical transmission
- Versions for LC, ST or SC fiber connections
- Multimode version available
- Up to 10km (6.2 miles) singlemode
- Up to 300m (984 feet) multimode
- Supports hot swapping and hot plugging
- yelloGUI compatible to access additional internal settings

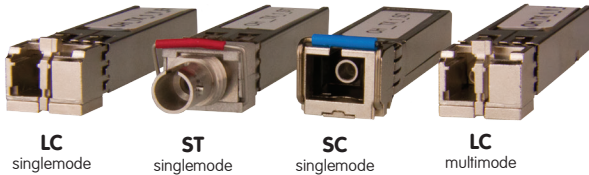

Using the same basic module we provide four versions suitable for LC, ST or SC singlemode fiber connections, as well as a version for multimode fiber. Each version has a different SFP installed.

The OTX 1712 is a compact analog sync or NTSC/PAL composite video to fiber optic transmitter. This device is specifically designed to combat the restrictions involved with the distribution of broadcast quality analog reference and composite video signals over long distances.

When paired with the fiber optic receiver ORX 1702 you have a very cost effective optical transmission system for analog sync reference signals or NTSC/PAL composite video. This device is particularly useful for reference sync distribution between remote installations to maintain correct synchronization.

Unlike other very basic analog to fiber conversion solutions, the OTX 1712 incorporates technology to maintain a very high degree of sync and burst phase stability during the conversion and fiber transmission.

The module converts the NTSC/PAL video signal to an SDI signal (including reference and other relevant information) before it is converted to fiber. Therefore when the OTX 1712 is used for NTSC or PAL video sources it is possible to convert the fiber signal directly to SDI if required using an SDI receiver (e.g. ORX 1802).

The OTX 1712 provides a passive loop output and support for LC, ST or SC singlemode fiber connections. An LC version suitable for multimode fiber is also available.



OTX 1712 LC Version Shown

### Technical Specifications

<b>Analog Input</b>	Sync = analog black burst / SDTV bi-level / HDTV tri-level Video = NTSC / PAL composite video 1 x passive loop output (terminate if not used) 75 Ohm BNC connectors
	NTSC SMPTE 170M, PAL CCR624 Analog tri-level sync SMPTE ST 274, ST 276
	Multi-standard operation, auto-detect
	Return loss: 31dB to 10MHz
<b>Fiber Out Singlemode</b>	1 x fiber optic singlemode output LC, ST or SC connection
	SMPTE 297M - 2006
	Wavelength: 1310nm, Optical power -5dBm
	TX active LED on side of module
	Max. distance: 10km (6.2 miles - approx)
<b>Fiber Out Multimode</b>	1 x fiber optic multimode output LC connection
	SMPTE 297M - 2006
	Wavelength: 850nm, Optical power -5dBm
	TX active LED on side of module
	Max. distance: 300m (984feet - approx)
<b>Power</b>	+12VDC @ 3.4W nominal - ( supports 8 - 24VDC input range )
<b>Physical</b>	Size: 140mm x 42mm x 22mm ( 5.51" x 1.65" x 0.86" ) including connectors Weight: 125g (4.4oz)
<b>Ambient</b>	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
<b>Model #</b>	OTX 1712 LC - ( EAN# 4250479320345 ) OTX 1712 ST - ( EAN# 4250479320352 ) OTX 1712 SC - ( EAN# 4250479320369 ) OTX 1712 MM (multimode) - ( EAN# 4250479320376 )
<b>Includes</b>	Module, 12V DC power supply and plastic transport case

### Power Adapter Options

The kit **INCLUDES** AC power supply. The power adapters below are optional.



**P-TAP 1000**  
Use with a standard battery P-TAP power source.



**XLR 1000**  
Use with a standard 4 pin XLR camera battery power source.

Specifications subject to change