



MXL 604

Small Diaphragm Condenser Microphone

Marshall Electronics, Inc.
1910 East Maple Ave. El Segundo, CA 90245
Phone: (310) 333-0606 Fax: (310) 333-0688
E-mail: Sales@mxlmics.com
Internet: www.MXLmics.com

Thank you for purchasing the MXL 604 Instrument Condenser microphone. With proper care, this mic will provide many years of satisfaction. For best results, please take a few moments to review this literature.

General Characteristics

This microphone has a twenty millimetre gold-sputtered diaphragm with a fixed cardioid pickup and an interchangeable omni-directional capsule. Condenser microphones tend to be very sensitive, readily revealing very subtle sonic details. They also tend to pick up ambient sounds more than dynamic microphones, which can lead to powerful feedback if you are not careful. We strongly advise experimentation with placement and isolation requirements with the gain initially set low to avoid equipment and hearing damage!

Power Requirements

IMPORTANT - This unit requires phantom power at 48 volts, +/- 4 volts. Each unit has been thoroughly checked before shipping, so if you do not hear sound, check that the phantom power on your mixer or separate power supply is switched on!

Microphone Cables



The microphone cable can have a profound effect on the sound of any microphone. Even the finest microphones will sound poor if the interconnect cable allows noise to enter, or causes distortion and loss of information. Use only the best microphone cable your budget will allow. We recommend using Mogami® brand cable.

Care

Dust and foreign material can degrade the performance of a microphone over time so always store the unit in its case. Remove fingerprints from the exterior with a clean soft cloth.

Technical Data

Type:	Pressure gradient 22mm capsule
Diaphragm:	6 micron gold-sputtered
Frequency Range:	30 Hz - 20 kHz
Polar Pattern:	Cardioid/Omnidirectional
Sensitivity:	15 mv/Pa
Impedance:	150 ohms
Pre-Attenuation Switch:	0 dB, -10 dB
High Pass Filter:	6 dB/octave @ 150 Hz
Equivalent Noise:	17 dB (A weighted IEC 268-4)
S/N Ratio:	77 dB (Ref. 1 Pa A weighted)
Max SPL for 0.5% THD:	137 dB
Power Requirements:	48V phantom power (+/- 4V)
Size:	86 in x 5.2 in/22mm x 133mm
Weight:	0.3 lbs/136g
Metal Finish:	Nickel plated

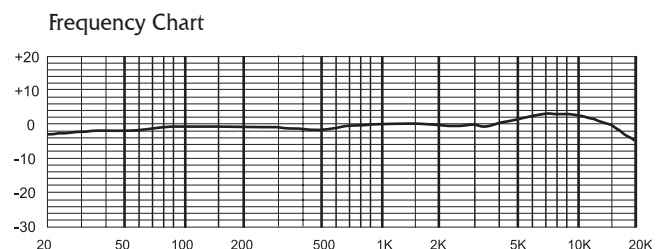

Warranty

Marshall microphones are guaranteed against defects in material and workmanship for **Three** years from date of purchase. Should you encounter any problem with this unit, promptly contact the company you purchased it from for assistance. The original dated sales receipt will be necessary for any warranty claim. Do not send any unit directly to us without prior authorization from our service department! Warranty coverage is limited to repair or replacement (at our option) of the microphone, and does not cover incidental damages due to use of this unit, nor damage caused by accidental misuse of this product.