



Overview

The HDMI to VGA Converter (500466) converts a single HDMI channel to analog VGA/RGB. The converter allows HDMI sources to be used with legacy VGA/RGB equipment thereby helping to maximize investment in existing VGA hardware.

Applications

Commercial and residential AV systems, laptop to projector, boardroom systems, retrofit installations, medical information systems.




Key Features

Converts HDMI to VGA
Supports up to 1080p/1920x1200 Deep Color
Use HDMI sources with legacy VGA displays
Supports DVI when used with a DVI to HDMI cable
No external power required

Specifications	
Environment	HDMI 1.3, VESA VGA
Devices	DVD, HDTV, projectors, monitors, TV, PC, laptops and other equipt supporting HDMI and/or VGA
HDCP	Compliant
Maximum resolution	1080p, 1920x1200
Transmission	Transparent to the user
Standard	HDMI 1.3
Connectors	One (1) HDMI Type A cable lead One (1) HD15F for VGA
Power	No external power required
Temperature	Operating: 0° to 40° C. Storage:-20° to 85° C. Humidity: up to 95% non-condensing.
Enclosure	Plastic
Dimensions	1.77" x 7.48" x 0.59" (45 x 190 x 15 mm)
Weight	3.2 oz (91 grams)
Compliance	FCC Class A, CE, RoHS
Warranty	Lifetime
Order Information	500466 HDMI to VGA Converter

Typical Application

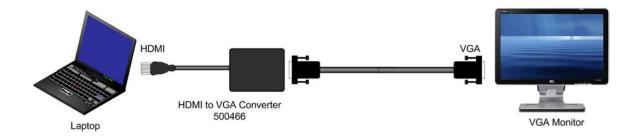

© MuxLab Inc. 2014 draft

HDMI to VGA Converter

MuxLab Inc.

8495 Dalton Road, Mount Royal, Quebec, Canada, H4T 1V5 Tel: (514) 905 0588 Fax: (514) 905 0589

Toll Free:1 877 689-5228 E-mail: videoease@muxlab.com

URL:www.muxlab.com