


Active Distribution Components

TRU SPEC
A PICO MACOM REGISTERED TRADEMARK




VSS-52R 5x2 Matrix Switch

- Built-in microprocessor control provides touch control instant switching of five inputs and two independent outputs
- Convenient remote control enables on-the-fly selection from up to 25 feet
- Multiple video input types provide maximum interface compatibility
- Internal amplifier ensures maintenance of high quality picture
- Quick switch status provided by front panel LED (source, output, standby)
- S-Video, composite video and L/R audio patch cable provided

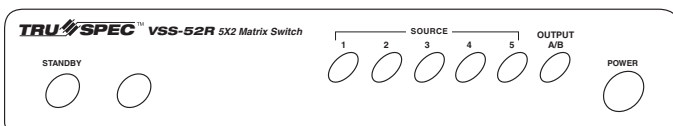

Front View

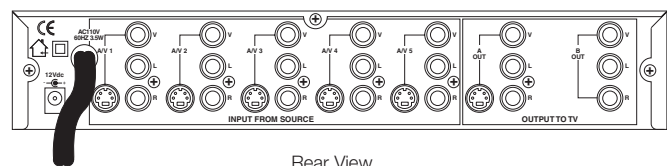

Rear View

Specifications

Frequency Range	20Hz~10MHz
Input Video	5 x S-video, RCA-Comp.
Input Audio	5 x RCA-Audio (L and R)
Output Video	2 x S-video, RCA-Comp.
Output Audio	2 x RCA-Audio (L and R)
Video Impedance	75Ω
Audio Impedance	47Ω
Power Input	120VAC
Power Frequency	60Hz
Power Required	250mA
Dimensions	11.4" (L) x 7.3" (D) x 2.1" (H)
Weight	1.2 kg

Ordering Information

VSS-52R 5x2 Matrix Switch

Specifications Subject to Change Without Notice © Copyright 2011 Pico Digital, Inc. Rev. 02/11

CONTACT US 858.546.5050

PICO MACOM

www.picomacom.com