




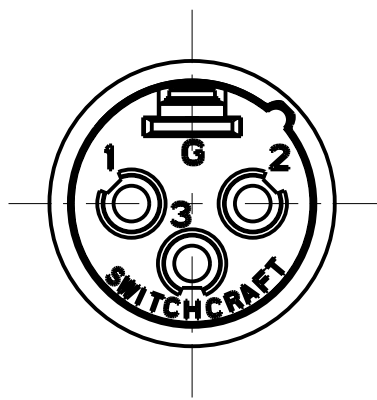


3 PIN

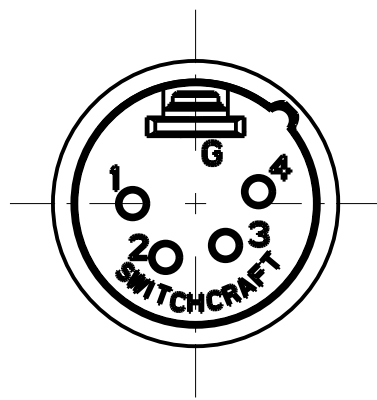


4 PIN

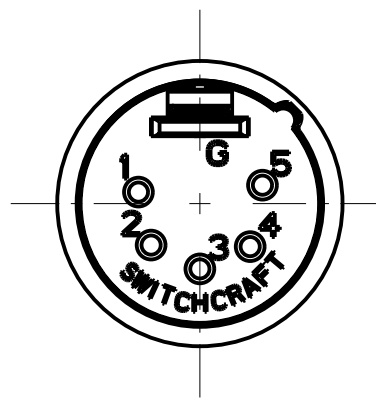

5 PIN

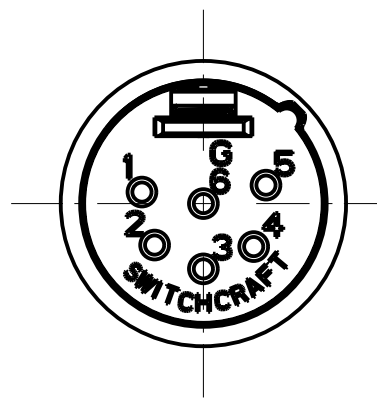

6 PIN

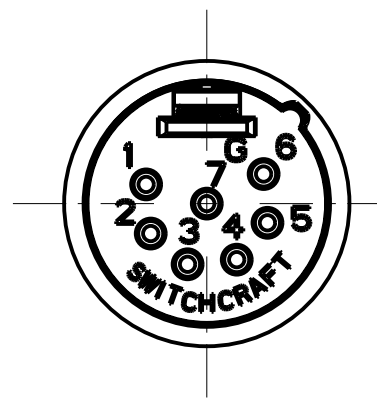

7 PIN

STANDARD SERIES

M

INSERT SCREW - STAINLESS STEEL
FLEX RELIEF SCREW - STEEL
HOUSING - ZINC, NICKEL PLATED
TUBULAR INSULATOR - MYLAR
SOLDER TERMINAL - BRASS, ELECTRO TIN
FLEX RELIEF - HI-FAX
CLAMP PLATE - STAINLESS STEEL
INSULATOR - POLYESTER, GREEN (UL94V-0)
PINS - BRASS, SILVER PLATED

A

M

FLEX RELIEF COLOR
BLANK = BLACK
01 = BROWN
02 = RED
03 = ORANGE
04 = YELLOW
05 = GREEN
06 = BLUE
07 = VIOLET
08 = GRAY
09 = WHITE

PIN PLATING
BLANK = SILVER (STANDARD)
AU = GOLD

HOUSING FINISH
BLANK = NICKEL PLATED (STANDARD)
B = BLACK

FLEX RELIEF SIZE
BLANK = STANDARD SIZE (0.210 TO 0.300)
L = LARGE CABLES (0.300 TO .0328)
S = SMALL CABLES (0.105 TO 0.205)

NO. OF PINS:
3 = 3 PINS
4 = 4 PINS
5 = 5 PINS
6 = 6 PINS
7 = 7 PINS





PROFESSIONAL SERIES

M

SAME AS ABOVE EXCEPT
HOUSING - NON-REFLECTIVE VELTONE FINISH
FLEX RELIEF - GRAY
PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL

OGP - 23

NO. OF PINS:
3 = 3 PINS
4 = 4 PINS
5 = 5 PINS
6 = 6 PINS
7 = 7 PINS

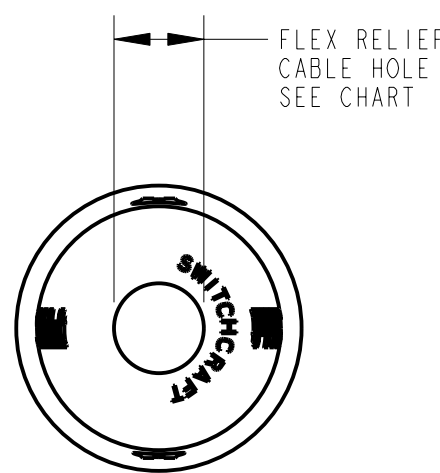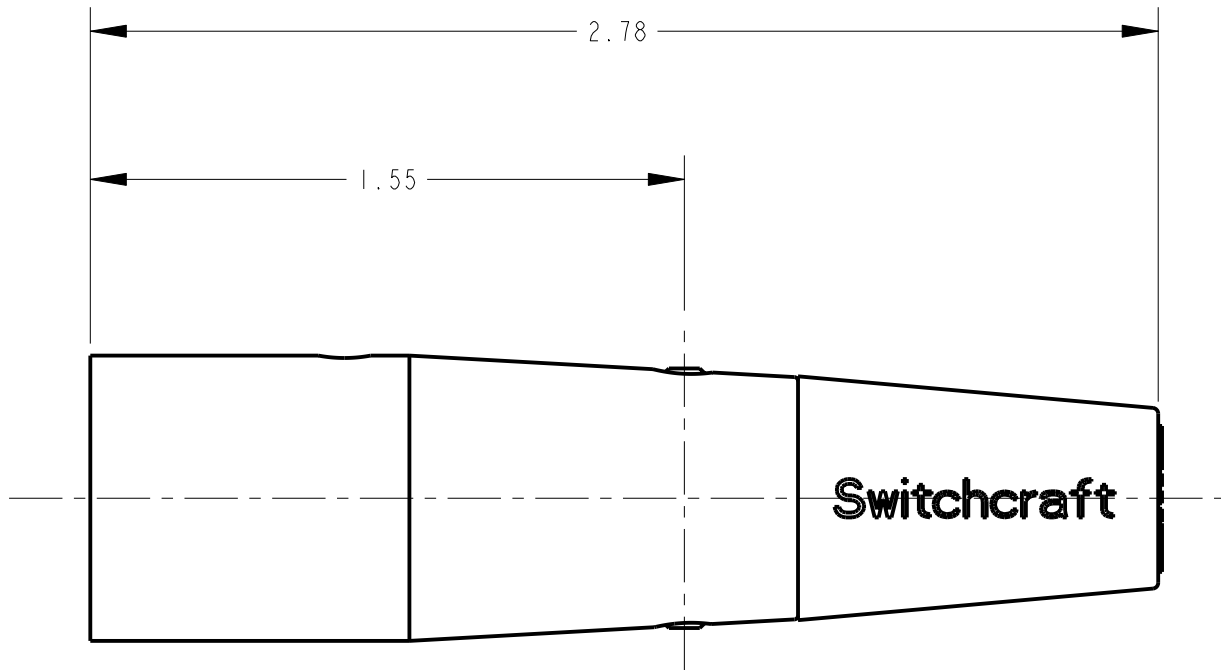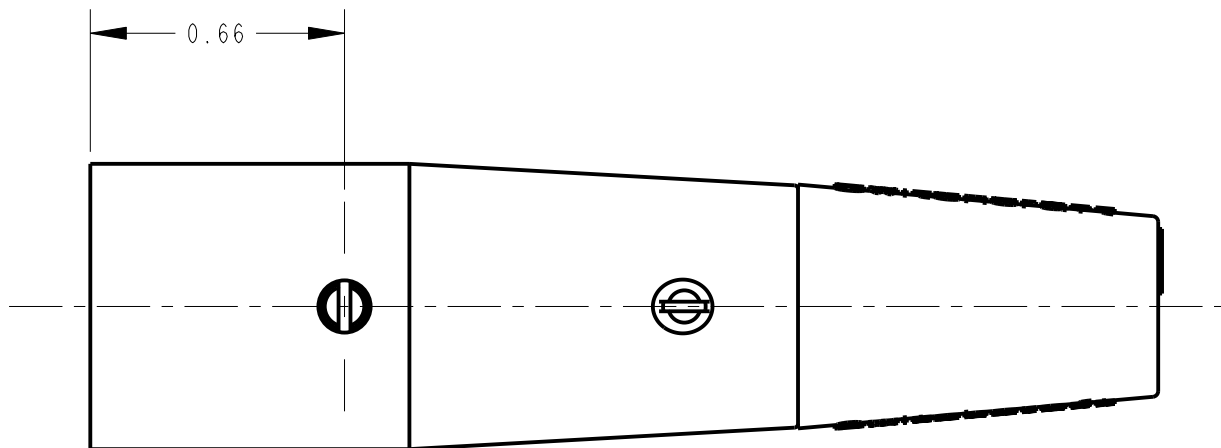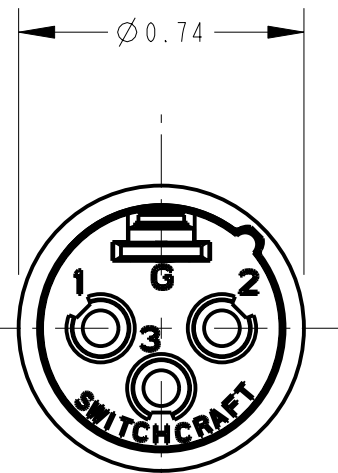

NOTE:

1. ALL DIMENSIONS REFERENCE UNLESS OTHERWISE SPECIFIED.

CUSTOMER DRAWING

★ STAR SYMBOL DENOTES CRITICAL DIMENSION					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
UNLESS OTHERWISE SPECIFIED					SIZE	WIDTH	MULT	LBS/M	TEMPER
1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.					FINISH SPEC No.		MATERIAL SPEC No.		
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002					FIRST USED ON		SCALE 2:1		
3. REMOVE ALL BURRS					DATE DRAWN	BY	CHKD	APVD	Switchcraft®
DO NOT SCALE DRAWING					6-18-94	SG	AA 7-22-94	GHJ 8-1-94	
REVISIONS					NAME A SERIES MALE OG				PART No. A_M_SERIES
									REV M