




8 7 6 5 4 3 2 1




3 PIN

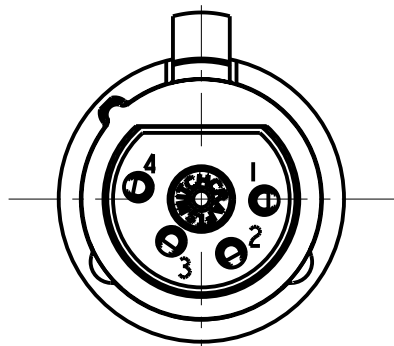


4 PIN

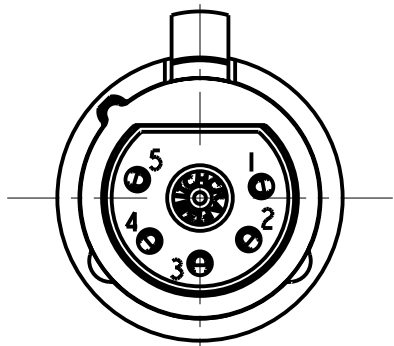

5 PIN

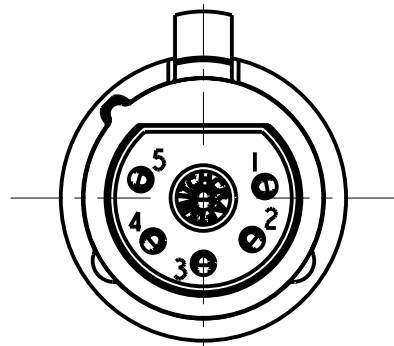

6 PIN

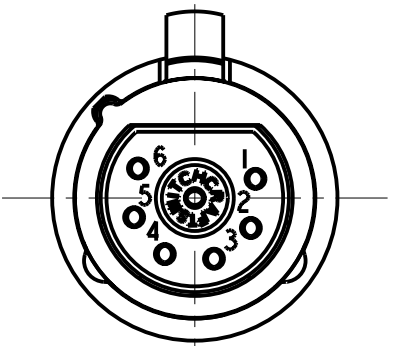

7 PIN

STANDARD SERIES

INSERT SCREW - STAINLESS STEEL
FLEX SCREW - STEEL, NICKEL PLATED
HOUSING - ZINC, NICKEL PLATED
SHELL - STAINLESS STEEL
LATCH BUTTON - ZINC, NICKEL PLATED
LATCH SPRING - STAINLESS STEEL
CONTACTOR - BERYLLIUM COPPER, NICKEL PLATE
TUBULAR INSULATOR - MYLAR
SOLDER TERMINAL - BRASS, ELECTRO TIN
FLEX RELIEF - HI-FAX, BLACK - STANDARD (X)
CLAMP PLATE - STAINLESS STEEL
INSULATORS - POLYESTER, GREEN
CONTACTS - BRASS, SILVER PLATED

- A F
- COLOR OF FLEX RELIEF
01 = BROWN
02 = RED
03 = ORANGE
04 = YELLOW
05 = GREEN
06 = BLUE
07 = VIOLET
08 = GRAY
09 = WHITE
11 = TAN
12 = PINK
13 = DARK BLUE
- CONTACT PLATING
BLANK = SILVER (STANDARD)
AU = GOLD
- HOUSING FINISH (SEE NOTE 2)
BLANK = NICKEL PLATE (STANDARD)
BX = BLACK, RoHS
- LATCH TYPE
BLANK = STANDARD LATCHLOCK
D = FAS-DIS-CONNECT DETENT (SEE FIGURE 3)
- FLEX RELIEF SIZE
BLANK = STANDARD SIZE (0.210 TO 0.300)
L = LARGE CABLES (0.300 TO .0328)
S = SMALL CABLES (0.105 TO 0.205)
- NO. OF CONTACTS:
3 = 3 CONTACTS
4 = 4 CONTACTS
5 = 5 CONTACTS
6 = 6 CONTACTS
7 = 7 CONTACTS

PROFESSIONAL SERIES

(X) SAME AS ABOVE EXCEPT
CONTACT PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL
HOUSING - NON REFLECTIVE VEL-TONE FINISH
FLEX RELIEF - GRAY

OGP 22

(X) NO. OF CONTACTS:
3 = 3 CONTACTS

NOTE:

1. ALL DIMENSIONS REF. UNLESS OTHERWISE SPECIFIED.
- (X) 2. BLACK HOUSING AND INSERT WITH SATIN NICKEL PLATED LATCH.
- (X) 3. THIS PRODUCT IS RoHS COMPLIANT.



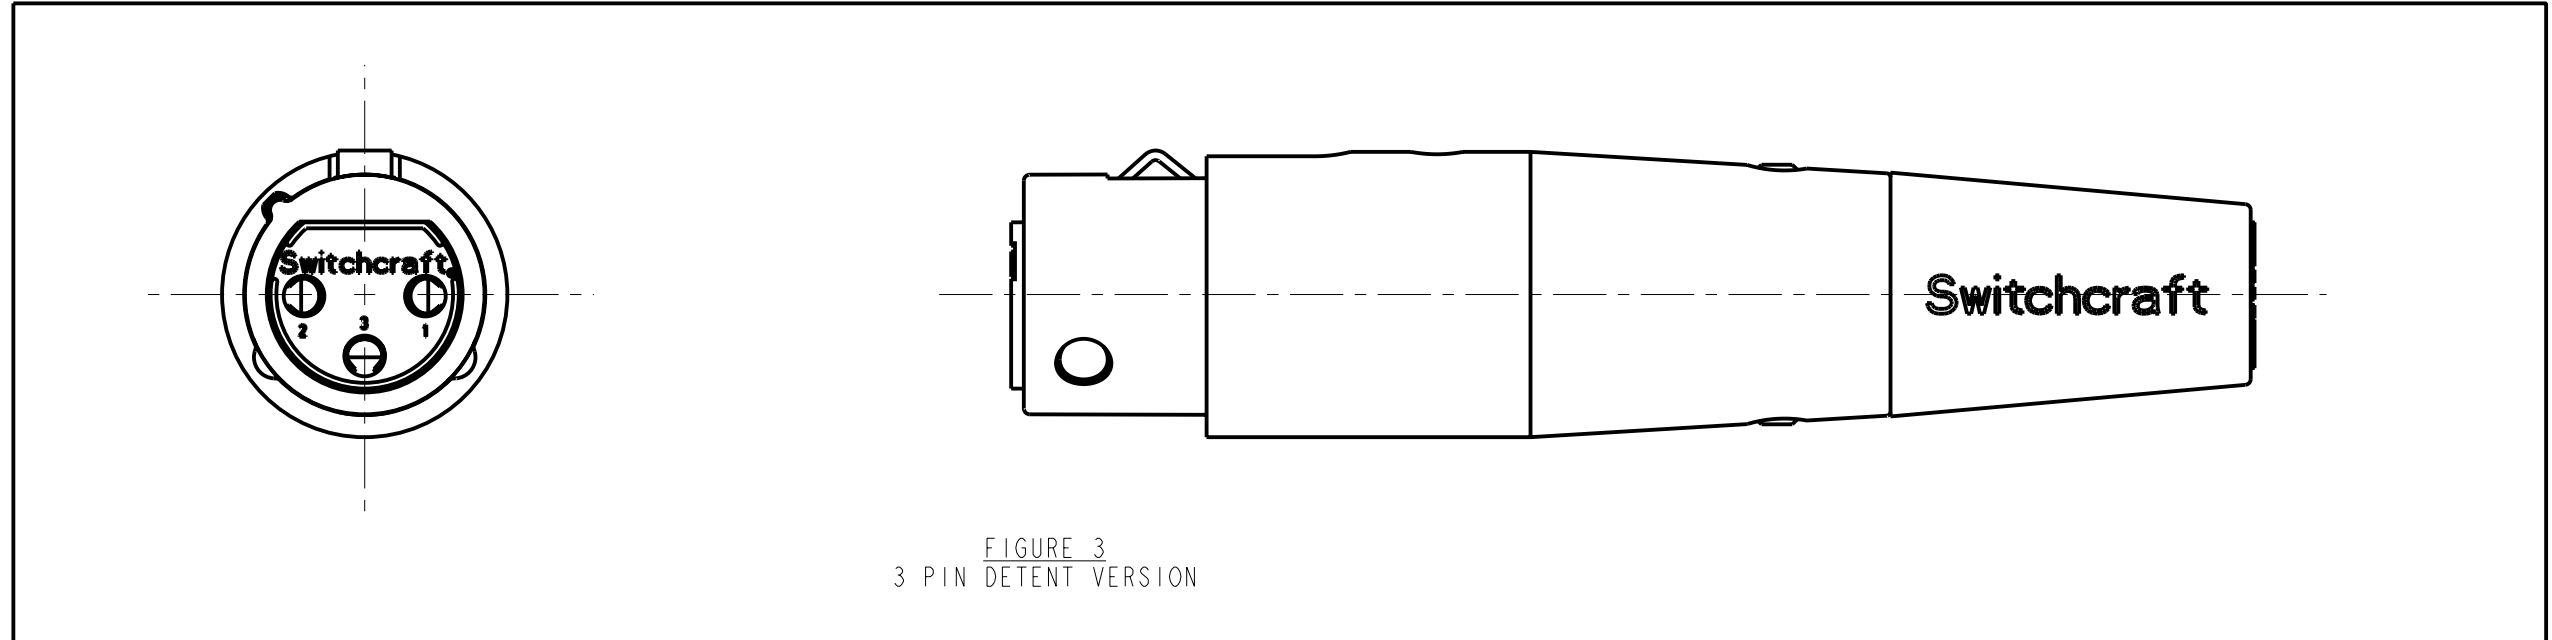


FIGURE 3
3 PIN DETENT VERSION

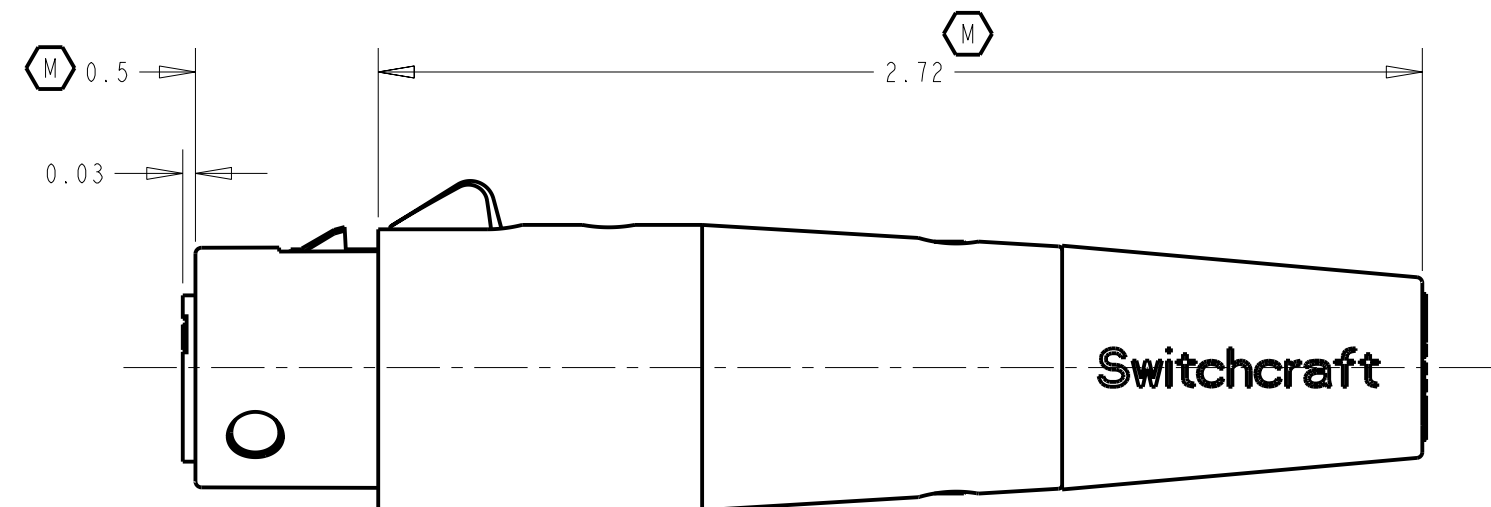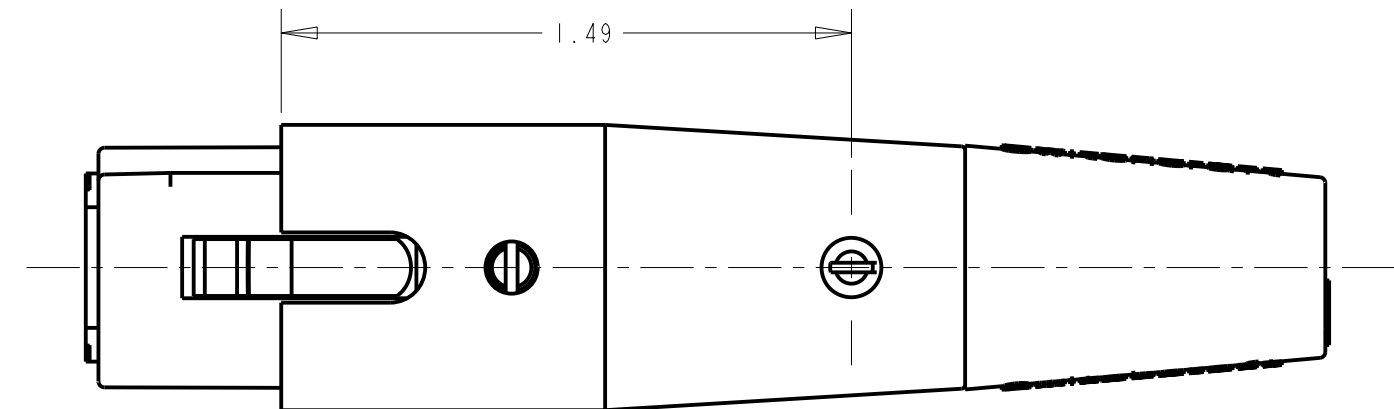

CUSTOMER DRAWING

						★ STAR SYMBOL DENOTES CRITICAL DIMENSION	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
						UNLESS OTHERWISE SPECIFIED	SIZE	WIDTH	MULT	LBS/M	TEMPER		
						1. ALL DIMENSIONS IN INCHES -TWO PLACE DECIMALS ±0.01 -THREE PLACE DECIMALS ±0.005 -ANGLES ±1° -ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.	FINISH SPEC No.			MATERIAL SPEC No.			
X	26158	10-17-07	TJK	TJK		2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002	FIRST USED ON		SCALE 2:1		Switchcraft®		
W	ECO #22530	12-21-98	MM	EB		3. REMOVE ALL BURRS	DATE DRAWN 10-26-93	BY SG	CHKD SG 1-19-95	APVD GHJ 1-19-95		SHEET OF	
V	22353	6-12-98	DA	EB			NAME			PART No.		REV	
REV	ECO NUMBER	DATE	BY	APVD		DO NOT SCALE DRAWING	"A" SERIES FEMALE OG, RoHS			A_F_SERIES		X	
REVISIONS													