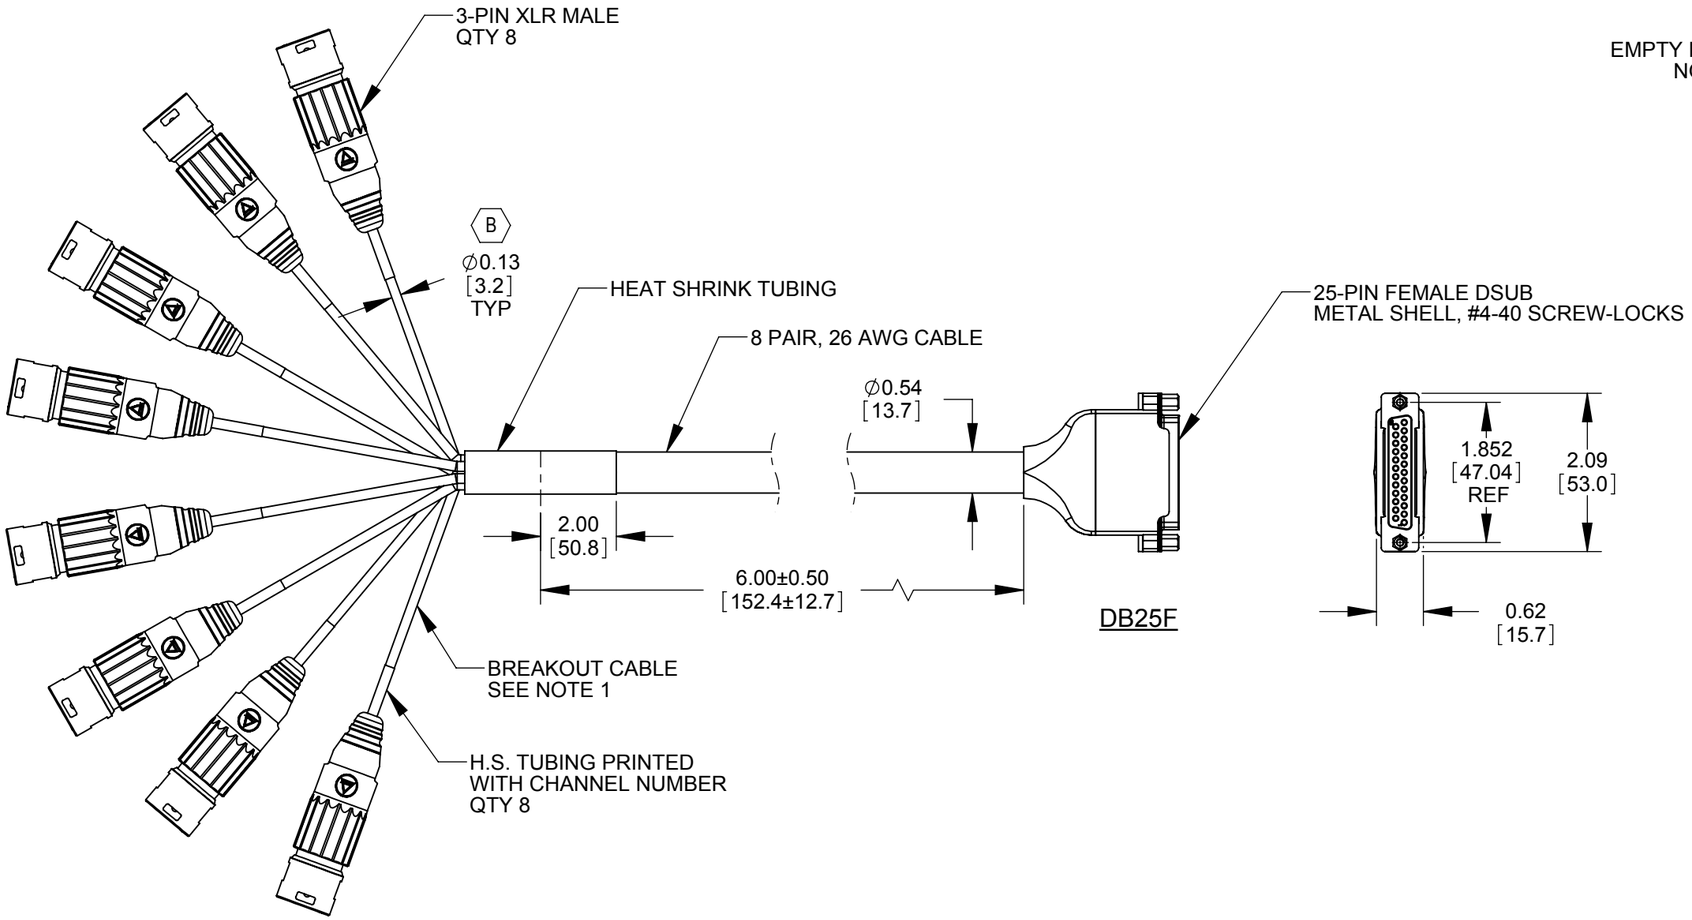

DB25F

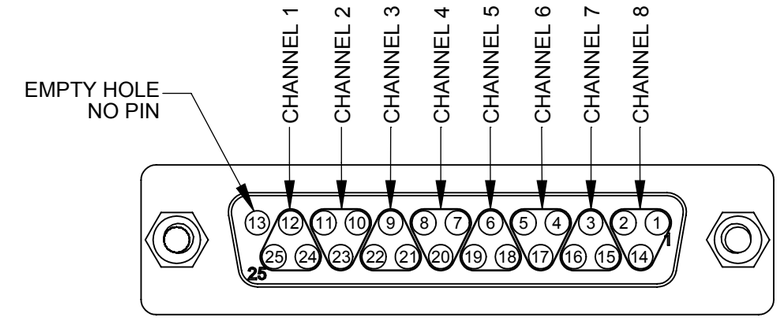

DB25F PIN-OUT VIEW

DB25F AND XLRM WIRING CHART

XLR (CHANNEL)	XLR (DESC.)	CABLE (COLOR)	PIN 2 (RED)	PIN 3 (BLACK)	PIN 1 (BARE)
1	XLRM	BROWN	24	12	25
2	XLRM	RED	10	23	11
3	XLRM	ORANGE	21	9	22
4	XLRM	YELLOW	7	20	8
5	XLRM	GREEN	18	6	19
6	XLRM	BLUE	4	17	5
7	XLRM	PURPLE	15	3	16
8	XLRM	GRAY	1	14	2

NOTES:

1. BREAKOUT CABLE LENGTH: 18 +/- 0.75 INCHES. SEE TABLE FOR COLOR.
2. (B) THIS PRODUCT COMES COILED AND PACKAGED IN BAG.
3. (B) MATERIALS:
   - XLR CONNECTORS:
     - HANDLE - ZINC ALLOY, NICKEL PLATED
     - HOUSING AND LATCH - ZINC ALLOY, NICKEL PLATED
     - INSULATOR - THERMOPLASTIC, GREEN
     - PINS - SPECIAL COPPER ALLOY, SILVER PLATED
   - H.S. TUBING - THERMOPLASTIC
   - DSUB:
     - CABLE CLAMP - COPPER, NICKEL PLATED
     - SHELL - STEEL, TIN PLATED
     - INSULATORS - THERMOPLASTIC
     - SCREW LOCKS - BRASS, NICKEL PLATED
4. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
C	27520	06/08/15	PC	TJK
B	26637	10/4/10	RS	TJK
A	26568	7/20/10	RS	TJK

REVISIONS

UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS IN INCHES [mm]
- TWO PLACE DECIMALS ±0.02 [0.5]
- THREE PLACE DECIMALS ±0.005 [0.13]

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE	WIDTH	MULT	LBS/M	TEMPER

FINISH
SPEC No.

MATERIAL
SPEC No.

FIRST USED ON

SCALE 1:2

DATE DRAWN	BY	CHKD	APVD
7/16/09	JGK	RS 11/30/10	TJK 11/30/10

Switchcraft®

SHEET 1 OF 1

NAME: DB25F TO 8-XLRM, RoHS

PART No.: DB25FXLRM

REV: C

SolidWorks CAD File (B)