

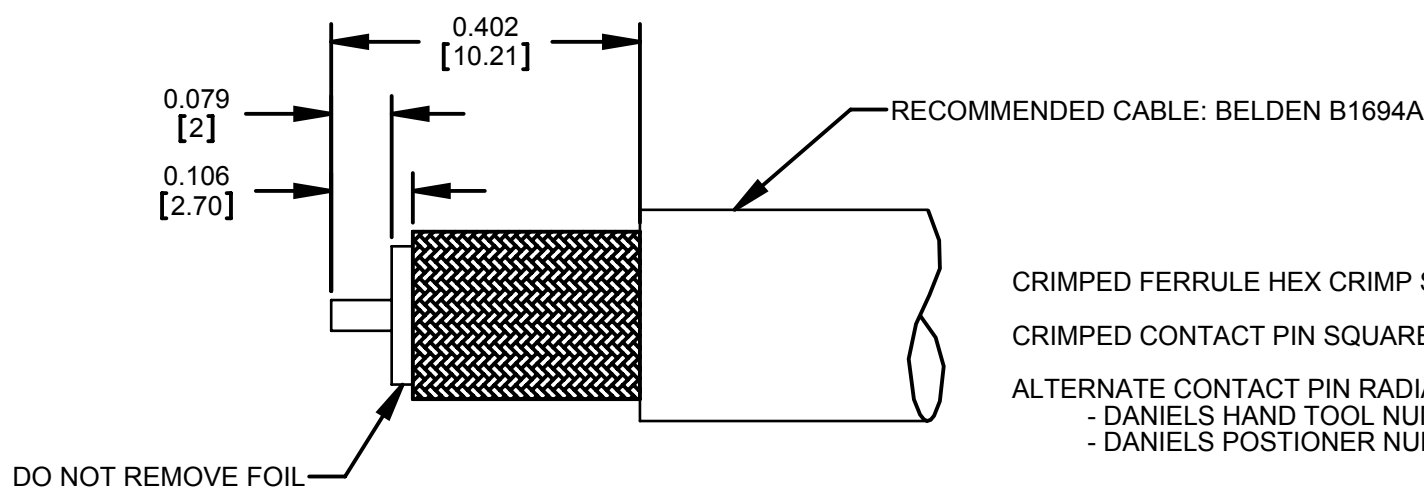


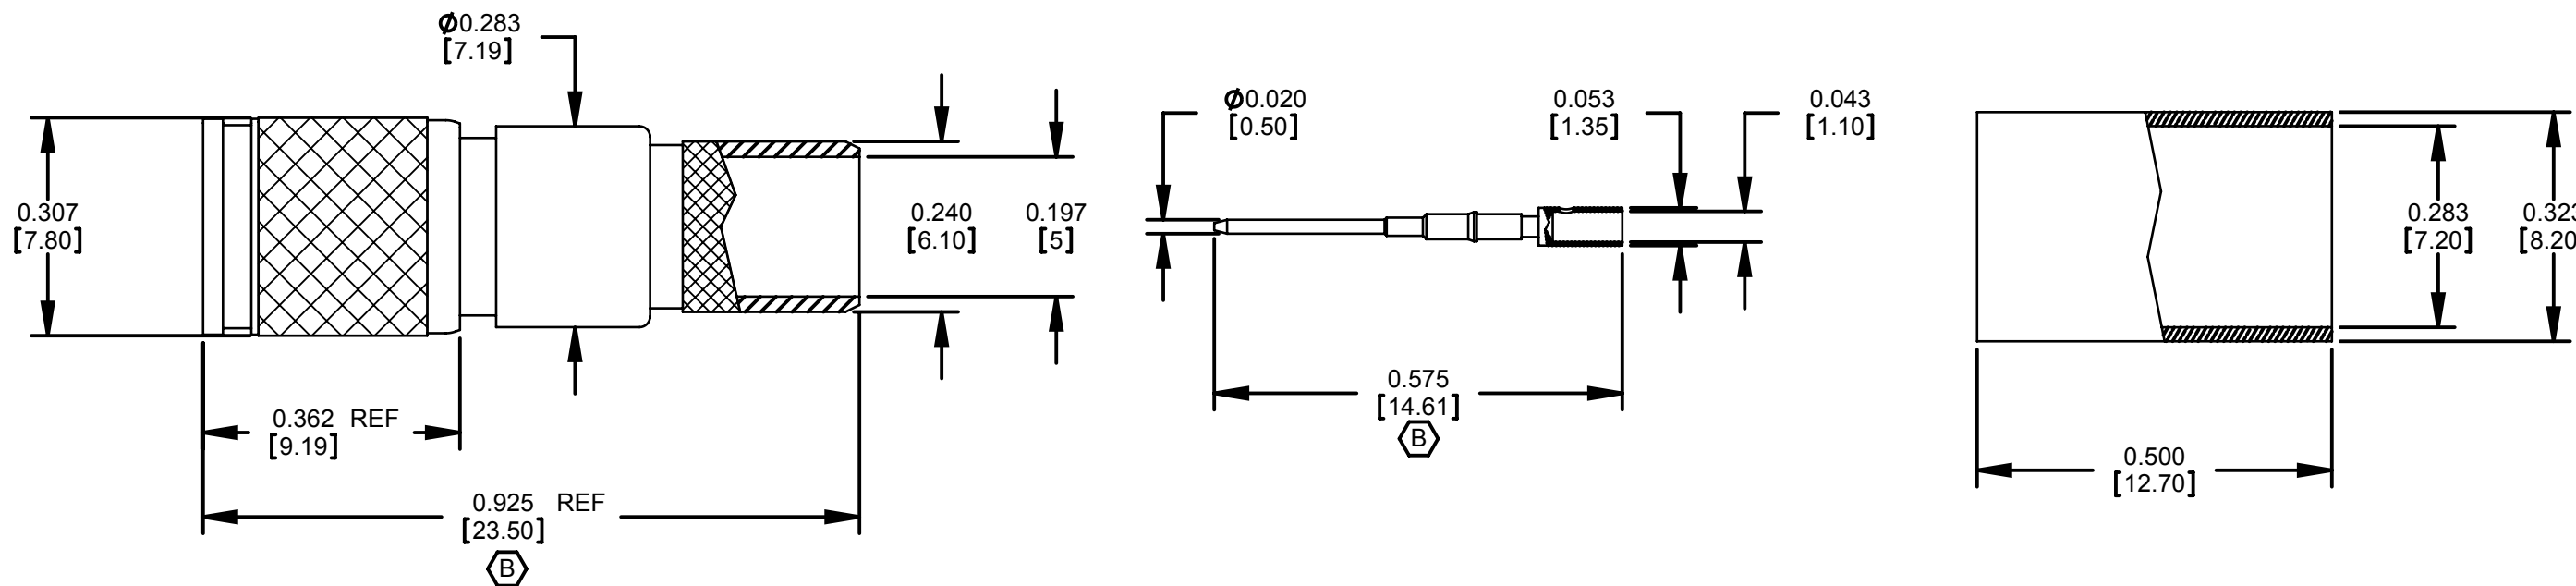

CRIMPED FERRULE HEX CRIMP SIZE .278 [7.08].
CRIMPED CONTACT PIN SQUARE CRIMP SIZE .042 [1.07].
ALTERNATE CONTACT PIN RADIAL CRIMP TOOL:
- DANIELS HAND TOOL NUMBER: MH995
- DANIELS POSTIONER NUMBER: K1803

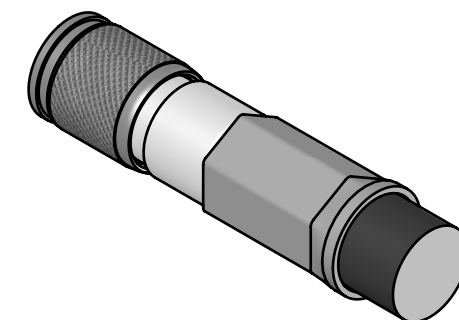

RECOMMENDED CABLE STRIPPING AND CRIMPING DIMENSIONS

NOTES:

1. BODY: COPPER ALLOY, NICKEL PLATED.
2. CONTACT PIN: COPPER ALLOY, GOLD PLATED.
3. SPRING: BERYLLIUM COPPER, NICKEL PLATED.
4. TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
5. INSULATOR: TEFLON
6. FERRULE: COPPER ALLOY, NICKEL PLATED.
7. CHARACTERISTIC IMPEDANCE: 75 OHMS, 3 GHz BANDWIDTH.
8. RETURN LOSS: MEETS HDTV SMPTE 424M SPECIFICATION.
9. DIMENSIONS ARE FOR REFERENCE ONLY.
10. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
						SIZE *	WIDTH *	MULT *	LBS/M *	TEMPER *	
						FINISH *			MATERIAL SEE NOTES		
						SPEC No. *			SPEC No. *		
						FIRST USED ON *		SCALE 4:1		Switchcraft® SHEET 1 OF 1	
B	26729	01/24/12	TS	BDS		DATE DRAWN	BY	CHKD	APVD		
A	26641	11/24/10	ZS	SRC		04/29/10	ZS	04/29/10	04/29/10		
							SRC	SRC			
REV	ECO NUMBER	DATE	BY	APVD	NAME			PART No.		REV	
REVISIONS					DO NOT SCALE DRAWING		DIN 1.0/2.3 PLUG, 75 OHMS, RoHS			DIN1694A B	