
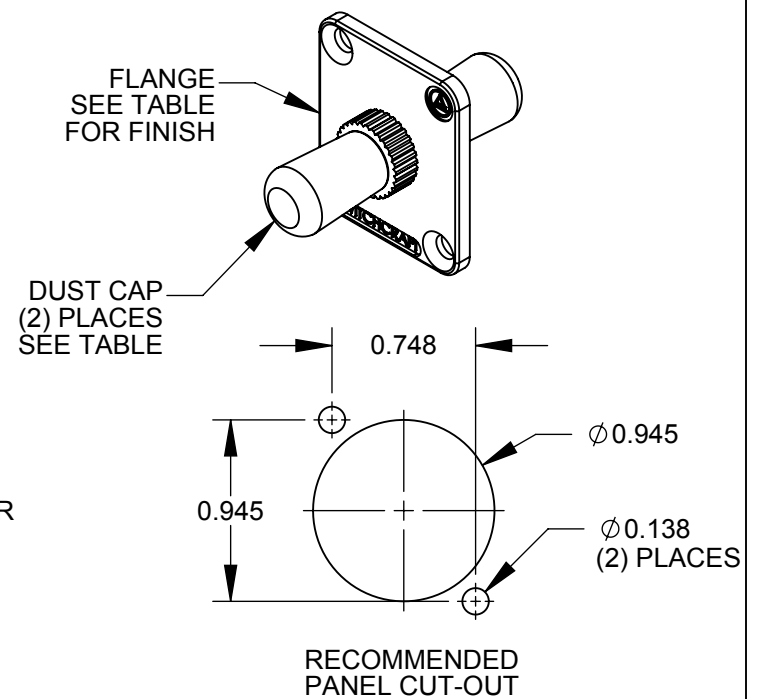
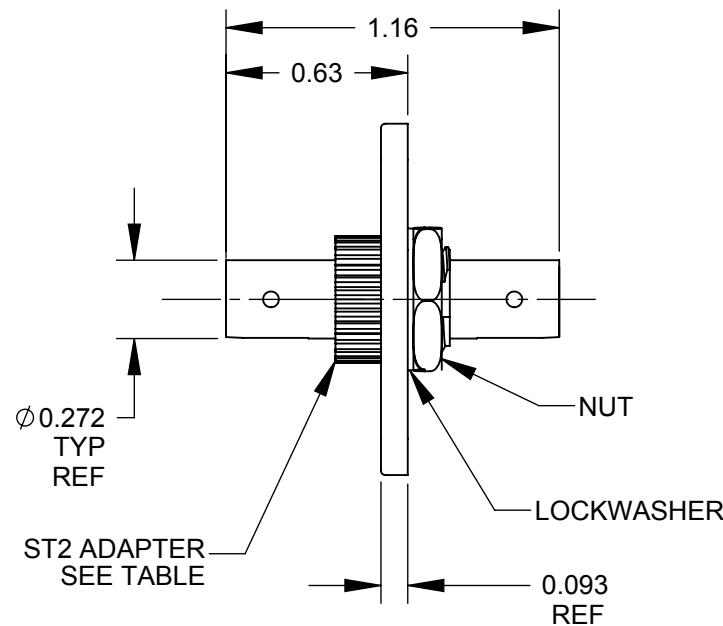


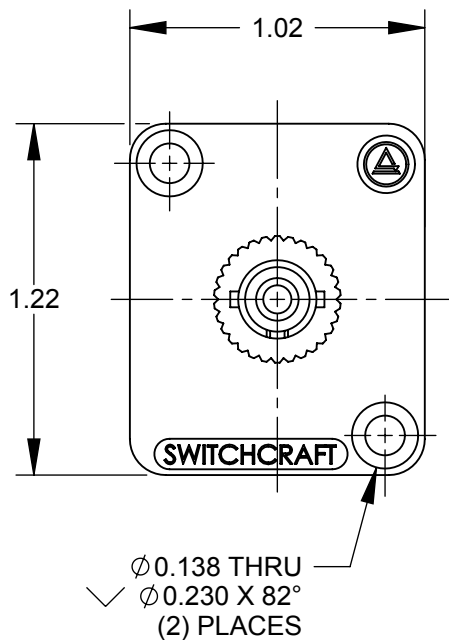

NOTES:

1. INSERTION LOSS: 0.25 dB MAX.
2. OPERATION TEMP: -40°C TO +80°C.
3. MATERIALS:

ST2 ADAPTER:

BODY - ZINC ALLOY
RETENTION WASHER - BRASS, NICKEL PLATED
SLEEVE - CERAMIC, SINGLE-MODE
- BRASS, MULTI-MODE

DUST CAPS - PVC

NUT - STEEL, NICKEL PLATED
LOCKWASHER - STAINLESS STEEL
FLANGE - ZINC ALLOY

4. THIS PRODUCT IS RoHS COMPLIANT.

PART NUMBER	ST2 ADAPTER SEE NOTE 3	DUST CAP COLOR	FLANGE FINISH
EHST2	SINGLE-MODE	RED	NICKEL
EHST2M	DOUBLE-MODE	BLACK	NICKEL
EHST2B	SINGLE-MODE	RED	BLACK CHROME
EHST2MB	DOUBLE MODE	BLACK	BLACK CHROME

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
						SIZE	WIDTH		MULT	LBS/M	TEMPER		
						FINISH				MATERIAL			
						SPEC No.				SPEC No.			
						FIRST USED ON			SCALE 1.5:1		Switchcraft®		
						DATE DRAWN	BY	CHKD	APVD				
A	26306	12/1/08	RS	TJK		5/12/08	JGK	RS 6/2/09	TJK 7/16/09				
REV	ECO NUMBER	DATE	BY	APVD	NAME					PART No.	REV		
REVISIONS					DO NOT SCALE DRAWING		E SERIES ST2 FIBER OPTIC ADAPTER				EHST2_SERIES		A

A	26306	12/1/08	RS	TJK
REV	ECO NUMBER	DATE	BY	APVD
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES

- TWO PLACE DECIMALS ±0.02

- THREE PLACE DECIMALS ±0.005

DO NOT SCALE DRAWING

SolidWorks CAD File

