



## Powerbase 70-T2i Instruction Manual

1. Using conversion box GP-DV-T2i the Powerbase 70 can supply 7.2V for Canon T2i cameras with a faux battery. It can also supply 12V for accessories through the conversion box PT socket.

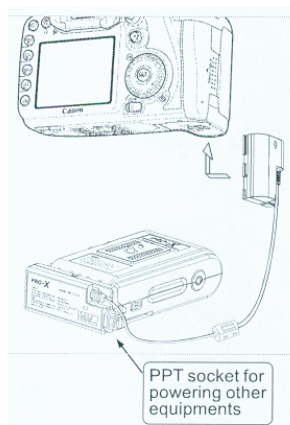


2. Included conversion box/cable applicable camera models:


Converter box/cable	Output Voltage	Adapt to DV type
GP-DV-CH	7.2V	Canon T2i

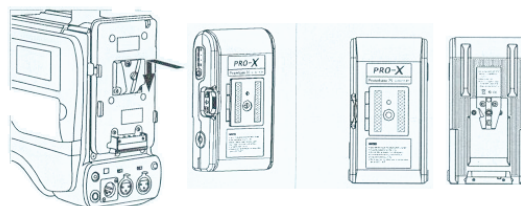

1. Can be used as normal V type brick battery
2. Built-in PT port can supply power for accessories or charging.



3. Quick release plate can be used to install wireless receiver, hard drive or other equipment or to connect two batteries.

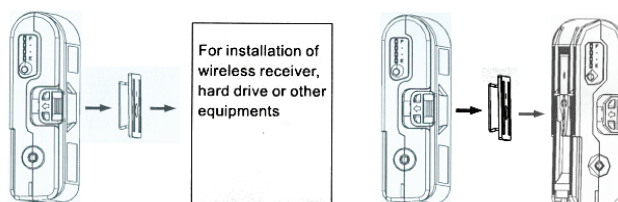

### Specifications

Rated Voltage: 14.8V  
Rated Capacity: 70Wh  
Charge Time: 3~5 hrs  
Dimensions: 6.25in x 3.4in x 2in  
Weight: 1.5lbs  
Four step LED power indication

Remaining Capacity (%)	LED1	LED2	LED3	LED4
0%	OFF	OFF	OFF	OFF
<10%	FLASH	OFF	OFF	OFF
10%-25%	ON	OFF	OFF	OFF
25%-50%	ON	ON	OFF	OFF
50%-75%	ON	ON	ON	OFF
≥75%	ON	ON	ON	ON

4. Both sides have a 1/4" 20 insert for installing other equipment

