

■DESCRIPTION


The ML-11T is a microphone/line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a balanced microphone/line input with removable terminal block connector, phantom power supply function, and gain and tone controls.

■SPECIFICATIONS

* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	25 mA
Input Sensitivity	-60/-20 dB* (changeable)
Input Impedance	10 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.0 dB
Distortion	0.05 % (1 kHz)
Gain	32 - 52 dB
Phantom Power	+22 V DC (active or disable selectable)
Connector	Removable terminal block (3P)
Dimensions	35 (W) × 78 (H) × 91.5 (D) mm (1.38" × 3.07" × 3.6")
Weight	Max. 49 g (0.11 lb)
Accessory	Removable terminal block (3P) ×1, Module mounting screw ×2

■APPEARANCE

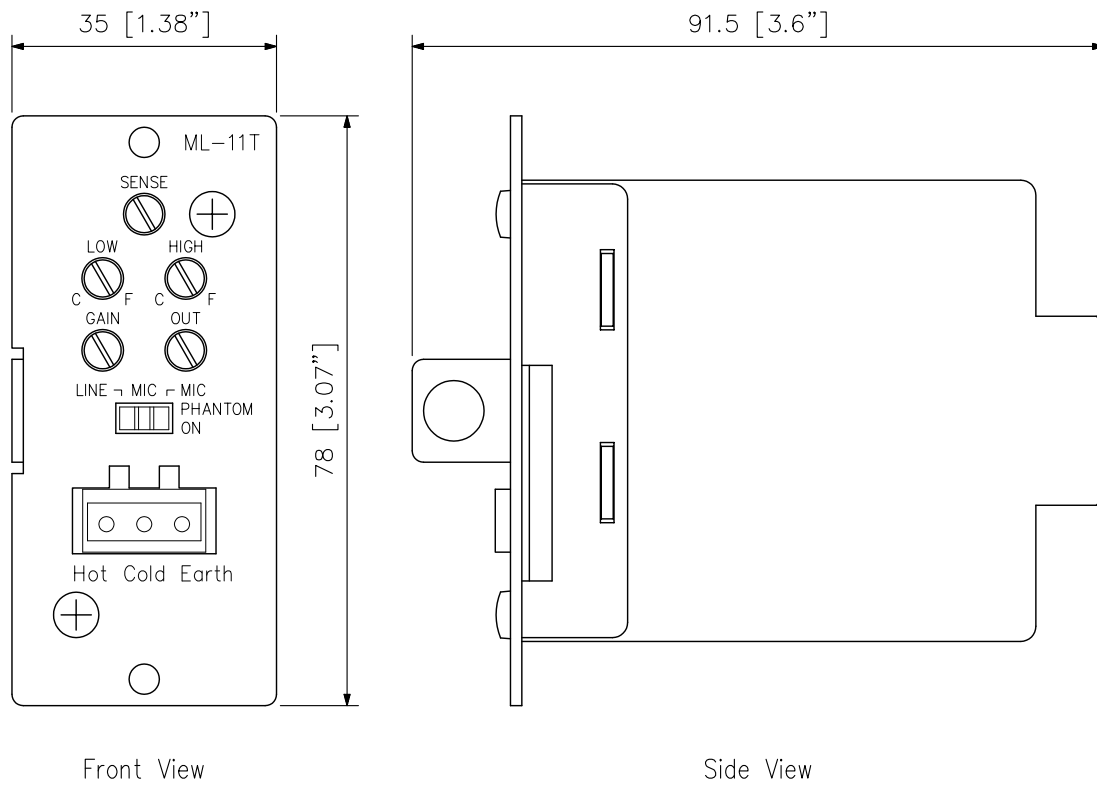

UNIT:mm SCALE:1/1