

DESCRIPTION

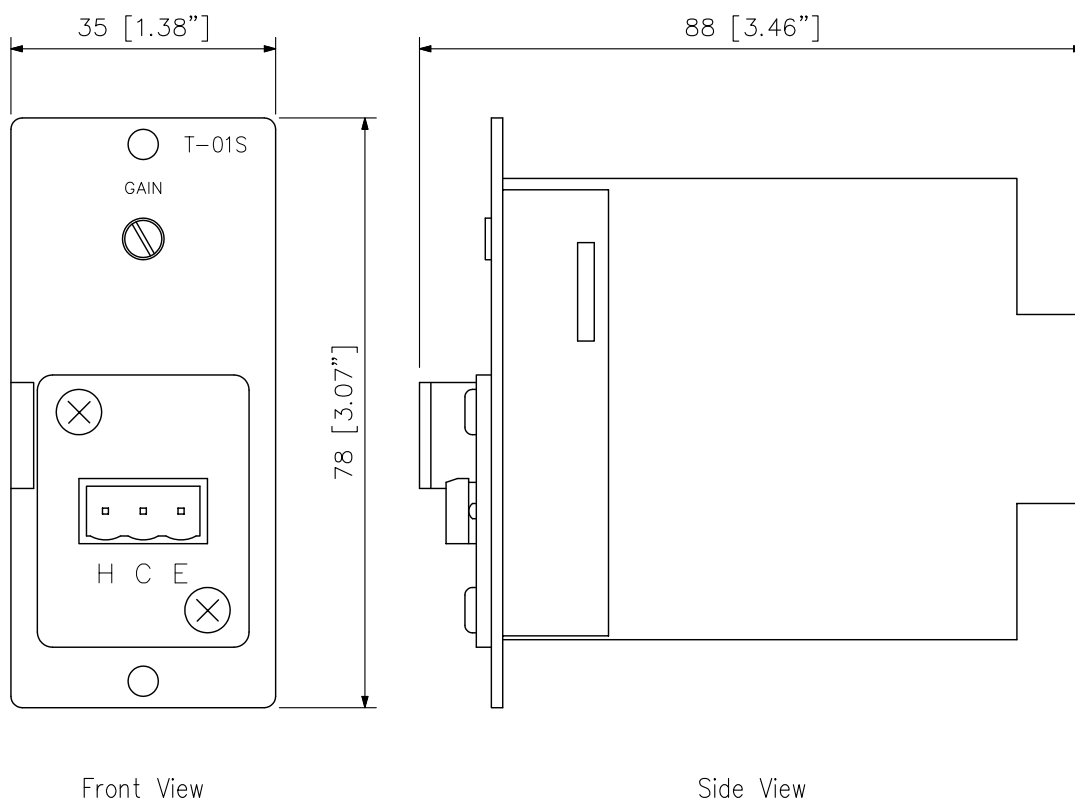
The T-01S is a line output module to be used in conjunction with the 900 series components and other TOA's equipment.

It has a transformer balanced line output with removable terminal block connector, and gain control.

SPECIFICATIONS

* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	35 mA
Output Level	Adjustable -22 to -6 dB* (at 600 Ω terminated, input: -20 dB*)
Output Impedance	600 Ω , balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ± 2.5 dB
Distortion	0.1 % or less (1 kHz, output: 0 dB*)
Noise Level	-90 dB* (20 Hz - 20 kHz BPF)
Gain	4 - 20 dB
Connector	Removable terminal block (3P)
Dimensions	35 (W) $\times$ 78 (H) $\times$ 88 (D) mm (1.38" $\times$ 3.07" $\times$ 3.46")
Weight	Max. 95 g (0.21 lb)

APPEARANCE


UNIT:mm SCALE:1/1