

■DESCRIPTION


The U-01F is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with female XLR type connector, and gain control.

■SPECIFICATIONS

\* 0 dB=1 V


Power Source	24 V DC (supplied from the main frame)
Current Consumption	4 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	Female XLR connector (XLR-3-31 equivalent)
Dimensions	35 (W) × 78 (H) × 88 (D) mm (1.38" × 3.07" × 3.46")
Weight	Max. 75 g (0.17 lb)

■APPEARANCE

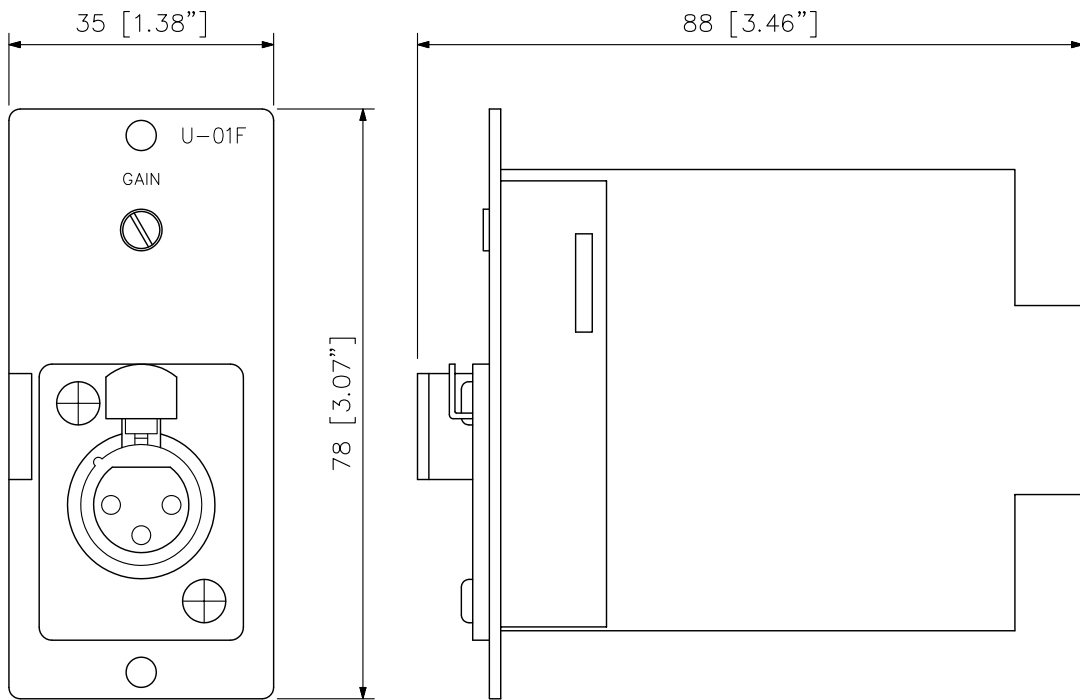

Front View

Side View

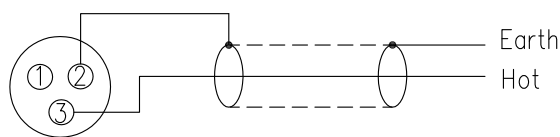

Connection Diagram

UNIT:mm SCALE:1/1