

DESCRIPTION



The U-01P is a line input module to be used in conjunction with the 900 series components and other TOA's equipment.
It has an unbalanced line input with $\phi 6.3$ (1/4") phone jack connector, and gain control.

SPECIFICATIONS

* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	4 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz ± 1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Connector	$\phi 6.3$ (1/4") Phone jack (3P)
Dimensions	35 (W) $\times$ 78 (H) $\times$ 88 (D) mm (1.38" $\times$ 3.07" $\times$ 3.46")
Weight	Max. 75 g (0.17 lb)

APPEARANCE

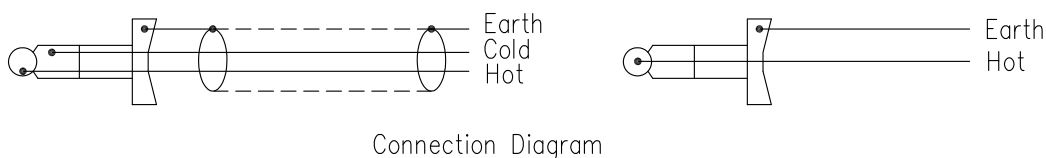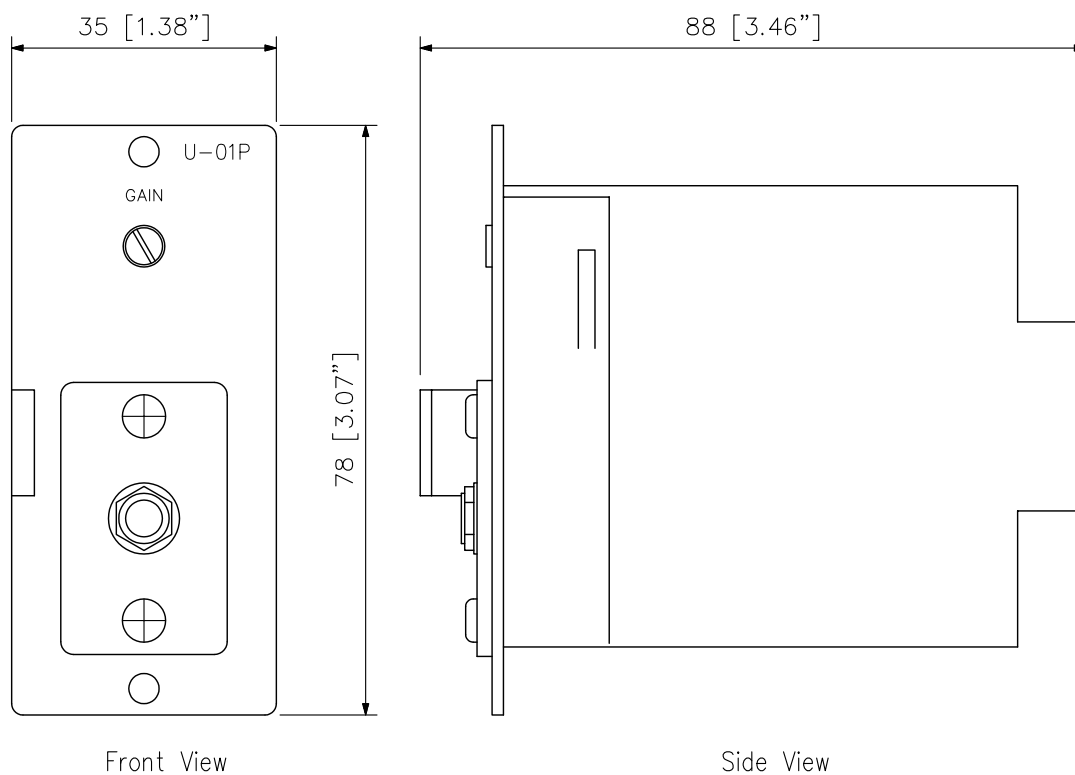

UNIT:mm SCALE:1/1