

DESCRIPTION


The U-12S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment.
It has an unbalanced line matching input with removable terminal block connector, mute-receive function and gain control.

SPECIFICATIONS

* 0 dB=1 V


Power Source	24 V DC (supplied from the main frame)
Current Consumption	27 mA
Input Sensitivity	-20 dB* (Rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.0 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Signal Muting Level	0 - 60 dB Adjustable (at 1 kHz)
Gain	-30 - 0 dB
Connector	Removable terminal block (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 60 g (0.13 lb)

APPEARANCE

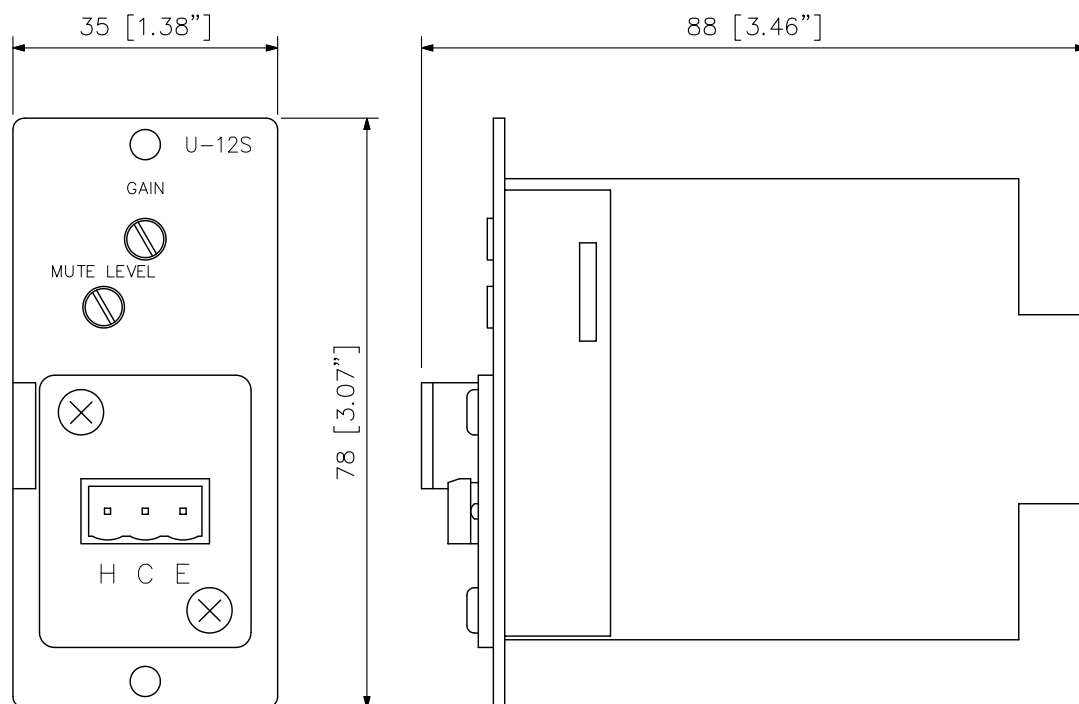

Front View

Side View

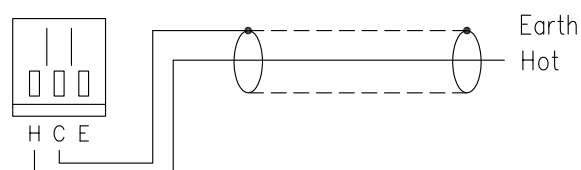

Connection Diagram

UNIT:mm SCALE:1/1