


# Technical Data Sheet

## Miniature RGBHV Coaxial Cable-Plenum

**WEST PENN WIRE**

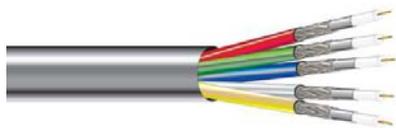

2833 West Chestnut Street  
 Washington, PA 15301  
 Toll Free: (800) 245-4964  
 Fax: (724) 222-6420  
 www.westpenn-wpw.com

<b>PART NUMBER:</b>	<b>255CRGB</b>
<b>DESCRIPTION:</b>	5- Miniature – 5 Conductor 25AWG Solid- Red, Green, Blue, Yellow, White Cables
<b>NEC RATING:</b>	CMP
<b>APPROVALS:</b>	(UL) C(UL) Listed or c(ETL)us Listed
<b>APPLICATION:</b>	Indoor for: RGBHV- Component Video-Plenum

### Individual Cable Construction Parameters:

Conductor	25 AWG Bare Copper
Stranding	Solid
Insulation Material	Foam FEP-Teflon
Insulation Thickness	.073" Nom.
Shield	100% Al. Foil + 95% Tinned Spiral Braid
Jacket Material	Copolymer
Individual Cable Diameter	0.105" Nom.

### Overall Cable Construction Parameters:

Jacket Material	Plenum PVC
Overall Cable Diameter	0.310" Nom
Number of Conductors	5 Center Conductor
Flame Rating	UL NFPA 62

### Electrical & Environmental Properties:

		<u>Mhz</u>	<u>db/100ft</u>
Temperature Rating	-20deg C to 60deg C	1	.49
Max. Capacitance Between Conductors @ 1 KHz	16.2 pf/ft Nom.	10	1.70
Velocity of Propagation	82% Nom.	71.5	4.65
Impedance	75 ohms Nom.	135	6.10
DC Resistance per Conductor @ 20deg C	32.5 Ohms/1M' Nom.	360	10.04
Jacket Color	Red, Green, Blue, Yellow, White	720	14.14
Overall Jacket Color	Black	1000	17.85
RoHS Compliant	Yes	2250	24.60
		3000	38.81

### Connectors and Accessories

75 ohm BNC Crimp	CN-BM74-19	Crimp Tool: TL-105	Strip Tool: TL-825
1 Pc. Compression BNC 75 ohm	CN-BNCP-RGB	Comp. Tool: TL-548G	Strip Tool: TL-CSST
Compression RCA	CN-RCAP-RGB	Comp. Tool: TL-548G	Strip Tool: TL-CSST
HD15-VGA Terminal Block	CN-HD15FST or CN-MX15F (Female) or CN-MX15M (Male)		
HD15 Solder	40-9515HDM (Male) or 40-9515HDS (Female) – Hood- 40-9709HS		

Specification Issue Date: 7/06

This document is the property of West Penn Wire.  
 The information contained herein is considered  
 Proprietary and not to be reproduced by any means  
 Without written consent of West Penn Wire

Standard Lengths are 1000ft.  
 The Jacket is sequentially footmarked.  
 The information presented here is, to the best of our  
 knowledge, is true and accurate. However, since  
 conditions of use are beyond our control, all  
 recommendations or suggestions are presented  
 without guarantee or responsibility on our part. We  
 disclaim all liability in connection with the use of  
 information contained herein or otherwise.

