

# Thank You!

for purchasing this Westcott® product.

## Register your purchase.

We have a simple form for registering your Westcott purchase that provides you with added assurance for your gear: [fjwestcott.com/warranty](http://fjwestcott.com/warranty)

## Visit [fjwestcott.com](http://fjwestcott.com)

- Video Tips
- Product Support
- Knowledge Base
- Product Reviews
- Contests & More!

## WARRANTY

### One year against manufacturer defect.

Westcott's warranty obligations for this product are limited to the terms set forth below: The F.J. Westcott Co. ("Westcott") warrants this Westcott branded product against defects in materials and workmanship under normal use for a period of ONE (1) YEAR from the date of retail purchase by the original end-user purchaser ("Warranty Period"). If a defect arises and a valid claim is received within the Warranty Period, at its option and to the extent permitted by law, Westcott will either (1) repair the defect at no charge, using new or refurbished replacement parts, or (2) exchange the product with a product that is new or which has been manufactured from new or serviceable used parts and is at least functionally equivalent to the original product. This Limited Warranty applies only to products manufactured by or for Westcott that can be identified by the "Westcott" trademark, trade name, or logo affixed to them.

This warranty does not apply: (a) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (b) to damage caused by operating the product outside the permitted or intended uses described by Westcott; (c) to a product or part that has been modified to alter functionality or capability without the written permission of Westcott.; or (d) to cosmetic damage, including but not limited to scratches, dents and broken plastic.

Please contact Westcott's Repair Department for a Return Authorization Number "RMA" prior to requesting warranty service. This RMA must be clearly written on the outside of the box to the left of the shipping label. Items sent in without pre-authorization or that do not fall under the ONE (1) YEAR limited warranty will be returned at the expense of the sender.

Repair Dept.: **800-886-1689** / 419-243-7311 (International)

E-Mail: [INFO@FJWESTCOTT.COM](mailto:INFO@FJWESTCOTT.COM) SUBJECT: ATTN: REPAIR DEPT.

Shipping: F.J. Westcott Co, 1425 Holland Rd, Maumee, OH 43537 ©F.J. WESTCOTT CO. ALL RIGHTS RESERVED.1214US.



---

QUICK START GUIDE

---

## IN THE BOX



10" X 10" FLEX™ LED MAT



DIMMER CONTROL



POWER SUPPLY



POWER CORD



X-BRACKET MOUNT\*



16' WATERPROOF EXTENSION\*




1/4-STOP DIFFUSER\*


\*INCLUDED WITH KITS & SOLD SEPARATELY

## SETUP & USAGE

Please follow the diagram to connect the Flex LED mat to a power source.

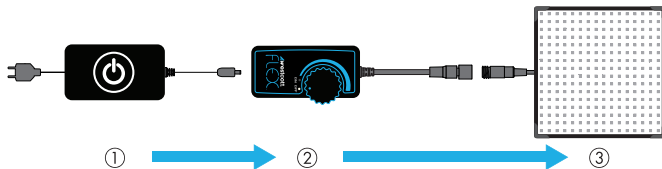


When using the optional Waterproof Extension, please follow the diagram to connect the Flex LED mat to a power source.

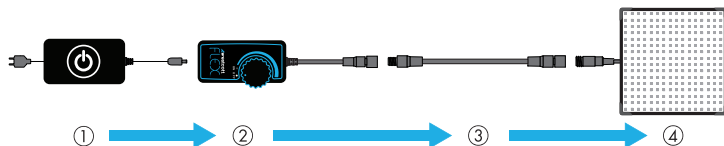

*Note: Always connect the Westcott Flex in the order shown above. Failure to do so could result in electrical damage to the Westcott Flex.*

## POWER CONTROL

To power on the Flex LED mat, turn the dial on the Dimmer Control clockwise.



ON

OFF

This dial also controls the output of the Flex LED mat. To brighten, turn the dial clockwise. To dim, turn the dial counter-clockwise.

To power off the Flex mat, turn the dial on the Dimmer Control counter-clockwise until it clicks.

## MOUNTING FLEX KIT



1. To mount the Flex LED mat to the optional Flex X-Bracket Mount, locate the pockets located on the rear corners of the Flex LED mat. Each arm of the Flex X-Bracket Mount will fit securely into each of these pockets.



2. Once the Flex LED mat is mounted securely on the Flex X-Bracket Mount, the Flex can be mounted to any stand or surface via the X-Bracket Mount clip.



3. Once placed in desired position, the Flex LED's output can be diffused by placing the optional Flex LED Diffusion Panel onto the X-Bracket Mount. To diffuse, first locate the X-Bracket Mount's adjustable extension pieces.



4. Place each of the adjustable pieces into each corner of the Flex Diffusion Panel and adjust until secure.

