

IFB2115

Featherweight Large Bi-Color Kit w/ 2x IFB1024 & 1x IFB576
w/ AB to V-Mount Adapter Plate

ONE SHEET

Overview

The 3-Point Light Kit features include bi-color capabilities and a 60-degree angle that delivers reliable, consistent performance.

The IFB1024 Featherweight Bi-Color LED and the IFB576 Bi-Color LED Light features energy efficient LED lights that allow you to easily adjust and control the color temperature between 3200K Tungsten and 5600K Daylight using the LCD touchscreen. Large rotary knobs and an included remote are also offered for dimming and dialing in color temperature. The compact design with integrated yoke mount makes both the IFB1024 and IFB576 portable and easy to set up. For portable power a pro battery plate for either Sony V-mount (-S) or Anton Bauer (-A) is supplied. A removable diffuser is included and the pre-mounted four leaf barn doors with intensifiers can be folded flat for transportation.



IFB2115 | Featherweight Large Bi-Color Kit w/ 2x IFB1024 & 1x IFB576 | UPC Code: 847983013630

Special Features

- Color Temperature of 3200K - 5600K
- 2 x IFB1024 + 1 x IFB576 Fixtures with Stands and Bags
- Ultra-Light, Compact, Dual-Color Light
- LCD Touch-Screen Controller and Dimmer Knobs
- Includes Pro Battery Plates for Anton Bauer & Sony V Mount
- Includes Yoke Mount, Barn Doors with Intensifiers, and Diffuser

Recommended For

- Studio Lighting
- Product Photography



www.facebook.com/ikanseit



www.twitter.com/ikancorp



www.vimeo.com/ikancorp



www.youtube.com/ikancorp

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com

IFB2115

Features you need, Prices you want.



Specifications

Beam Angle	60°
Build Material	Heavy Duty Plastic
Control	Touchscreen
Cooling System	Passive Cooling
Dimming	10-100%
Fixture Weight	4 lbs & 6 lbs
Focusing	NO
Head Type	Bi-Color
Lens	60° Lens
Mount	Yoke
Power Supply	12v @ 3.33 Amps & 12v @ 6.66 Amps
Rating	120v @ 60Hz
Weight	29 lbs
Shipping Weight	30 lbs
Shipping Dimensions	18" x 18" x 24"

What's Included

- 1 x Heavy Duty Light Stand (HD-STND)
- 1 x Stand Bag (BG-STND)
- 1 x ID1000 3-Lights Kit Bag (IBG1000-3L)
- 2 x IFB1024 Light
- 1 x IFB576 Light

Photometrics

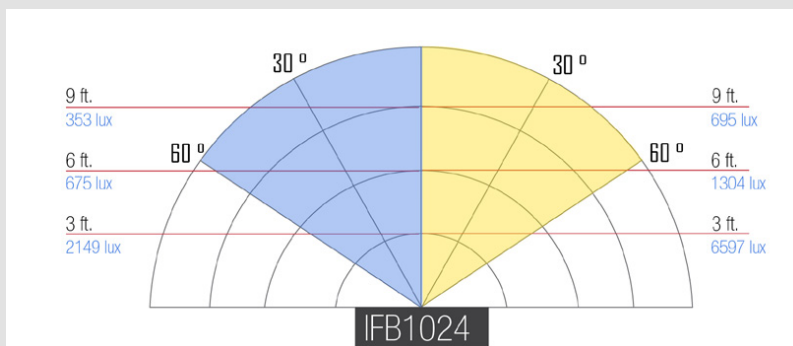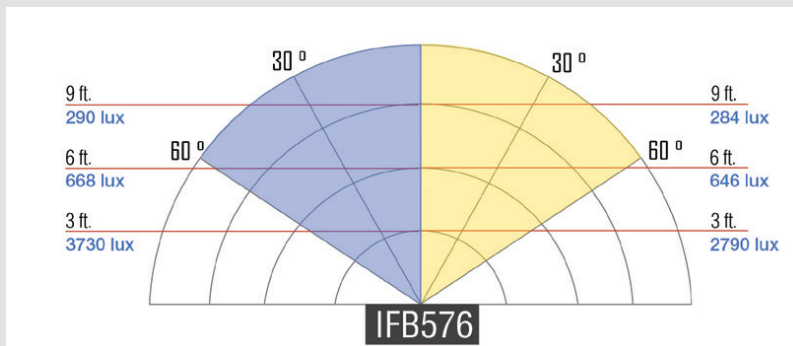

Specifications for IFB576

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 41 watts / 44 watts / 82 watts
Beam Angle	50°
Foot Candles	323.9 / 409.0 / 587.2
Color Temperature	3200K(±200K) / 4000K (±200K) / 5600K (±200)
Brightness	3' / 6318 lux (±100K) / 4000K (±100K)
Light Source	288 0.06w @ 5600K / 288 0.06w @ 3200K
Fixture Size	14" x 8.5" x 2.75"

Specifications for IFB1024

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 82 watts
Beam Angle	50°
Foot Candles	506.6 / 961.3 / 613.1
Color Temperature	3200K (±100K) / 4000K(±100K) / 5600K (±100K)
Brightness	3' / 10543 lux (±100K) / 5600K (±100K)
Light Source	512 0.06w @ 5600K / 512 0.06w @ 3200K
Fixture Size	14" x 14" x 2.75"

Optional Accessories

- AB101** Anton/Bauer Power Tap Cable w/ Coaxial
- AB102** Anton/Bauer Power Tap Cable w/ 4-Pin XLR

