

IFB576

Featherweight Bi-Color LED Light with AB & V-Mount Plates

ONE SHEET

Overview

The 3-Point Light Kit features include bi-color capabilities and a 60-degree angle that delivers reliable, consistent performance.

The IFB576 Featherweight Bi-Color LED Light features 576 energy efficient LED lights that allow you to easily adjust and control the color temperature between 3200K Tungsten and 5600K Daylight using the LCD touchscreen. Large rotary knobs are also offered for dimming and dialing in color temperature. The compact design with integrated yoke mount makes the IFB576 portable and easy to set up. A multi-voltage AC power supply is included and for portable power a pro battery plate for both Sony V-mount and Anton Bauer is supplied. A removable diffuser is included and the pre-mounted four leaf barn doors with intensifiers can be folded flat for transportation.



IFB576 | Featherweight Bi-Color LED Light with AB & V-Mount Plates | **UPC Code:** 847983008926

Special Features

- Ultra-light, Compact, Dual-Color Light
- LCD Touch-Screen Controller with Dimmer Knobs
- Includes Pro Battery Plates for Anton Bauer & Sony V-mount
- Yoke Mount, Barn Doors with Removable Intensifiers, and Diffuser

Recommended For

- Studio Lighting
- Product Photography

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com



www.facebook.com/ikanseeit



www.twitter.com/ikancorp



www.vimeo.com/ikancorp



www.youtube.com/ikancorp

IFB576

Features you need, Prices you want.

Full-Spectrum, Cinema Quality Color

With 576 Bi-Color LED bulbs, ikan's IFB576 is a powerful flood light that lets you enjoy soft, beautiful light and excellent color purity in just about any shooting scenario. This is the LED light you've been looking for.

Easy-to-Adjust Light Intensity

With a touch-sensitive digital display, a dimmer knob, and a remote control, you have options when it comes to adjusting the light intensity. The IFB576 puts you in control so you can get the perfect lighting for your shot every time.

Exceptional Quality

As the IFB576 light comes equipped with an AB to V-Mount pro battery plate, barn doors with intensifiers, diffuser, power supply, remote control, and yoke mount, it is an exceptional value.

What's Included

- 1 x IFB576 Light
- 1 x AB Mount (Attached)
- 1 x AB to V-Mount Adapter
- 1 x Diffuser
- 1 x Power Supply
- 1 x Remote Control
- 1 x Yoke

IFB576 Lights Available in Multiple Kits

IFB576-2PT-KIT
IFB2511

IFB576-KIT
IFB2115

Specifications


Beam Angle	50°
Brightness	3' / 6318 lux / 4000K (±100K)
Build Material	Heavy Duty Plastic
Color Temperature	3200K(±200K) / 4000K(±200K) / 5600K (±200K)
Control	Local Knob & Touchscreen
Cooling System	Passive Heat Sync
Dimming	10-100%
Fixture Size	14" x 8.5" x 2.75"
Fixture Weight	4 lbs
Focusing	N/A
Foot Candles	323.9/ 409.0/ 587.2
Head Type	Bi-Color
Lens	60° Lens
Light Source	288 0.06w LED @5600K 288 0.06w LED @ 3200K
Mount	Yoke
Operating Volts	12-14.8v
Operating Wattage	44 w @ 120v/60Hz
Power Supply	12v @ 3.33 Amp
Rating	120v @ 60 Hz
Shipping Weight	9 lbs
Shipping Dimensions	14" x 18" x 5"

Optional Accessories

C-2KA-KIT
C-2KS-KIT
PWRGP-1
ID500-PS
ID500-RC
CH1546

AB Mount Pro Power System
V-Mount Portable Pro Power System
Power Grip
Power Supply for ID500/IB500
Remote Control for ikan Lights
Chimera for IFB546/IFD576

Photometrics

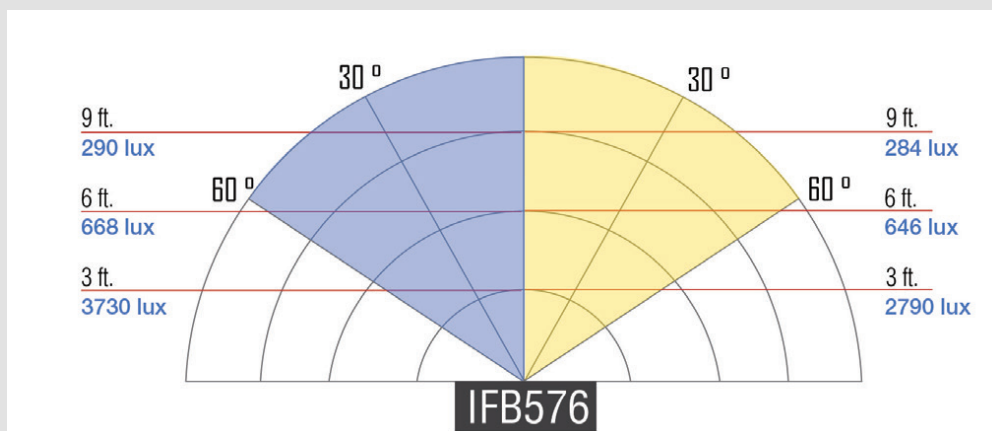

ikan

Houston, Texas

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com