

# IFD2511

Featherweight Large Kit w/ 2x IFD576 & 1x IFD1024  
with AB to V-Mount Adapter Plates

ONE SHEET

## Overview

The 3-Point Light Kit features include 5600K daylight capabilities and a 50-degree angle that delivers reliable, consistent performance.

The IFD576 Featherweight Daylight LED Light and the IFD1024 Featherweight Daylight LED features energy efficient LED lights that are dimmable in 1 step increments from 10-100% using the LCD touchscreen. A large rotary knob and an included remote are also offered for dimming and powering the unit on and off. The compact design with integrated yoke mount makes both the IFD576 and IFD1024 portable and easy to set up. A multi-voltage AC power supply is included and for portable power a pro battery plate for either Sony V-mount (-S) or Anton Bauer (-A) is supplied. A removable diffuser is included and the pre-mounted four leaf barn doors with intensifiers can be folded flat for transportation.



IFD2511 | Featherweight Large Kit w/ 2x IFD576 & 1x IFD1024 | UPC Code: 847983013609

## Special Features

- Ultra-light, Compact, Dual-color Light
- LCD Touch-Screen Controller with Dimmer Knobs
- Includes Pro Battery Plates for Anton Bauer & Sony V-mount
- Yoke Mount, Barn Doors with Removable Intensifiers, and Diffuser

## Recommended For

- Studio Lighting
- Product Photography



[www.facebook.com/ikanseeit](http://www.facebook.com/ikanseeit)



[www.twitter.com/ikancorp](http://www.twitter.com/ikancorp)



[www.vimeo.com/ikancorp](http://www.vimeo.com/ikancorp)



[www.youtube.com/ikancorp](http://www.youtube.com/ikancorp)

ikan

[www.ikancorp.com](http://www.ikancorp.com)

1.713.272.8822

[sales@ikancorp.com](mailto:sales@ikancorp.com)

# IFD2511

Features you need, Prices you want.



## Kit Specifications

Beam Angle	50°
Build Material	Heavy Duty Plastic
Control	Touchscreen
Cooling System	Passive Cooling
Dimensions	18" x 18" x 24"
Dimming	10-100%
Fixture Weight	4 lbs & 6 lbs
Focusing	NO
Head Type	Daylight
Lens	60° Lens
Mount	Stand Mount
Power Supply	12v @ 3.33 Amps & 12v @ 6.66 Amps
Rating	120v @ 60Hz
Weight	26 lbs
Shipping Weight	27 lbs

## What's Included

- 1 x IFD1024 Light
- 2 x IFD576 Light
- 1 x Light Kit Bag
- 1 x Stand Bag
- 3 x AB Battery Plates (Attached)
- 3 x AB to V-Mount Adapter Plates
- 3 x Heavy Duty Light Stands

## Photometrics

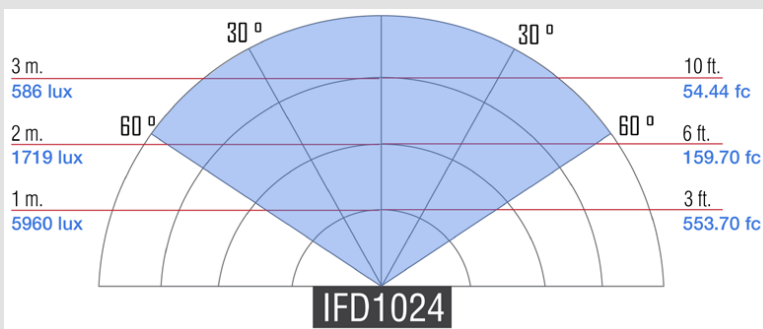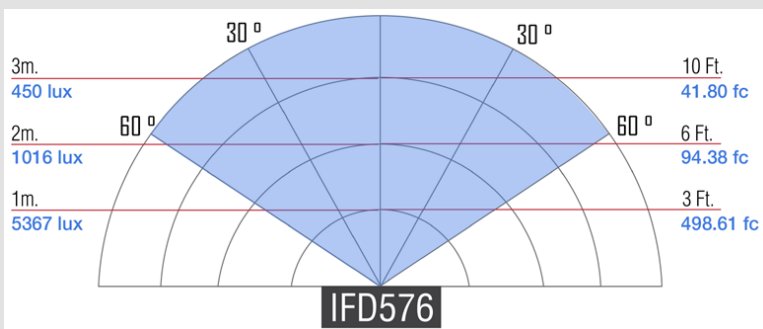

## Specifications for IFD576

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 46 watts
Beam Angle	50°
Foot Candles	520.6
Color Temperature	5600K (±200)
Brightness	3' / 5602 lux (±100) / 5600K (±100K)
Light Source	576 0.06w @ 5600K
Fixture Size	14" x 8.5" x 2.75"

## Specifications for IFD1024

Operating Volts	12-24v
Operating Wattage	120v/60Hz: 82 watts
Beam Angle	50°
Foot Candles	979.8
Color Temperature	5600K (±100K)
Brightness	3' / 10543 lux (±100K) / 5600K (±100K)
Light Source	1024 0.06w @5600K
Fixture Size	14" x 14" x 2.75"

## Optional Accessories

- AB101** Anton/Bauer Power Tap Cable w/ Coaxial
- AB102** Anton/Bauer Power Tap Cable w/ 4-Pin XLR

