

# iLED312-v2

## Bi-Color Flood Light

ONE SHEET

### Bi-Color Lighting

The popular iLED312-v2 Bi-Color Flood Light is designed and built for professional videographers, cinematographers and photographers who want high-quality, versatile LED lights at an affordable price.

The 7 ¾" x 4 ½" light contains 312 energy-efficient LEDs and delivers field-tested reliability, solid construction, and other features essential to professional performance such as bi-color capability and a wide, 60-degree angle. Color temperature on the iLED312-v2 can be easily adjusted between 3200K Tungsten and 5600K Daylight using the rotary knobs. A digital readout confirms your setting. The compact design with integrated horizontal and vertical interlock makes the iLED312-v2 portable, easy to set up, and work well with a variety of lighting kit combinations.

*Bonus: Included with the iLED312-v2 are a removable diffusion gel filter, slide-on barn doors that can be folded flat, a carrying case, 2 Sony L batteries, and a dual charger.*



iLED312-v2 | iLED312-v2 Bi-Color Flood Light | UPC Code: 847983007691

### Special Features

- Wide-Angle Beam Pattern
- Analog Controls with Digital Readout Display
- LCD Battery Life Indicator
- Slide-on Barn Doors
- Removable Diffusion Gel Filter
- Horizontal / Vertical Interlock Options

### Recommended For

- Studio Lighting
- Event Lighting
- On-Camera Lighting
- Interviews

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com



[www.facebook.com/ikanseit](http://www.facebook.com/ikanseit)



[www.twitter.com/ikancorp](http://www.twitter.com/ikancorp)



[www.vimeo.com/ikancorp](http://www.vimeo.com/ikancorp)



[www.youtube.com/ikancorp](http://www.youtube.com/ikancorp)

# iLED312-v2

Features you need, Prices you want.

## Wide Angle Beam Pattern

The 7 3/4" x 4 1/2" light contains 312 energy-efficient LEDs and delivers field-tested reliability, solid construction, and other features essential to professional performance such as bi-color capability and a wide, 60-degree angle.

## Digital Readout Display

An easy-to-view digital readout indicates battery life as you shoot, as well as; brightness level and color temperature, for the simplest of adjustments.



## Horizontal/Vertical Interlock Options

The iLED312-v2 has the capability to interlock with multiple units to create a larger, more intense light.



## What's Included

- 2 x Sony "L" Series DV Batteries
- 1 x A/C Adapter
- 1 x Barn Doors
- 1 x Diffusion Filter
- 1 x Dual Battery Charger
- 1 x Soft Carrying Case
- 1 x Ultra-Heavy Duty Shoe Mount (SM201)

## Specifications


Build Material	Heavy Duty Plastic
Control	Local Knob Control
Focusing	N/A
Dimming	10-100%
Head Type	Bi-Color
Yoke	N/A
Lens	60°
Beam Angle	60° Wide Beam Angle
Light Source	156 0.06w LED/156 0.06w LED 3200K
Power Supply	12v @ 2 Amps
Rating	120 volts, 60hrz
Cooling System	Passive Heat Sync
Fixture Size	7.75" x 1.5" x 4.5"
Fixture Weight	1.5 lbs
Shipping Weight	2 lbs

## Available in Multiple Kits

The iLED312v2 lights are also available in various kit combinations that provide added value in the form of stands, bags or other accessories. Visit ikancorp website for more options.

iLED312-v2	iLED312-v2-2PT-KIT	IBK2513-v2	IBK2315-v2
IBK25013-v3	IBK23150-v3	IDK4312-v2	

## Photometrics

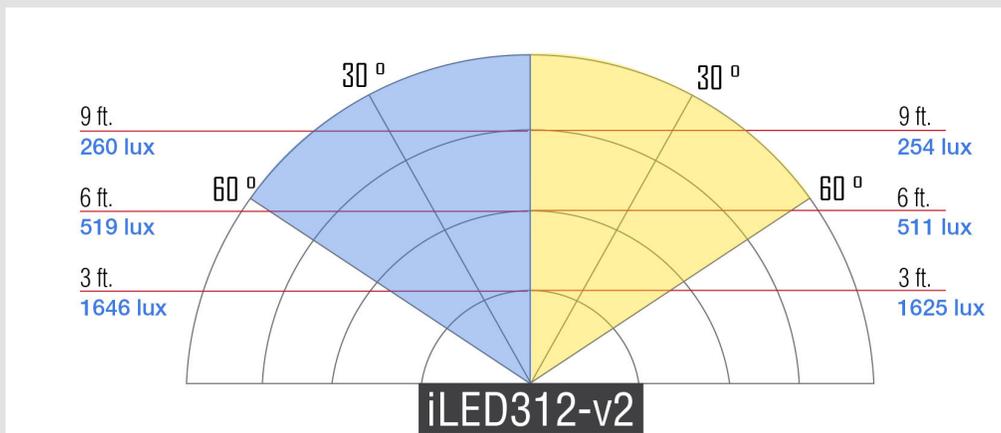

ikan

Houston, Texas

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com