

RM7Ki

Dual VK7i Rackmount QUICKSTART GUIDE



What's included

RM7ki Rack Unit


AC Adapter

Checked by

ikan

RM7Ki

Dual VK7i Rackmount QUICKSTART GUIDE

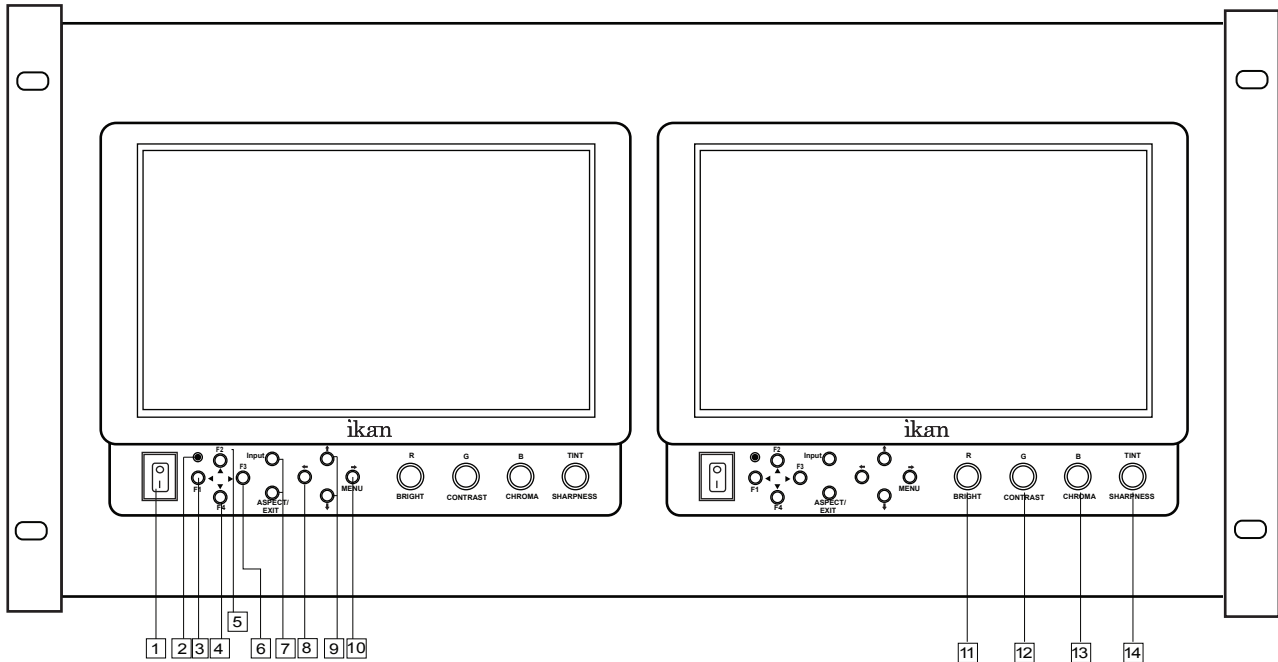


- 1 Power Switch**
Power ON / OFF
- 2 Power Indicator Light**
When the power is ON, the LED green lights up
- 3 F1 / ◀ Button**
Function key actions are selected in the menu
- 4 F4 / ▼ Button**
Function key actions are selected in the menu
- 5 F2 / ▲ Button**
Function key actions are selected in the menu
- 6 F3 / ▶ Button**
Function key actions are selected in the menu
- 7 Input & Aspect/Exit Buttons**
Aspect: 16:9, 4:3, Full
In MENU, it is to exit the menu
- 8 ◀ Button**
Toggle left in MENU setting mode
- 9 ↑ and ↓ Buttons**
Toggle up and down in MENU setting mode
- 10 → / MENU Button**
Toggle right in MENU setting mode
In MENU, push button to select menu setting
- 11 BRIGHT/R Knob**
Adjust brightness 0 - 100 (50)
Adjust red channel
- 12 CONTRAST/G Knob**
Adjust contrast 0 - 100 (50)
Adjust green channel
- 13 CHROMA/B Knob**
Adjust chroma 0 - 100 (50)
Adjust blue channel
- 14 TINT/SHARPNESS Knob**
Adjust tint 0 - 100 (50)
Adjust sharpness 0 - 100 (10)
- 15 TALLY Indicator Lights**

User programmable function buttons. For quick access, the user may program the F1 and F2 buttons to enable frequently accessed monitor features.

RM7Ki

Dual VK7i Rackmount QUICKSTART GUIDE

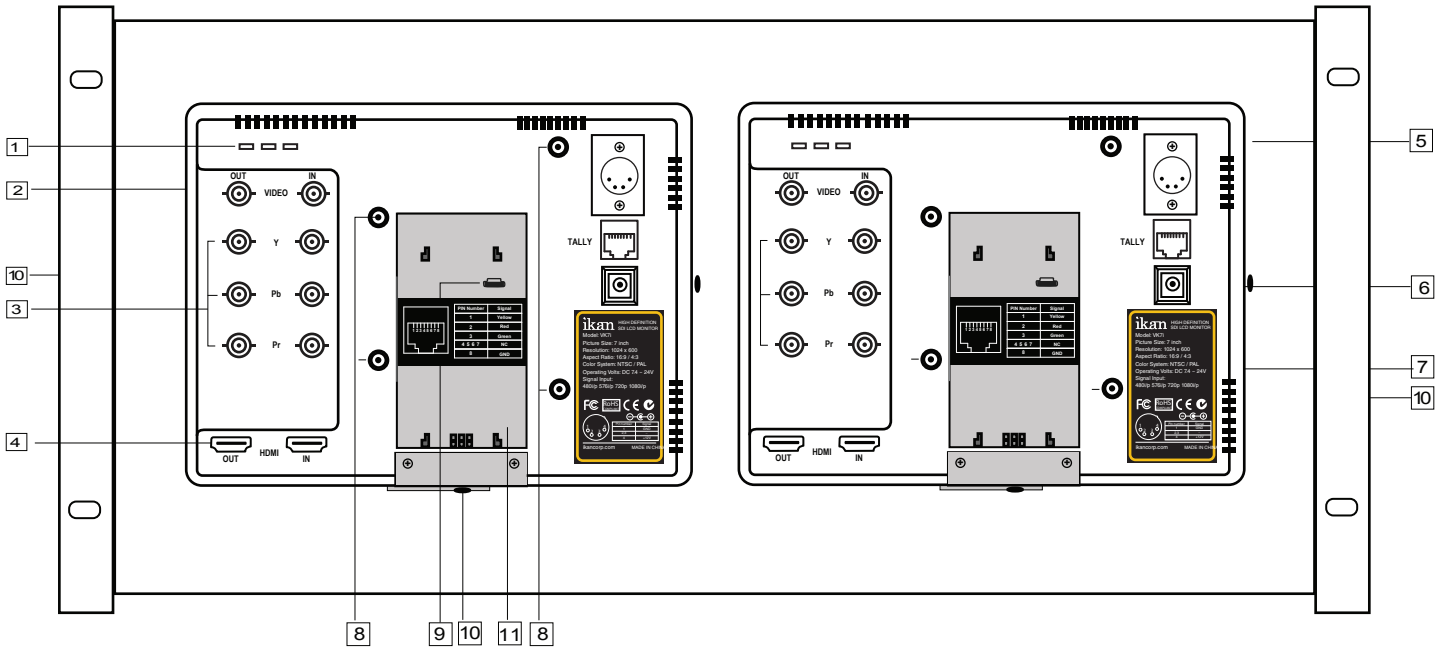

- 1 TALLY Indicator Lights**
- 2 VIDEO terminal (BNC)**
IN : Composite signal input terminal
OUT : Input signal through-out terminal
- 3 YPbPr terminal (BNC)**
IN : Component signal input terminal
OUT : Input signal through-out terminal
- 4 HDMI terminal**
IN : HDMI input terminal
OUT : Input signal through-out terminal
- 5 DC 12V-24V power terminal**
XLR DC Connection
- 6 TALLY Input Connector**
RJ45 Connection
- 7 DC 7-24V power terminal**
Standard DC Connection

- 8 VESA 100mm Mount Holes**
Threaded for M3x.07 screws. Use to attach pro battery plate adapter or for mounting third party vesa mounts.
- 9 USB terminal**
For factory service use only
- 10 1/4-20 Threaded insert (on three sides of monitor)**
Mounting Monitor
- 11 DV Battery Plate Slot**
Mounting ikan DV battery plate

RM7Ki

Dual VK7i Rackmount QUICKSTART GUIDE

SPECIFICATIONS:

Material:	Steel / Plastic
Screen Size:	7"
Aspect Ratio:	16:10
Resolution:	1280 x 800
Viewing angle:	178° horizontal/178° vertical
Display Technology:	IPS
Brightness:	400 cd/m2
Contrast Ratio:	800:1
Response Time:	30ms
Inputs:	HDMI, Composite, Component
Outputs:	HDMI, Composite, Component
Built In Speaker:	N/A
Power Consumption:	8W
Color System:	PAL/NTSC/SECAM (Auto-Detected)
Input Voltage:	DC 7V - 24V
Operating Temperature:	0°C ~ 50°C (32°F ~122°F)
Dimensions:	8.75 x 19 x 2.37"
Weight :	6 lbs
Shipping Dimensions:	9.6 x 22 x 2.8"
Shipping Weight:	8 lbs
Dimensions (Metric):	222 x 482 x 60mm
Weight (Metric):	2.7 kg
Shipping Dimensions (Metric):	243.8 x 558.8 x 71mm
Shipping Weight (Metric):	3.62 kg
UPC Code:	847983012596

Supported Resolutions

HDMI 720x480i & 720x480p @ 59.94, 60 Hz
720x576i & 720x576p @ 50 Hz
1280x720p @ 50, 59.94, 60 Hz
1920x1080i @ 50, 59.94, 60 Hz
1920x1080psf @ 24, 25, 29.97, 30 Hz
1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz

Component 720x480i @ 60 Hz
720x576i @ 50 Hz
1280x720p @ 23.97, 24, 25, 29.94, 30 Hz
1280x720p @ 50, 59.94, 60 Hz
1920x1080i @ 50, 59.94, 60 Hz
1920x1080psf @ 24, 25, 29.97, 30 Hz
1920x1080p @ 23.97, 24, 25, 29.94, 30 Hz

Composite NTSC-M, NTSC-J, NTSC 4.43
PAL B/G H I D, PAL M, PAL N
SECAM