



VPTR-24 Mobile Video Production Trailer

DESCRIPTION

The VPTR-24 is a rack ready 24 foot x 8.5 foot deluxe professional video and audio production trailer with a ceiling height of 6'6". It's a modern fully equipped outside broadcast (OB) vehicle fully heated and air conditioned and pre-wired with heavy duty AC wiring.

The production trailer has a professional all white exterior and looks great parked outside or inside an arena, corporate meetings, media tours, DVD production, webcasts, downstreaming, religious programming, or news/sports events. Also provides a low cost portable inside control room for professionals who need a quick and economical solution for broadcast and cable productions close to the TV/shooting set. The cut/directing can be done simultaneously to the footage, needed for live transmissions or useful to minimize post production costs. Also ideally suited for TV studios and stations with a limited budget.

5 six foot high 19" racks comprise the monitor-equipment wall. A laminated 8 foot wide console sits in front of the rack wall for your switcher. Two additional half-sized work consoles are located in the main work area.

The interior of the production trailer is carpeted and finished in a no-glare medium grey high tech acoustic control fabric. The cabin is fully heated and air conditioned for your comfort. The trailer is fully wired for AC shore power. Stylish and dimmable track lighting. Outside quartz task lighting.

A 5' x 8' separate work room with one six foot rack and two 7RU Horizontal Bridged racks with counter top. This is also where you access the rear of your rack wall. A full size AC power distribution center controls the trailers electrical system.

The trailer size is perfect with it's extended 6'6" ceiling height. The extended 8.5 ft. width gives the user a true 8 ft. interior width. There is a 36" wide passenger door on the curb side of the unit and also a 36" wide rear entry door.


Other production features include 3 cable feed-thru hatch doors plus a full audio, video, CAT5, fiber and telco I/O panel outside hatch door featuring Canare and Neutrik connectors for quick and efficient interfacing.

Standard Features

Dexter Torflex Twin Axles
E-Z Lube Hubs w/ Grease Zerk
Premium Radial Tires
White Mod Style Wheels
Smooth Exterior White Aluminum
45,000 BTU Roof (3)AC Unit
Generous 6'6" Interior Head Room
36" Lockable Passenger Door
4 Lockable Cable I/O Doors

Finished Laminate Ceiling w/ Lighting
Grey Industrial Carpeted
8 Ft. Console Table
Heavy Duty AC Wiring with 12-Circuit Breaker Panel & Generator Interface
Thermally Insulated
Dual Rear Stabilizers
2,600 Lbs. of Extra Gear Carrying Capacity
4,400 Lbs. Curb Weight
Six 19" Racks (37RU Per Rack)
Two 19" Racks (8RU Per Rack)

OVER HEAD VIEW

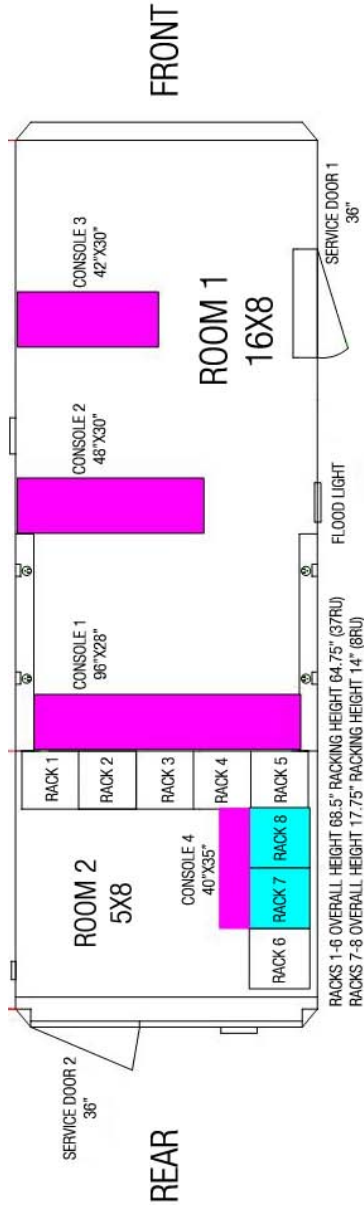

POWER DISTRIBUTION SYSTEM

MAIN SERVICE PANEL
MASTER CUT-OFF SWITCH
& UTILITY OUTLET



COVER OPEN
SHOWING BREAKERS



POWER INLET RECEPTACLE
LOCATED AT BOTTOM
OF SAFETY SWITCH

POWER OPTIONS



MAIN SERVICE PANEL
MASTER CUT-OFF SWITCH
& UTILITY OUTLET



POWER INPUT CABLE
LL550C TWIST-LOCK

Option 1




220VAC HOUSE POWER
60A SERVICE

Option 2



220VAC GENERATOR POWER
60A SERVICE

POWER DISTRIBUTION CENTER / BREAKER LAYOUT

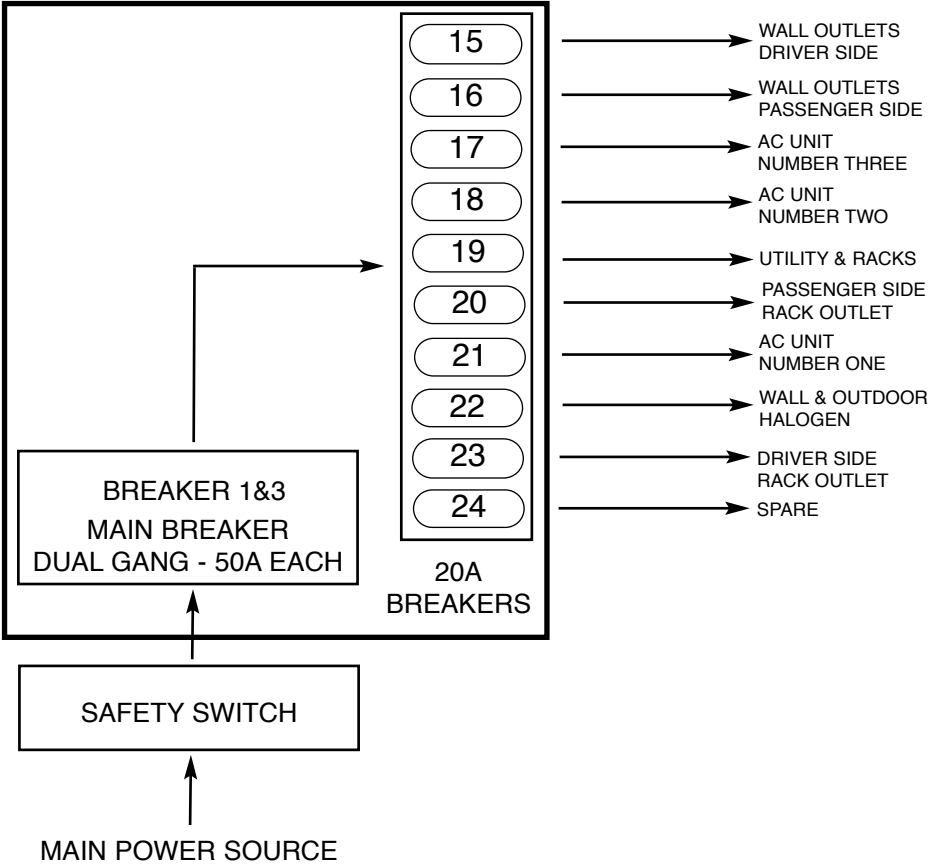


POWER INPUT CABLE DETAIL



LL550C
CONNECTOR





LL550P
MALE TWIST LOCK

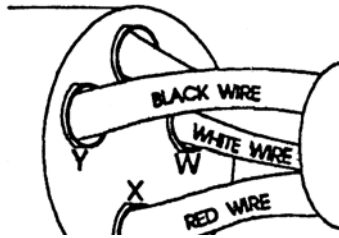



CONNECTOR WIRING DETAIL

TRAILER HITCH CABLE DETAIL

4-WAY PLUG

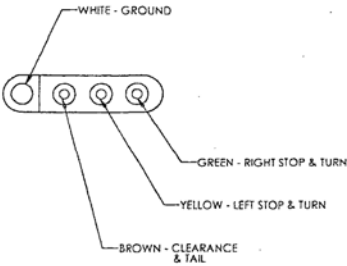

7-WAY PLUG

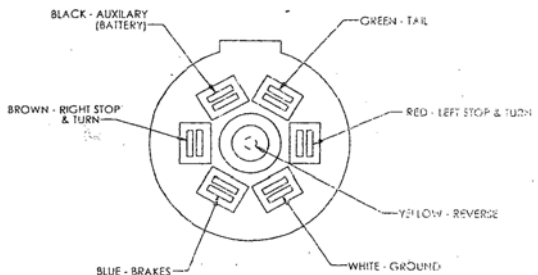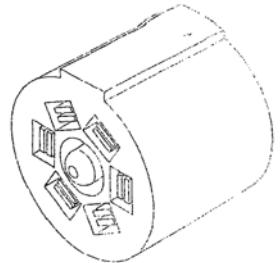

REPORTING SAFETY DEFECTS

If you believe that your trailer has a defect that could cause a crash or could cause injury or death you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying TecNec Distributing.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer or Markertek Distributing.

To contact NHTSA, you may either call the Auto Safety Hotline at **1-800-424-9393**, (366-0123 in Washington, DC) or write to:

**NHTSA
U.S. Department of Transportation
400 7th Street SW, (NSA-11)
Washington, DC 20590**

You can also obtain other information about motor vehicle safety from Markertek:

**Markertek Video Supply
1 Tower Drive
Saugerties, NY 12477
(800) 522-2025
www.markertek.com**

NOTES



ATTENTION

THIS TRAILER HAS REAR STABILIZING LEVELERS WHICH MUST BE DEPLOYED ONCE THE TRAILER IS IN LOCATION.

IT IS VERY IMPORTANT TO LIFT THE STABILIZERS BEFORE MOVING THE TRAILER.