


20 Foot Stock Production Trailers

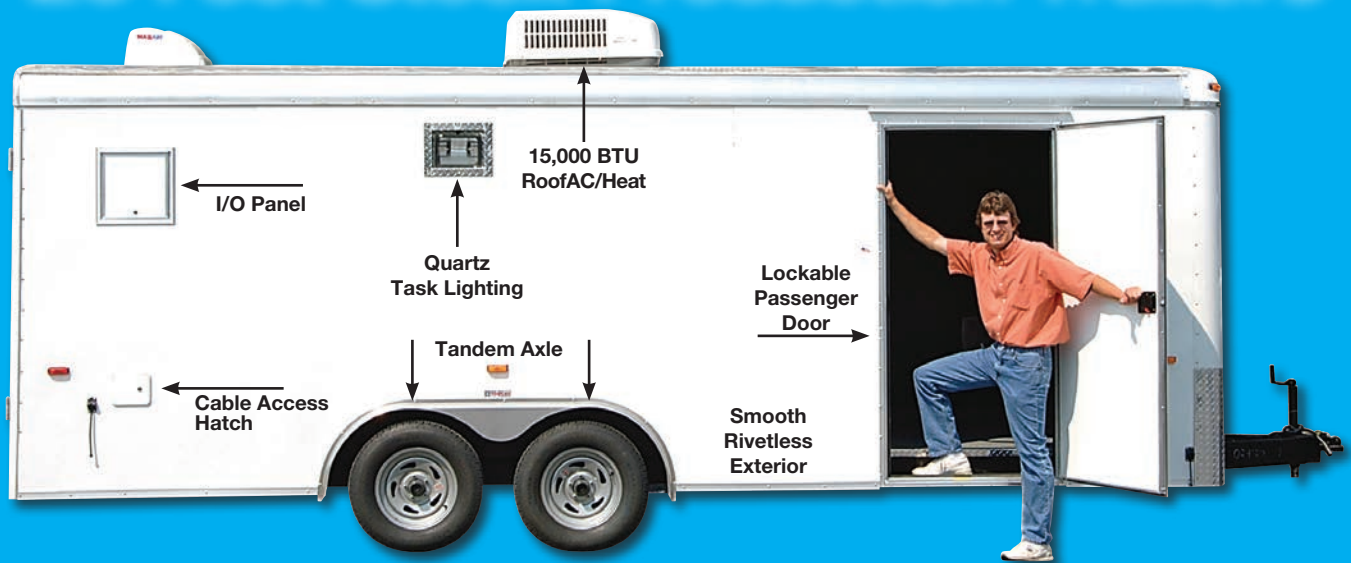

**Fully Finished Inside and Out • Heat & AC • 5 Racks • Console • I/O Panel
Carpeted • Track Lighting • Breaker Panel w/Generator Input • Tows w/SUV**

VPTR-1 20 Foot Model Standard Features

- 20 Foot x 8.5 Foot
- White Aluminum Rivetless Exterior (Colors Available)
- Generous 80" Interior Head Room
- 1 Motorized Roof Vent w/Rain Guard
- Finished Laminate Ceiling w/Lighting
- 8 Ft. Console Table
- 4 Ft. Producer's Console Table
- Dexter Torflex Twin Axles (2x 3500 Lb.)
- 3,000+ Lbs. of Extra Gear Carrying Capacity
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Dual Rear Stabilizers
- Bright Front Corners - ATP Stoneguard
- Fully Insulated Walls & Ceiling
- Grey Industrial Carpeted Walls & Floors
- 15,000 BTU Roof AC Unit with Heat Strip
- 36" Lockable Passenger Door
- 40" Lockable Rear Door
- 4 Lockable Cable I/O Hatches
- Premium Radial Tires & Gray Mods
- Five 19" Racks (37RU Per Rack)
- Aluminum Pull-Out Steps
- Exterior Quartz Light
- Observation Deck Available

VPTR-1 Specifications

OVERALL LENGTH: 23'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 19'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER: #1: 7RU
 #2-4: 13RU
 #5: 6RU
MAIN COUNTER TOP SIZE: 8' x 24"

ELECTRICAL CAPACITY AT PANEL:
 220/50AMPS Single Phase • 25 Amps per leg

Additional Payload Capacity By Axle Size:
 (Standard/Stock x2): 3500/3000 Lbs. Approx.


Optional Axles:
 5200/6500 Lbs. Approx.
 6000/8000 Lbs. Approx.
 7000/10,000 Lbs. Approx.
 8000/12,000 Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds & colors are available. Speak to a customer service representatives for more details.

Model VPTR-1

24 Foot Stock Production Trailers

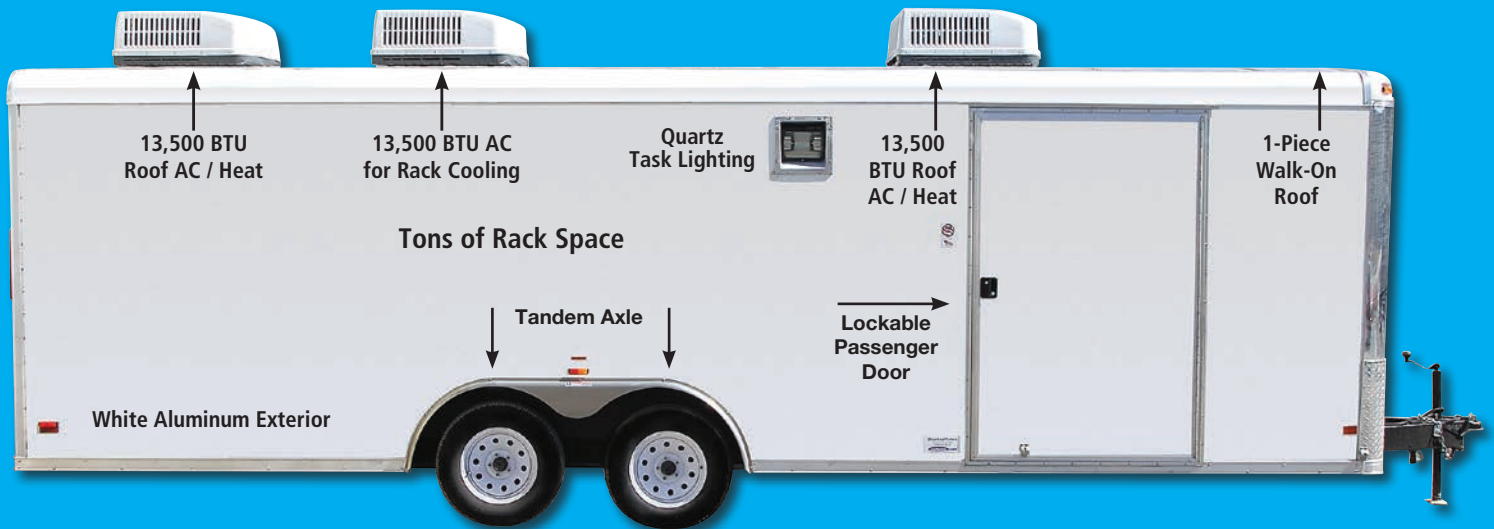

**Fully Finished Inside & Out • Dual Suite - 1-Front / 1-Rear • Heat & AC • 6 Racks
• Console • I/O Panel • Carpeted • Track Lighting • Breaker Panel w/Generator Input**

VPTR-24 Standard Features • 24 Foot Dual Suite Model

- Dexter Torflex Twin Axles (2x 5,200 Lb.)
- 24 Foot x 8.5 Foot
- White Aluminum Rivetless Exterior (Colors Available)
- Climate Controlled
- 2 Separate Locking Suites
- Generous 80" Interior Head Room
- Deluxe 'Control Room' Interior
- Exterior Quartz Light
- Dual Rear Stabilizer Jacks
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Optional Spare Tires Available
- Fully Insulated Walls & Ceiling
- Premium Radial Tires & Gray Mods
- 2x 13,500 BTU Roof AC / Heat Strip Units
- 1x 13,500 BTU Equipment Rack AC Unit
- 36" Lockable Passenger Door
- 40" Lockable Rear Door
- Six 19" Racks @ 37RU & Two @7RU
- Breaker Box w/ Generator Input
- I/O Panel & Cable Hatches
- Tows Easily With any Class 3 Hitch

VPTR-24 Specifications

OVERALL LENGTH: 27'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 23'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER:
 Forward: #1: 7RU • #2-4: 13RU • #5: 6RU
 Aft: #6: 37RU • #7&8: 7RU
MAIN COUNTER TOP SIZE: 8' x 24"
WORK COUNTERS: Forward: 30" x 48" (2x)
 Aft: 28" x 36" (1x)

ELECTRICAL CAPACITY AT PANEL:
 220/60AMPS Single Phase • 30 AMPS per leg

Additional Payload Capacity By Axle:
 (Standard/Stock x2): 5200/4600+ Lbs. Approx.

Optional Axles Avail.
 6000/6500+ Lbs. Approx.
 7000/8500+ Lbs. Approx.
 8000/10500+ Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.


Options: Custom Builds are available.

Model VPTR-24

2 Stock Models

VPTR-24 • 24 Ft.

VPTR-1 • 20 Ft.

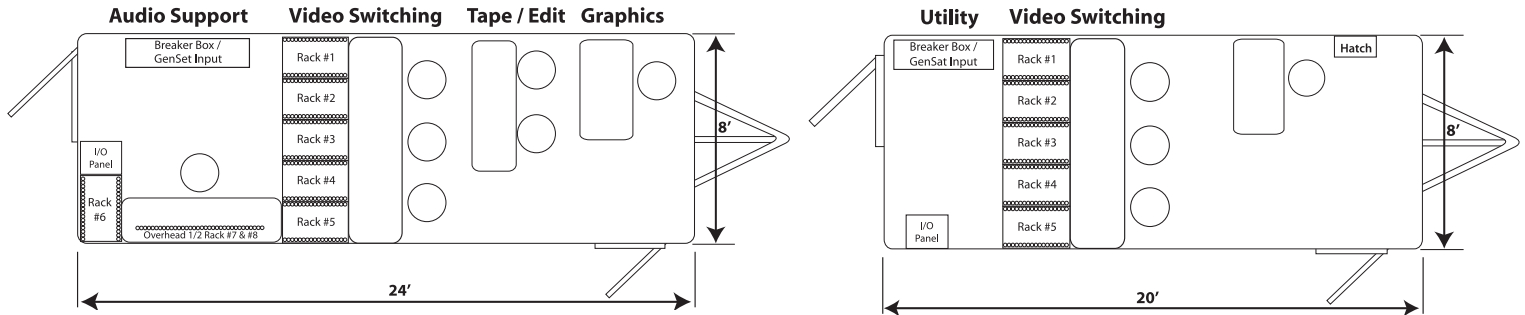

VPTR-1 Specifications

OVERALL LENGTH: 23'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 19'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER: #1: 7RU
#2-4: 13RU
#5: 6RU
MAIN COUNTER TOP SIZE: 8' x 24"

ELECTRICAL CAPACITY AT PANEL:
220/50AMPS Single Phase • 25 Amps per leg

Additional Payload Capacity By Axle Size:
(Standard/Stock x2): 3500/3000 Lbs. Approx.

Optional Axles:
5200/6500 Lbs. Approx.
6000/8000 Lbs. Approx.
7000/10,000 Lbs. Approx.
8000/12,000 Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds & colors are available. Speak to a customer service representatives for more details.

VPTR-24 Specifications

OVERALL LENGTH: 27'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 23'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER:
Forward: #1: 7RU • #2-4: 13RU • #5: 6RU
Aft: #6: 37RU • #7&8: 7RU
MAIN COUNTER TOP SIZE: 8' x 24"
WORK COUNTERS: Forward: 30" x 48" (2x)
Aft: 28" x 36" (1x)

ELECTRICAL CAPACITY AT PANEL:
220/60AMPS Single Phase • 30 AMPS per leg


Additional Payload Capacity By Axle:
(Standard/Stock x2): 5200/4600+ Lbs. Approx.

Optional Axles Avail.
6000/6500+ Lbs. Approx.
7000/8500+ Lbs. Approx.
8000/10500+ Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds are available.

100 AMP SUB PANEL

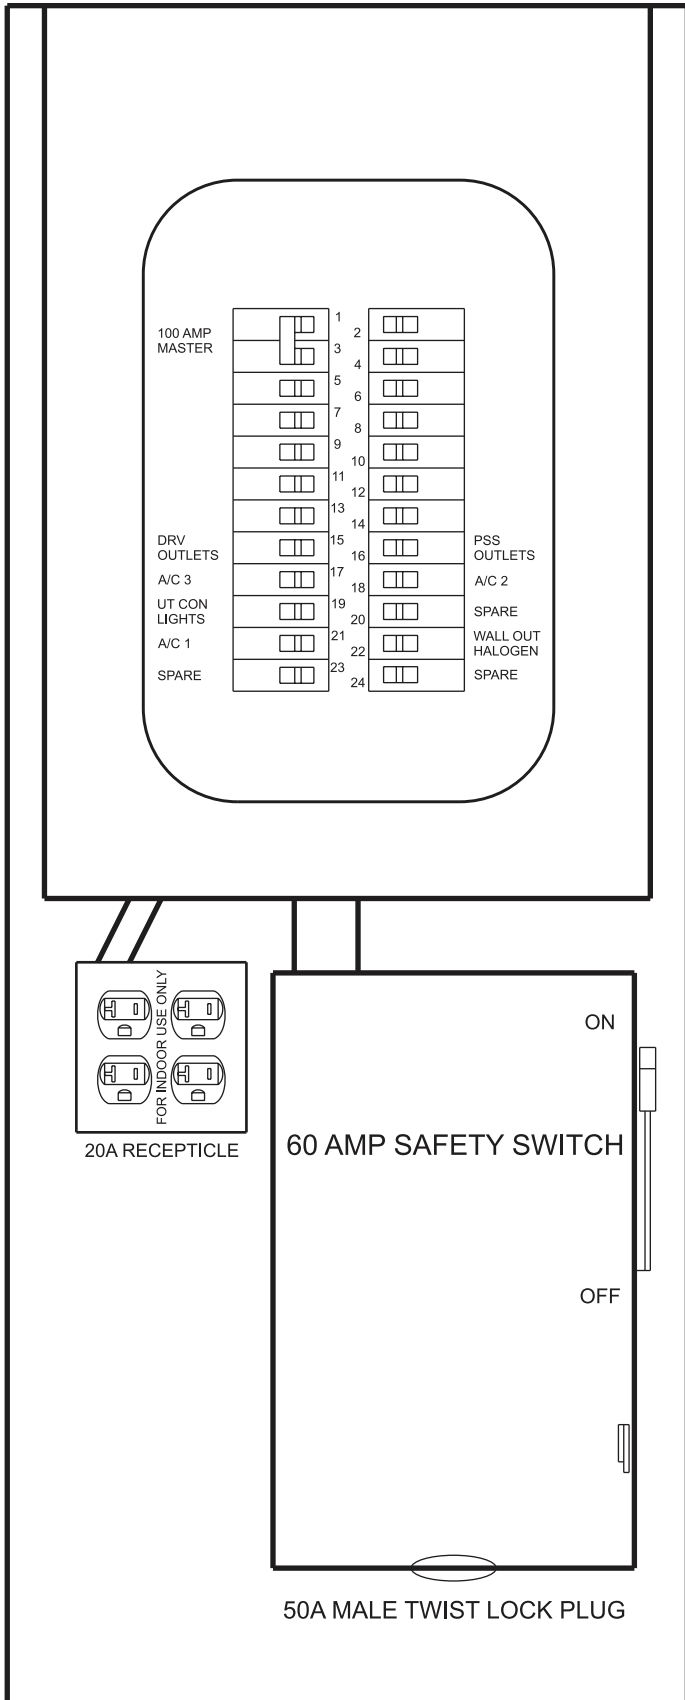

VPTR-1 20 Foot Model Standard Features

- 20 Foot x 8.5 Foot
- Fully Insulated Walls & Ceiling
- White Aluminum Rivetless Exterior (Colors Available)
- Grey Industrial Carpeted Walls & Floors
- Generous 80" Interior Head Room
- 15,000 BTU Roof AC Unit with Heat Strip
- 1 Motorized Roof Vent w/Rain Guard
- 36" Lockable Passenger Door
- Finished Laminate Ceiling w/Lighting
- 40" Lockable Rear Door
- 8 Ft. Console Table
- 4 Ft. Producer's Console Table
- 4 Lockable Cable I/O Hatches
- Dexter Torflex Twin Axles (2x 3500 Lb.)
- Premium Radial Tires & Gray Mods
- 3,000+ Lbs. of Extra Gear Carrying Capacity
- Five 19" Racks (37RU Per Rack)
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Aluminum Pull-Out Steps
- Dual Rear Stabilizers
- Exterior Quartz Light
- Bright Front Corners - ATP Stoneguard
- Observation Deck Available

VPTR-24 24 Foot Model Standard Features

- Dexter Torflex Twin Axles (2x 5,200 Lb.)
- Fully Insulated Walls & Ceiling
- 24 Foot x 8.5 Foot
- Premium Radial Tires & Gray Mods
- White Aluminum Rivetless Exterior (Colors Available)
- 2x 13,500 BTU Roof AC / Heat Strip Units
- Climate Controlled
- 1x 13,500 BTU Equipment Rack AC Unit
- Insulated Walls
- 36" Lockable Passenger Door
- Generous 80" Interior Head Room
- 40" Lockable Rear Door
- 2 Separate Locking Suites
- Six 19" Racks @ 37RU & Two @7RU
- Deluxe 'Control Room' Interior
- Breaker Box w/ Generator Input
- Dual Rear Stabilizer Jacks
- I/O Panel & Cable Hatches
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Tows Easily With any Class 3 Hitch
- Exterior Quartz Light
- Optional Spare Tires Available