

INSTALLATION INSTRUCTIONS

INDIVIDUAL CONTROL SYSTEM

ASP-401

The ASP-401 is a single pole, double throw (SPDT) switch designed for use with any Chief® electric lift.

Unpack and check contents (See Figure 1):

- (1) Cover, aluminum with rocker switch (2) Screw, oval head, 6-32 x 1/2"

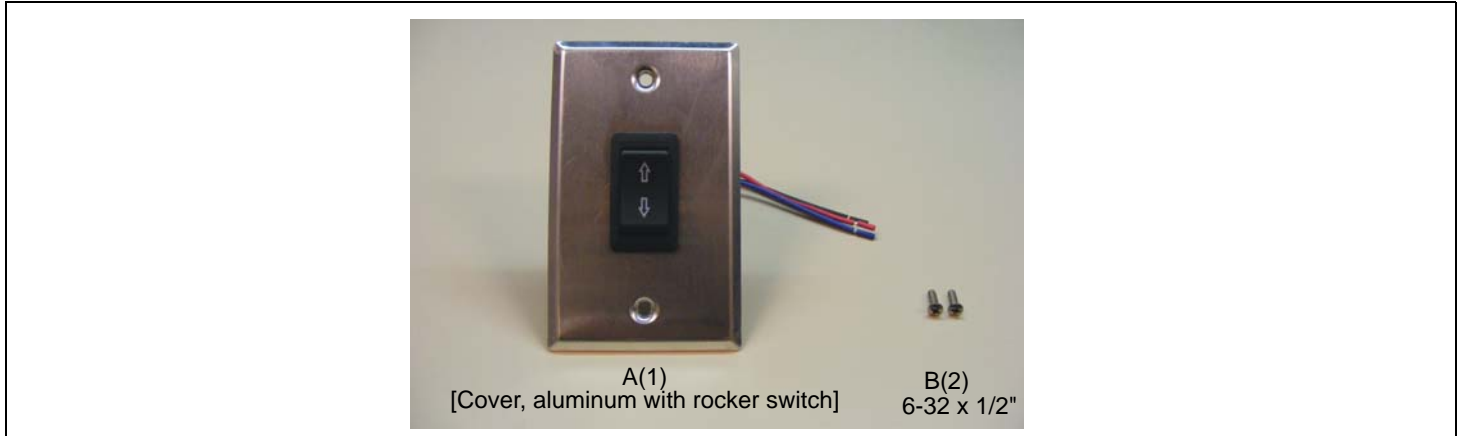


Figure 1: Parts

Installation:



WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!

1. Connect black wire to common (See Figure 2).
2. Connect blue wire to up.
3. Connect red wire to down.
4. Install switch in single gang box with red wire on top and secure using two screws (provided).

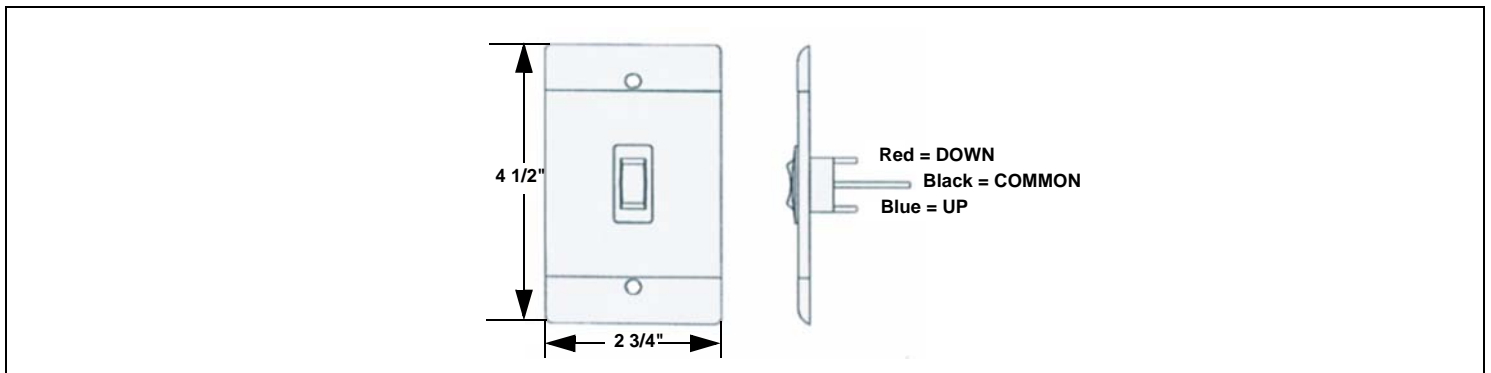


Figure 2: Dimensions and Wiring



Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.