
INSTALLATION INSTRUCTIONS



Elite Speaker Stand

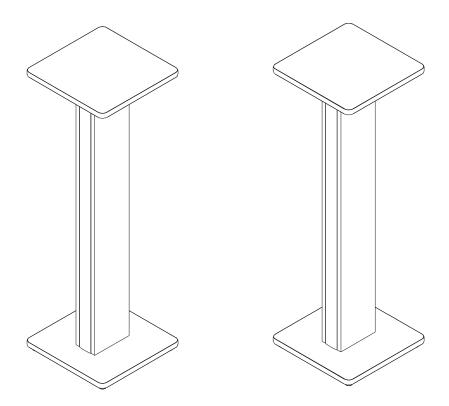

ESS-42

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.




IMPORTANT SAFETY INSTRUCTIONS

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components located on top of each ESS-42 stand does not exceed 25 lbs (11.34 kg). Use with products heavier than the maximum weight indicated may result in instability or collapse of the rack causing possible injury.


--SAVE THESE INSTRUCTIONS--

Installation Instructions ESS-42


LEGEND

	Tighten Fastener	Pencil Mark
G	Apretar elemento de fijación	Marcar con lápiz
	Befestigungsteil festziehen	Stiftmarkierung
	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
	Loosen Fastener	Drill Hole
	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
(Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	Ajustar
	Cacciavite a stella	Regolare
	Kruiskopschroevendraaier	Afstellen
	Tournevis à pointe cruciforme	Ajuster
6	Open-Ended Wrench	Remove
	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Clé à fourche	Retirez
	By Hand	Optional
	A mano	Opcional
	Von Hand	Optional
	Com a mão	Opcional
	A mano	Opzionale
	Met de hand	Optie
	À la main	En option
	Hex-Head Wrench	Security Wrench
	Llave de cabeza hexagonal	Llave de seguridad
	Sechskantschlüssel	Sicherheitsschlüssel
	Chave de cabeça sextavada	Chave de segurança
	Chiave esagonale	Chiave di sicurezza
	Zeskantsleutel	Veiligheidssleutel
	Clé à tête hexagonale	Clé de sécurité


DIMENSIONS

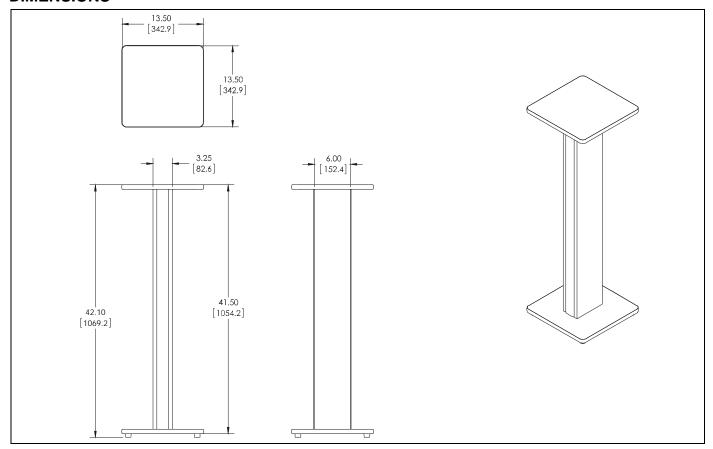

TOOLS REQUIRED FOR INSTALLATION



PARTS

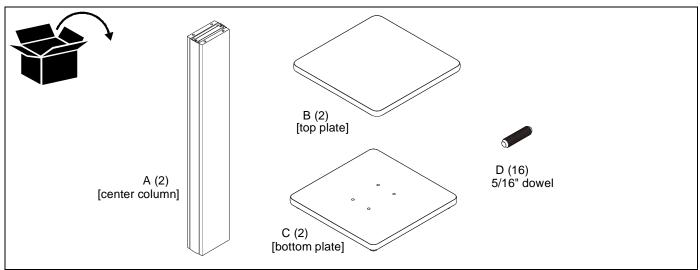

Installation Instructions ESS-42

ASSEMBLY

NOTE: Have a damp rag or cloth on hand to wipe off any excess glue during the following installation steps.

- Fill the four holes on bottom plate (C) about half full of wood glue. (See Figure 1)
- Insert a dowel (D) into each of four holes using a hammer to tap gently until the dowel reaches the bottom of the hole. (See Figure 1)

NOTE: To check if all dowels are fully installed, make sure each one is sticking out the same length from the hole.

3. Use the damp rag or cloth to wipe off any excess glue.

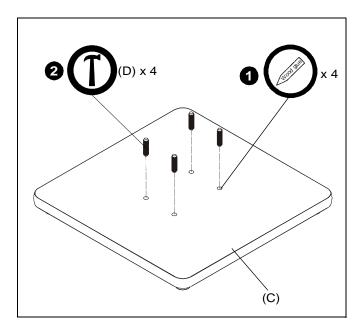


Figure 1

- Fill the four holes on either end of the center column half full of wood glue. (See Figure 2)
- Line up dowels (D) installed on bottom plate (C) with holes on center column (A) and insert dowels into holes. (See Figure 2)
- 6. Use a hammer to gently tap dowels into holes. Place another piece of wood on top of bottom plate to prevent hammer marks. (See Figure 2)
- 7. Use the damp rag or cloth to wipe off any excess glue.

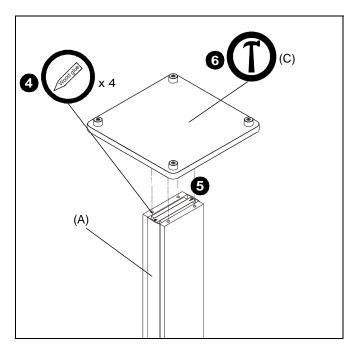


Figure 2

- 8. Fill the four holes on top plate (B) about half full of wood glue. (See Figure 3)
- Insert a dowel (D) into each of four holes using a hammer to tap gently until the dowel reaches the bottom of the hole. (See Figure 3)

NOTE: To check if all dowels are fully installed, make sure each one is sticking out the same length from the hole.

10. Use the damp rag or cloth to wipe off any excess glue.

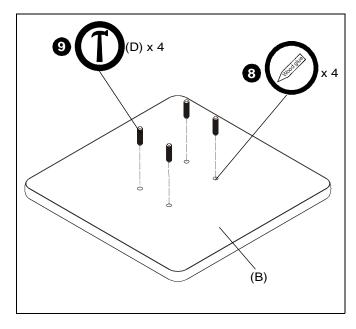


Figure 3

 Fill the four holes on either end of the center column (A) half full of wood glue. (See Figure 4)

- Line up dowels (D) installed on top plate (B) with holes on center column (A) and insert dowels into holes. (See Figure 4)
- Use a hammer to gently tap dowels into holes. Place another piece of wood on top of top plate to prevent hammer marks. (See Figure 4)
- 14. Use the damp rag or cloth to wipe off any excess glue.

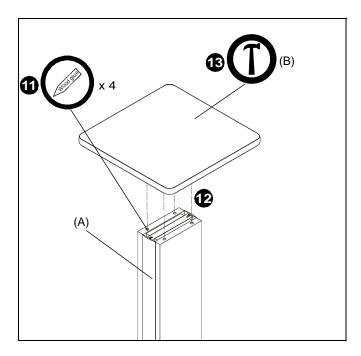


Figure 4

IMPORTANT!: Wait at least one hour for the glue to settle prior to applying any pressure to the unit.

15. Repeat steps for the other speaker stand.

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components located on top of each ERSS stand does not exceed 25 lbs (11.34 kg). Use with products heavier than the maximum weight indicated may result in instability or collapse of the rack causing possible injury.

16. Install speakers to stands.

Installation Instructions ESS-42



Our Mounts. Your Vision.

Chief Manufacturing, a products division of Milestone AV Technologies

8800-002293 Rev00 ©2013 Milestone AV Technologies, a Duchossois Group Company www.chiefmfg.com 01/13 **USA/International**

Europe

A 6436 City West Parkway, Eden Prairie, MN 55344

P 800.582.6480 / 952.225.6000

F 877.894.6918 / 952.894.6918

A Franklinstraat 14, 6003 DK Weert, Netherlands

P +31 (0) 495 580 852

F +31 (0) 495 580 845

Asia Pacific A Office No. 1 on 12

A Office No. 1 on 12/F, Shatin Galleria 18-24 Shan Mei Street

Fotan, Shatin, Hong Kong

P 852 2145 4099

F 852 2145 4477

