

---

# INSTALLATION INSTRUCTIONS

---

## FSB-018

### FLAT SCREEN TABLE STAND

The Flat Screen Table Stand is designed to attach directly to VESA FDMI standard 75mm or 100mm mounting pattern.

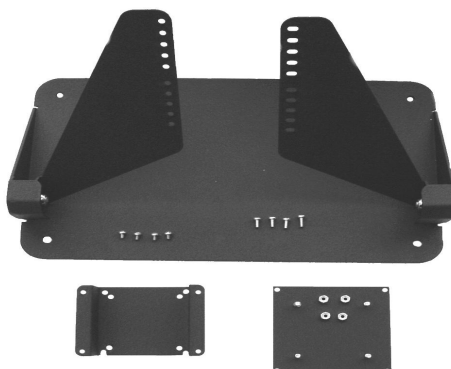


Figure 1

- |                                      |                                   |
|--------------------------------------|-----------------------------------|
| (1) FSB-018 Stand Assembly           | (4) M4 x 10mm Phillips Head Screw |
| (1) 75mm Adapter Bracket             | (4) M4 x 6mm Phillips Head Screw  |
| (1) 100mm Adapter Bracket            | (4) 10-24 Nylock Nut              |
| (4) 10-24 x 3/8" Phillips Head Screw |                                   |

Unpack and check contents: Inspect the Flat Screen Table Stand carefully for shipping damage. If any damage is apparent, call your carrier claims agent.

**CAUTION:** The maximum weight to be installed on the FSB018 is 20 lbs (9 kg). Do not use a power screwdriver to install screws. Use a hand screwdriver to prevent damage to your monitor.

**NOTE:** For 75mm VESA mounting, perform Step 1 first. For 100mm VESA mounting, perform Step 2 and Step 3 first.

#### For 75mm VESA Mounting Pattern

1. Secure the 75mm adapter bracket to your monitor using four M4 x 6mm Phillips head screws (provided) (see Figure 2).

#### For 100mm VESA Mounting Pattern

2. Install 100mm adapter bracket using four provided M4 x 6mm or M4 x 10 Phillips head screws (see Figure 3).
3. Secure the 100mm adapter bracket to the 75mm adapter bracket (see Figure 4).

®Chief is a registered trademark of Milestone AV Technologies. All rights reserved.

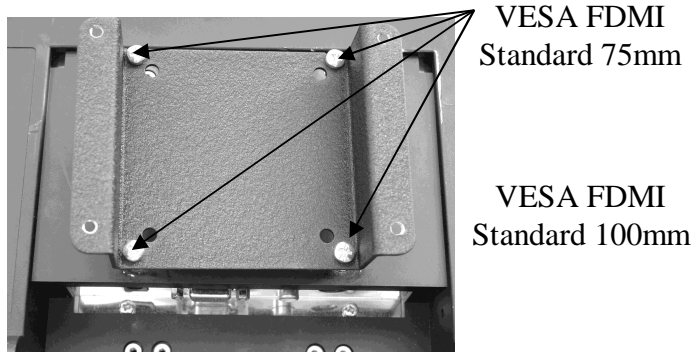


Figure 2. 75mm Bracket Installation

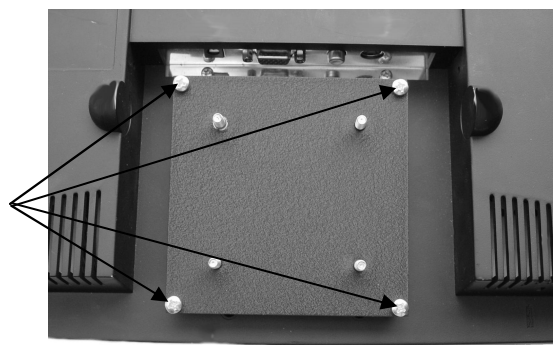


Figure 3. 100mm Bracket Installation

4. At the desired height, secure your monitor to the stand using four provided 10-24 x 3/8" Phillips head screws (see Figure 5).

100mm Adapter Bracket

75mm Adapter Bracket

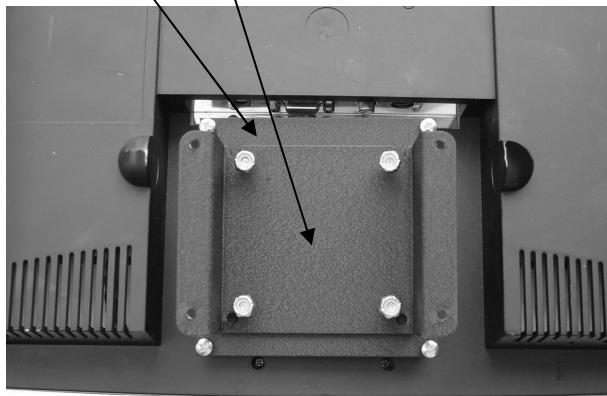


Figure 4. 100mm to 75mm Installation

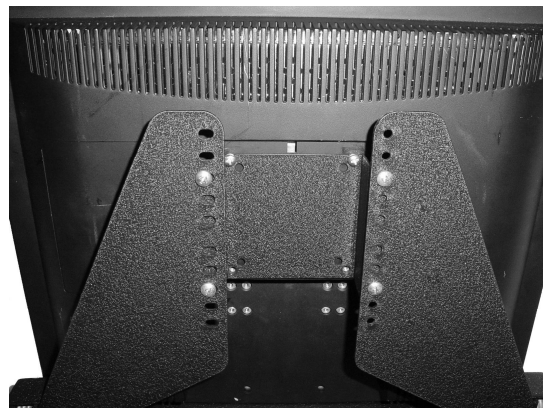


Figure 5. Install Monitor to Stand

