
INSTALLATION INSTRUCTIONS

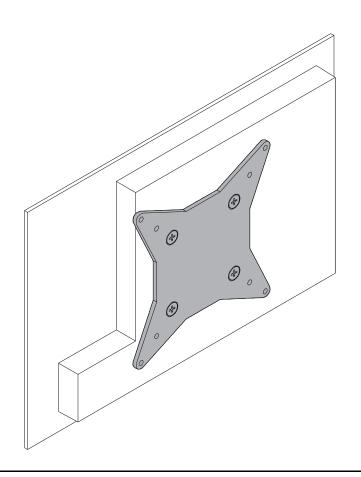

Flat Panel Interface Bracket

FSB-4073 Installation Instructions

DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® and Kontour™ are registered trademarks of Milestone AV Technologies. All rights reserved.



IMPORTANT SAFETY INSTRUCTIONS

WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.

WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.

WARNING: Exceeding the weight capacity can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of all components attached to the FSB-4073 up to (and including) the display does not exceed 40 lbs (13.6 kg) or the weight limit of the mount to which it is attached.



WARNING: Use this mounting system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.




WARNING: Never operate this mounting system if it is damaged. Return the mounting system to a service center for examination and repair.



WARNING: Do not use this product outdoors.


--SAVE THESE INSTRUCTIONS--

DIMENSIONS

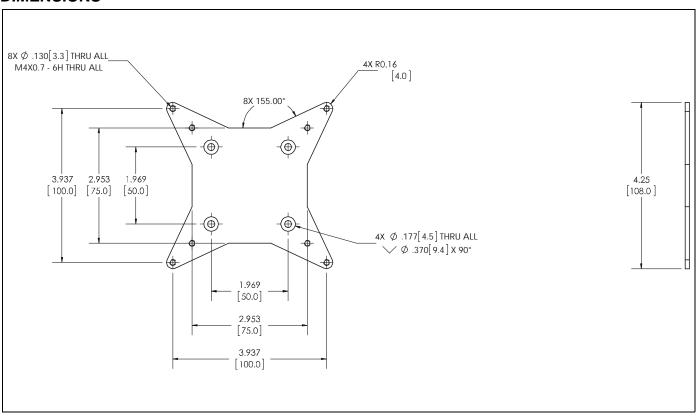

Installation Instructions FSB-4073

TOOLS / PARTS FOR INSTALLATION

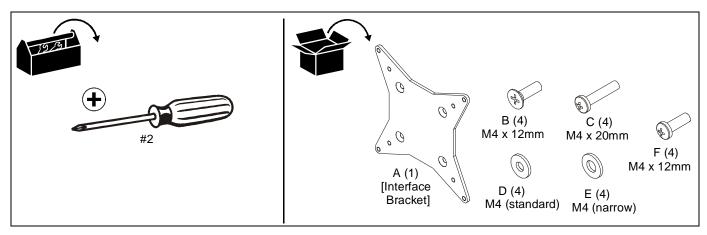

ASSEMBLY AND INSTALLATION

 Use four M4 x 12mm flat head cap screws (B) to secure interface bracket (A) to back of display. (See Figure 1)




Figure 1

 (To FSR/FTR mount) Attach mounting buttons (included with FTR/FSR) to interface bracket (A) using four M4x12mm Phillips pan machine screws (F) and four standard M4 washers (D). (See Figure 2)




Figure 2

IMPORTANT!: A KRA401 weight plate (not included) must be used if attaching FSB4073 to a Kontour[™] mount.

 (To Kontour[™]) Attach Kontour[™] faceplate to interface bracket (A) using four M4x20mm Phillips pan machine screws (C), four narrow M4 washers (E) and KRA401 weight plate (not included). (See Figure 3)

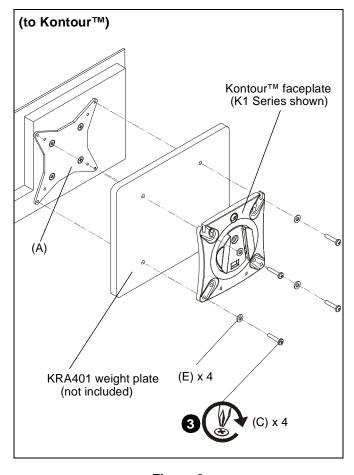


Figure 3

 Complete installation following the installation instructions for the mount to which the FSB4073 is being attached. FSB-4073 Installation Instructions



Chief, a products division of Milestone AV Technologies

8800-002742 Rev00 ©2015 Milestone AV Technologies www.chiefmfg.com 05/15 USA/International A 6436 City West Parkway, Eden Prairie, MN 55344

P 800.582.6480 / 952.225.6000

F 877.894.6918 / 952.894.6918

A Franklinstraat 14, 6003 DK Weert, Netherlands

P +31 (0) 495 580 852

Europe

F +31 (0) 495 580 845

Asia Pacific A Office No. 918 on 9/F, Shatin Galleria

18-24 Shan Mei Street

Fotan, Shatin, Hong Kong

P 852 2145 4099

F 852 2145 4477

