

INSTALLATION INSTRUCTIONS

CABLE LOCK KIT LC-1 & LC-1-12

The cable lock kit is used as a projector accessory. The kit includes a coiled cable that extends to the applicable length, two steel security pads, a 2-gram tube of super glue gel, and a 30mm padlock.

The cable lock kit is supplied in two models numbers:

- **LC-1**
Coiled cable, extends six feet.
- **LC-1-12**
Coiled cable, extends 12 feet.

PARTS

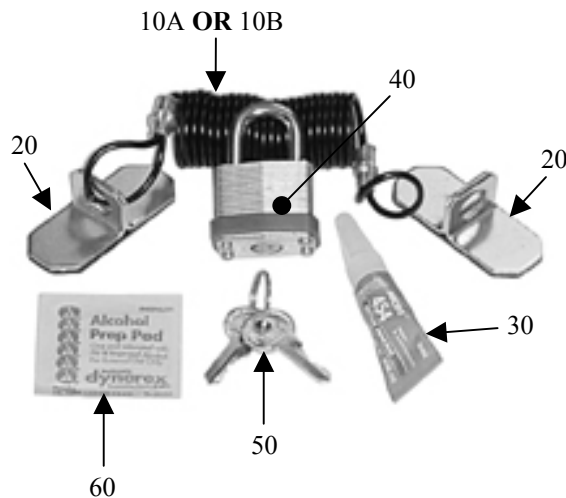


Figure 1. Parts

PARTS LIST

Unpack the shipping carton and check for the contents listed in Table 1 and shown in Figure 1.

Table 1. Parts List

| | | LC-1 | LC-1-12 |
|-----|-------------------------|------|---------|
| REF | DESCRIPTION | QTY | QTY |
| 10A | COILED CABLE, 6 feet | 1 | |
| 10B | COILED CABLE, 12 feet | | 1 |
| 20 | SECURITY PADS, steel | 2 | 2 |
| 30 | SUPER GLUE GEL, 2-grams | 1 | 1 |
| 40 | PADLOCK, 30mm | 1 | 1 |
| 50 | KEY, padlock | 2 | 2 |
| 60 | PREP PAD, Alcohol | 1 | 1 |

INSTALLATION

To install the coiled cable (10A or 10B), do the following:

1. Locate the two flat surfaces where the security pads (20) will be installed.
2. Clean the two flat surfaces using the alcohol prep pad (60).

⚠ WARNING: Before using the super glue gel, read the printed instructions on the tube carefully to avoid personal injury.

3. Apply super glue gel (30) onto the cleaned flat surface where the first security pad (20) will be placed.
4. Place the security pad (20) onto the cleaned surface.
5. Apply pressure onto the pad, as needed.
6. Repeat Steps 3 through 5 to install the second security pad (20).
7. Connect coiled cable (10A or 10B) to security pad (20) using the padlock (40). Retain the keys (50).