<u> Ouick Start Guide</u>

fka-i

PT1200-LS

12" Portable Teleprompter for Light Stand




What's Included

- 1 x AC Power Supply
- 🗌 1 x Magnetic Glass Frame / Monitor Assembly
- 1 x Magnetic Hood
- 1 x PrompterPro Software
- 1 x Monitor




You

What's Included

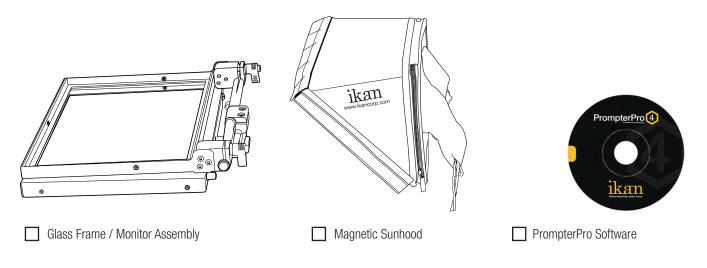

Custom cut foam for hard case

Getting Started

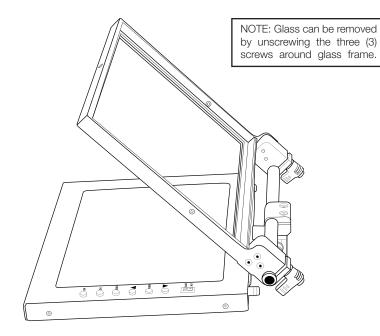


- Tighten & loosen thumb screw to adjust glass frame.
- The ideal angle is 45 Degrees.

You Tube

J

G

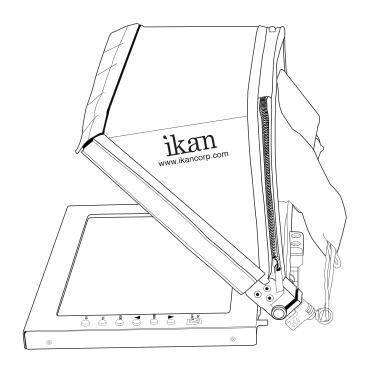

• Attach magnetic hood to glass frame.

• Make sure adjustable thumb screws are tight.

DON'T THROW AWAY THE FOAM INSERT!

• The PT1200 comes packaged in high-quality, custom-cut foam. It is sized perfectly to fit inside an SKB iSeries 1914-8 water-proof case.

0

 $\mathbf{ }$

Specifications

Fixture Specifications	
Aspect Ratio	4:3
Brightness	350 cd/m2
Build Material	Aluminum / Steel
Contrast Ratio	500:1
Diagonal	12 in.
Dimensions	22 x 10.5 x 12 in
Input Signal	Composite BNC, VGA, HDMI
Reading Range	20 ft
Resolution	1024 x 768
Weight	10.5 lbs
Viewing Angle	Horizontal: 160° Vertical: 140°
Shipping Dimensions	7 x 16 x 20 in.
Shipping Weight	18 lbs

You Tube

J

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2018 ikan Corporation. All rights reserved

C f

You

J