




DSF290

TRUSS MOUNT

FOR 12" TRUSS WITH 2" OUTER DIAMETER TUBING



Mount Compatibility for DSF290	SF640
	SF650
	SF660
	ST640
	ST650
	ST660
	SP850
	FPS-1000
	PS-1
	PS-2
	DS-VW765-LAND
	HPF650
DSVW655	

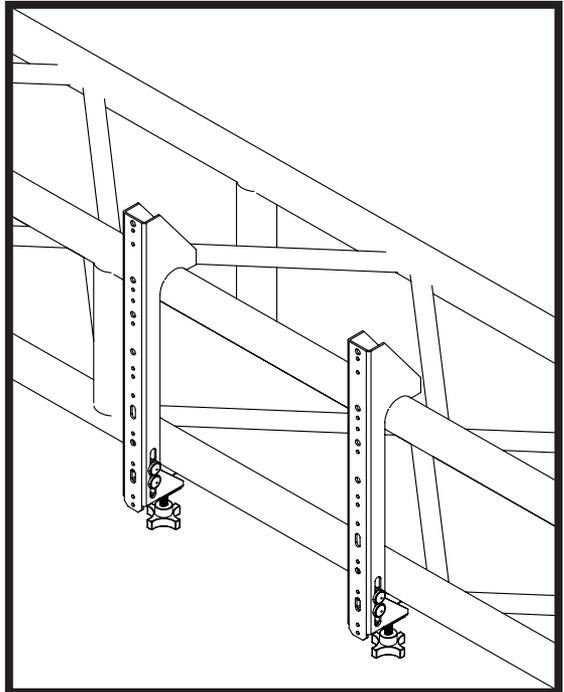


⚠ WARNING

ENG - Before installing make sure the supporting truss will support the combined load of the equipment and hardware. Screws must be tightly secured. Do not overtighten screws or damage can occur and product may fail. Never exceed the Maximum Load Capacity. Always use an assistant or mechanical lifting equipment to safely lift and position equipment. This product is intended for indoor use only. Use of this product outdoors could lead to product failure or personal injury. For support please call customer care at 1-800-865-2112.

Symbols




WARNING



Skip to step.






Screws must get at least three full turns and fit snug.

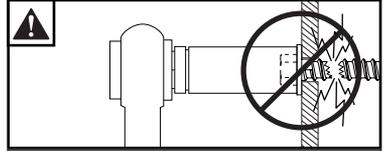

Do not over tighten screws

Tools Needed for Assembly.




Parts List

Part Description	Quantity	Part Number
A hook on adapter bracket	2	202-1532
B 1/4-20 x 1/2" taptite phillips screw	4	520-1592
C knob	2	560-0255
D M8 x 16mm phillips screw	4	520-9257
E M6 x 12mm phillips screw	4	520-1128

Parts (Before beginning, make sure you have all parts shown below)

A (2)

hook on adapter
bracket

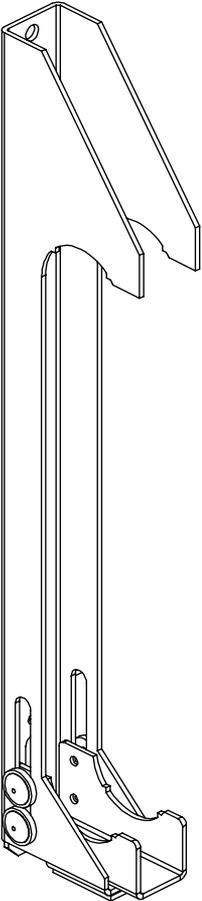

B (4)

taptite phillips
screw




D (4)

M8 x 16mm
phillips
screw



C (2)

knob




E (4)

M6 x 12mm
phillips
screw




Horizontal Truss Configuration Reference

Mount Compatibility for DSF290	a	SF640
		SF650
		SF660
		ST640
		ST650
		ST660
	b	SP850
		FPS-1000
	c	PS-1
		PS-2
	d	DS-VW765-LAND
	e	HPF650
	f	DSVW655

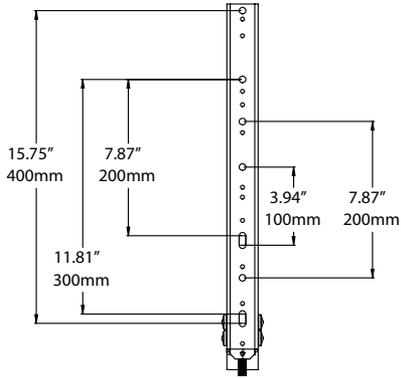


1

DSF290 mount




DSF290 with accessory mount




▲ WARNING

- It is the responsibility of the installer to verify that the truss to which DSF290 is anchored will safely support four times the combined load of all attached components and equipment

2

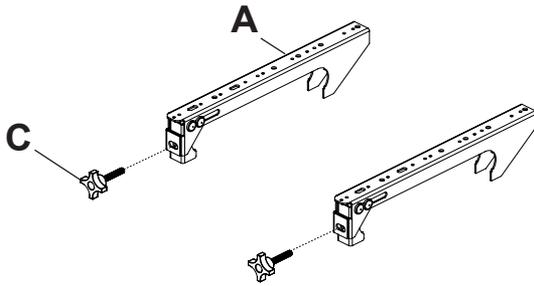


3a-1



Screws must get at least three full turns and fit snug.

Locate appropriate mounting hole positions for specific display VESA pattern and secure using hardware provided as shown.


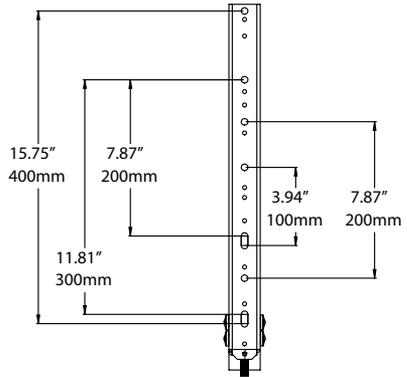


PORTRAIT ORIENTATION FOR HORIZONTAL TRUSS

LANDSCAPE ORIENTATION FOR VERTICAL TRUSS

LANDSCAPE ORIENTATION FOR HORIZONTAL TRUSS



PORTRAIT ORIENTATION FOR VERTICAL TRUSS

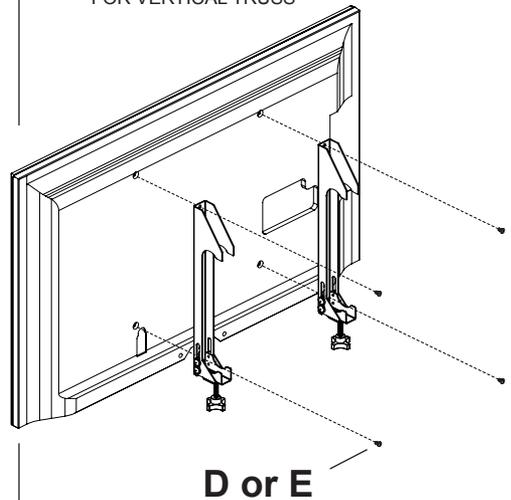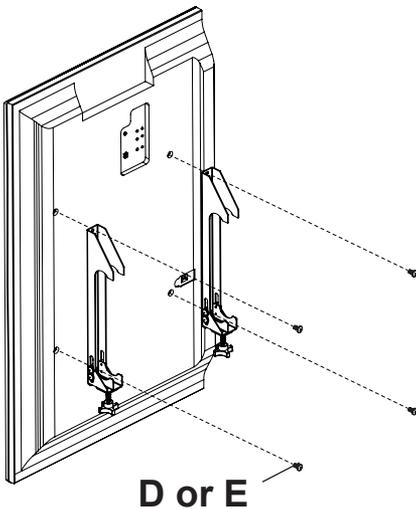



3a-2

Hook the assembly on and secure using the two knobs to clamp onto the truss.

HORIZONTAL TRUSS

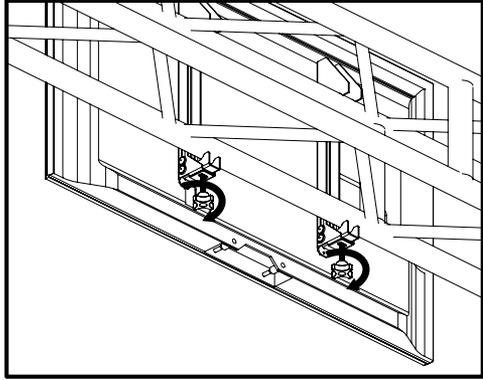


VERTICAL TRUSS

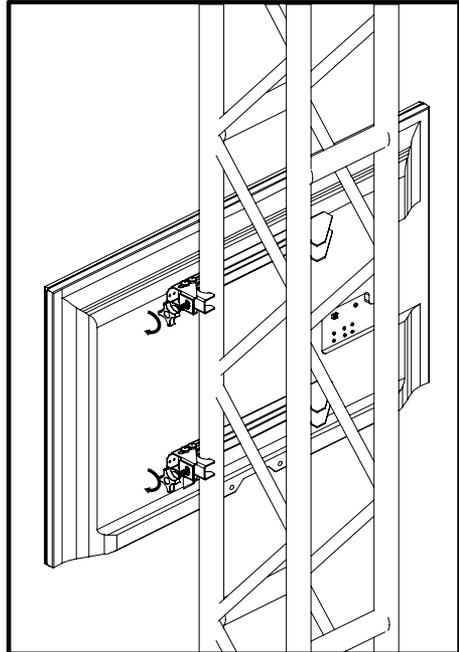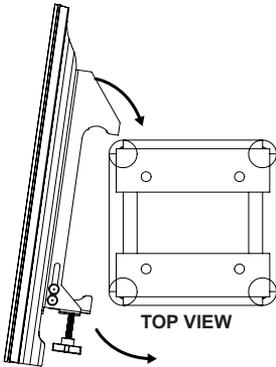

3b-1



Install additional accessory mount using instructions supplied with separate product models.

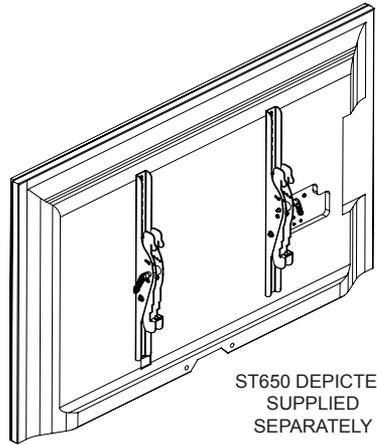

ST650 DEPICTED
SUPPLIED
SEPARATELY

3b-2


Loosely fasten the hook on adapter brackets to the truss so they are secured but can still be repositioned.

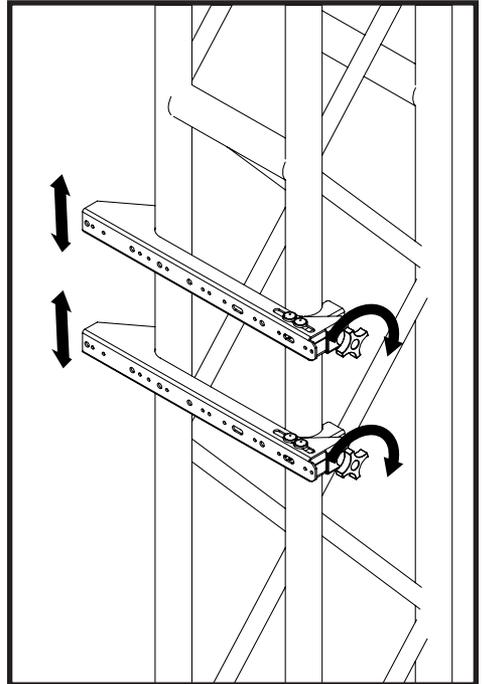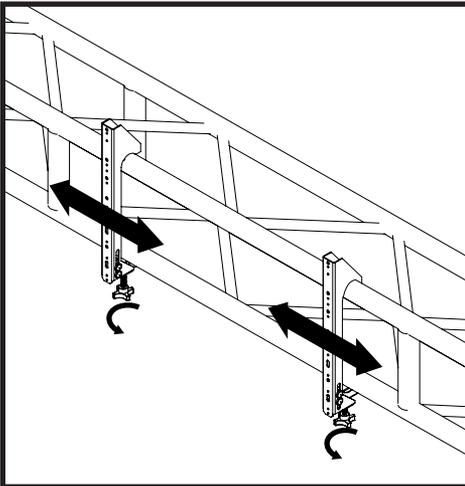


3b-2

Use the outermost compatible hole positions to mount the plate supplied with separate mount and secure using taplite screws provided.


Tighten knobs firmly to secure assembly to truss



VERTICAL TRUSS

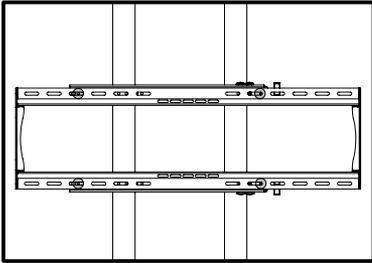


NOTE: ST650 DEPICTED
MOUNTING PLATES MAY VARY SLIGHTLY

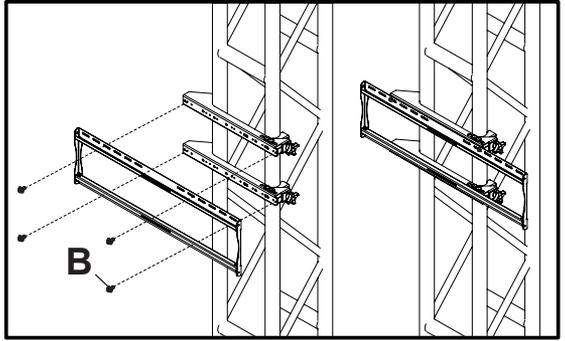


Use the outermost compatible hole positions to mount the plate supplied with separate mount and secure using taplite screws provided.

Tighten knobs firmly to secure assembly to truss

HORIZONTAL TRUSS

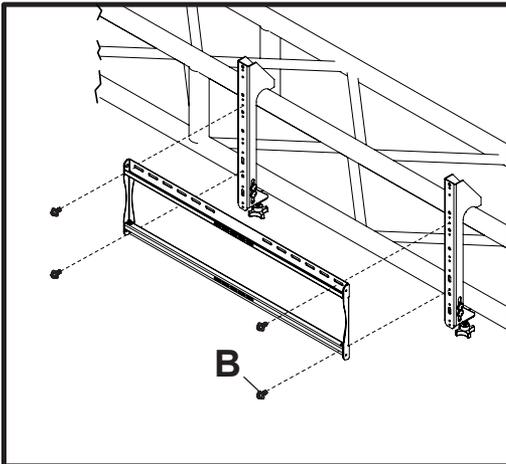

NOTE: ST650 DEPICTED
MOUNTING PLATES MAY VARY SLIGHTLY

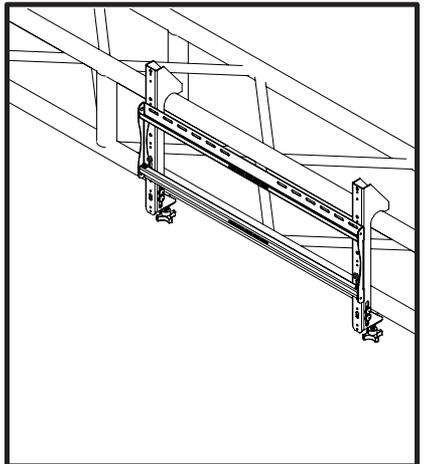

3b-3

Complete assembly using instructions provided with separate mount.

LIMITED FIVE-YEAR WARRANTY

Peerless Industries, Inc. ("Peerless") warrants to original end-users of Peerless® products will be free from defects in material and workmanship, under normal use, for a period of five years from the date of purchase by the original end-user (but in no case longer than six years after the date of the product's manufacture). At its option, Peerless will repair or replace, or refund the purchase price of, any product which fails to conform with this warranty.

In no event shall the duration of any implied warranty of merchantability or fitness for a particular purpose be longer than the period of the applicable express warranty set forth above. Some states do not allow limitations on how long a implied warranty lasts, so the above limitation may not apply to you.

This warranty does not cover damage caused by (a) service or repairs by the customer or a person who is not authorized for such service or repairs by Peerless, (b) the failure to utilize proper packing when returning the product, (c) incorrect installation or the failure to follow Peerless' instructions or warnings when installing, using or storing the product, or (d) misuse or accident, in transit or otherwise, including in cases of third party actions and force majeure.

In no event shall Peerless be liable for incidental or consequential damages or damages arising from the theft of any product, whether or not secured by a security device which may be included with the Peerless® product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty is in lieu of all other warranties, expressed or implied, and is the sole remedy with respect to product defects. No dealer, distributor, installer or other person is authorized to modify or extend this Limited Warranty or impose any obligation on Peerless in connection with the sale of any Peerless® product.

This warranty gives specific legal rights, and you may also have other rights which vary from state to state.

peerless-AV[®]

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
Email: tech@peerlessmounts.com
Ph: (800) 865-2112
Fax: (800) 359-6500
www.peerless-av.com

© 2013, Peerless Industries, Inc.