

# Installation and Assembly - Adapter Bracket for VESA® 300 x 300 Screens



Model: PLP-V3X3

**IMPORTANT!** Read instruction sheet before you start installation and assembly.


*Before you start make sure all parts listed are included with your product.*

## Parts List


Description	Qty.	Part #
<b>AA</b> adapter bracket	1	201-1590
<b>BB</b> M5 x 10 mm socket pin screw	4	520-1063
<b>CC</b> M5 x 16 mm socket pin serrated washer head screw	4	510-1161
<b>DD</b> 4 mm allen wrench	1	560-9646
<b>EE</b> M6 x 12 mm socket pin serrated washer head screw	4	510-1050




**DD**

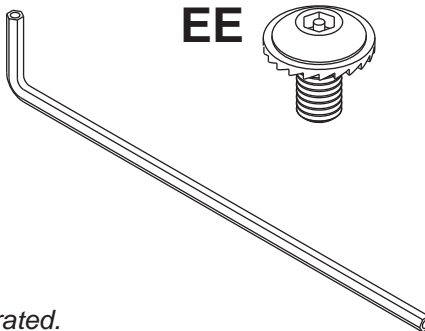

**EE**



**AA**

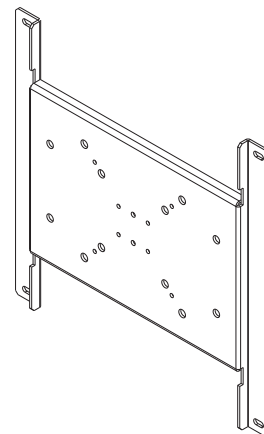

*Some parts may appear slightly different than illustrated.*

## ⚠ WARNING

- Do not overtighten. Overtightening may cause permanent damage to the screen. Torque to 26-35 in • lb (30-40 kg • cm).

- 1 Using 5/32" (4mm) security allen wrench (**DD**), attach adapter plate (**AA**) to screen using four M5 x 16 mm serrated washer head socket pin screws (**CC**) or four M6 x 12 mm serrated washer head socket pin screws (**EE**).

**NOTE:** Screw must make at least three full turns into the mounting hole and fit snug into place. If you have any questions, please call Peerless customer care at **1-800-865-2112**.

