


SES-X-RM1 Rack Mount Panel—SES-X-FA2 Installation



STEP 1

Remove the two screws next to each XLR connector on each transmitter or receiver.

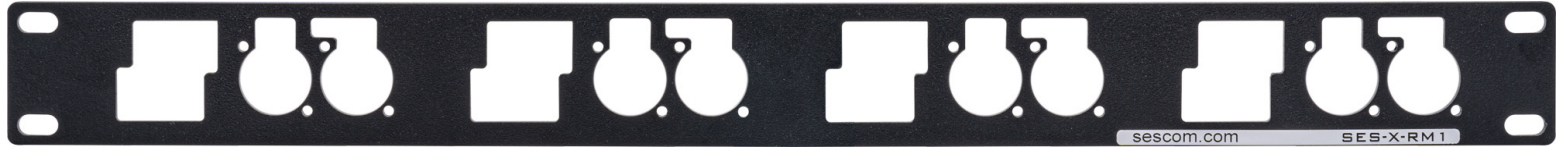

STEP 2

Place the transmitter or the receiver behind the panel so that the screw holes line up.



STEP 3

Place the 1/2 inch screws included with the panel through the panel into the device and tighten each screw.

