

## SES-X-RM3 Rack Mount Panel Installation

Mount 2 SES-X-FA4LXT01 or SES-X-FA2LXBT01 Audio Fiber Transmitters and/or Receivers  
For Front or Back of the Units




### STEP 1

Remove the four screws at the corner of each unit to be installed.



### STEP 2

Place the transmitter or the receiver behind the panel so that the screw holes line up. If you do not plan to use all four spaces, you can attach the included blanks to those spaces.

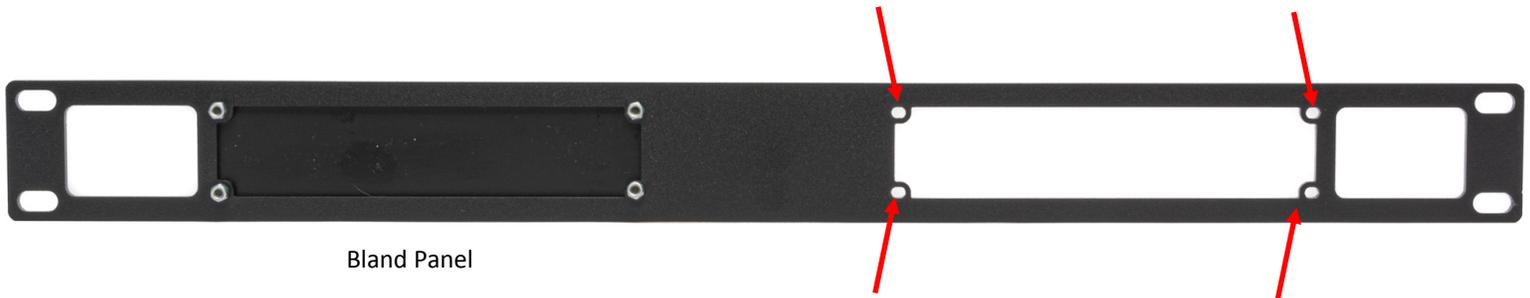

### STEP 3

Place the 1/2 inch screws included with the panel through the panel into the device and tighten each screw.