HDMI AUDIO DE-EMBEDDER w/ Delay

- De-embeds HDMI Audio
- Breakout to 2 channel PCM analog audio
- Break to Coaxial digital audio
- Audio output can be delayed up to 2.7 seconds
- Audio can be delayed with 10 millisecond increments
- Compressed Audio is supported in HDMI and COXIAL output

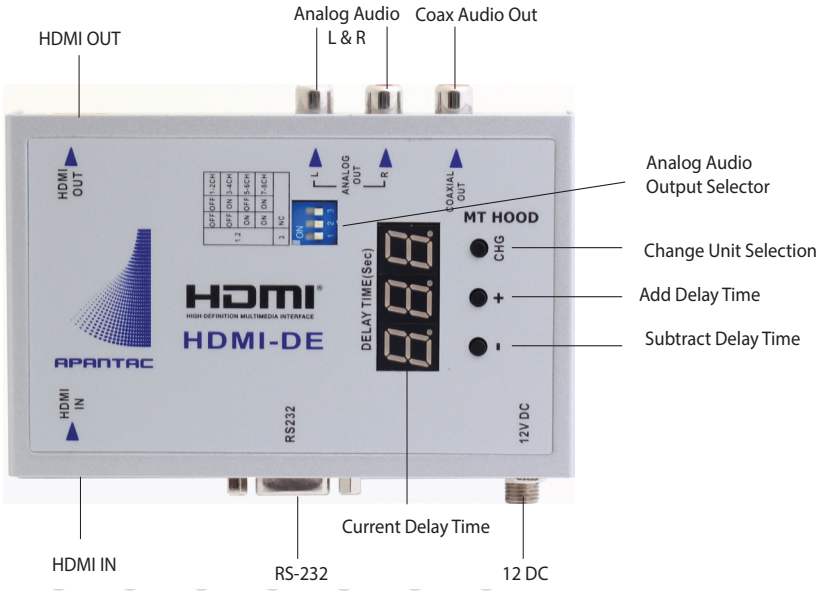

MODEL	HDMI-DE
DESCRIPTION	HDMI Audio De-embedder with Audio Delay
INPUTS	1 x HDMI
OUTPUTS	1 x HDMI
	2 x RCA (analog L&R)
	1 x RCA (Coaxial)
MAXIMUM RESOLUTION	WUXGA or 1080P@60Hz
SUPPORTED AUDIO INPUT SAMPLE RATE	32K/44.1K/48K/96K/192KHz
SUPPORTED AUDIO OUTPUT SAMPLE RATE	32K/44.1K/48K/96K/192KHz
DIMENSIONS	150 mm W x 86 mm D x 25 mm H
WEIGHT	322g
POWER	Locking 12 VDC