




## High Performance Digital Audio Converter

- Model 979R converts Digital PCM to Analog Audio accepting 44.1 to 192KHz sampling rates
- Model 979T converts Analog Audio to Digital PCM outputting 48KHz or optional 96KHz sampling rates

The Models **979R** and **979T** provide seamless digital/analog audio conversion between your system's audio components. Housed in a compact, mountable enclosure, the **979R** converts digital audio to stereo analog signals and the **979T** converts stereo analog signals to PCM audio, offering the perfect solution for interconnecting mismatched audio signals. Used together, the converters form an effective method of transmitting two audio channels where only one coaxial cable is available. Their high bandwidth circuitry and use of premium parts ensure accurate and realistic sonic reproduction for the highest fidelity in audio systems.

### 979R & 979T FEATURES:

- High bandwidth circuitry for accurate, realistic reproduction
- 979R accepts either coaxial or optical PCM inputs
- 979T delivers both coaxial and optical output simultaneously
- Nominal digital audio signal is 0.5 volt at 75 ohms
- Nominal analog level is 1 volt RMS
- Compact-sized, mountable enclosure
- Made proudly in our own US factory

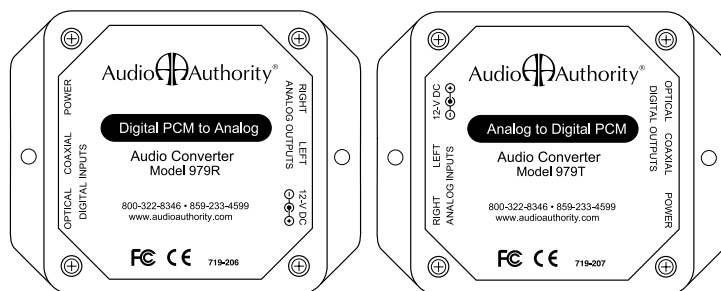

### SPECIFICATIONS:

Model Number:	979R
Analog/Digital:	D to A Converter
Digital Input Type:	Coaxial & Optical
Input Impedance:	75 ohms
Minimum Load Impedance:	10K ohms
Multi-channel:	No (2.0 channel PCM only)
Frequency Response:	44.1 - 192KHz sample rate
Regulatory Approvals:	FCC, CE
DC Input Connector:	5.5 x 2.1 mm
DC Input Voltage/Polarity	12V /Center positive
Max DC Input Current	75mA
Power Supply	571-013
Size (H x W x D):	1.33 x 3.36 x 4.25 inches
Warranty:	1 year replacement

Model Number:	979T
Analog/Digital:	A to D Converter
Digital Output Type:	Coaxial & Optical
Input Impedance:	47.5K ohms
Minimum Load Impedance:	75 ohms
Multi-channel:	No (2.0 channel PCM only)
Frequency Response:	48 - 96KHz sample rate
Regulatory Approvals:	FCC, CE
DC Input Connector:	5.5 x 2.1 mm
DC Input Voltage/Polarity	12V /Center positive
Max DC Input Current	75mA
Power Supply	571-013
Size (H x W x D):	1.33 x 3.36 x 4.25 inches
Warranty:	1 year replacement