

Studiofoam® Pro

Acoustic Absorption Panel



Features:



- ♦ Class A Fire Rated
- ♦ Superior Performance In 1.5" Thickness
- ♦ Easily mounts with Auralex® EZ-Stick Pro™ Tabs, Foamtak™ or Tubetak™ Pro

Studiofoam® Pro is a melamine-free acoustical foam with a Class A fire rating, per ASTM E84. With a slim 1.5" thickness, **Studiofoam Pro** offers all the traditional benefits of **Auralex's** industry leading **Studiofoam®** including durability & affordability while also offering outstanding acoustical performance with an overall NRC of 0.9.

Two sizes, 2' x 2' x 1.5" and 2' x 4' x 1.5", are available in a charcoal finish with beveled edges similar to our elegant **SonoFlat™** or **Pro Panel™** offerings.

Absorption Test Data (Absorption Coefficients):

125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
0.23	0.49	1.11	1.00	0.97	1.01	0.90

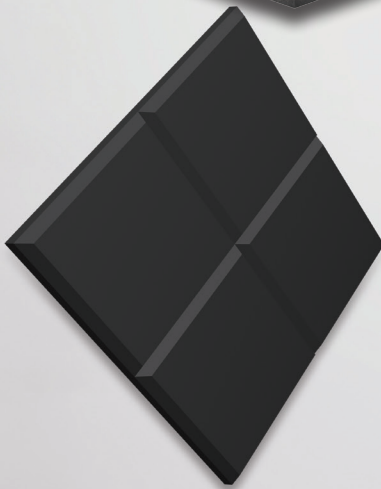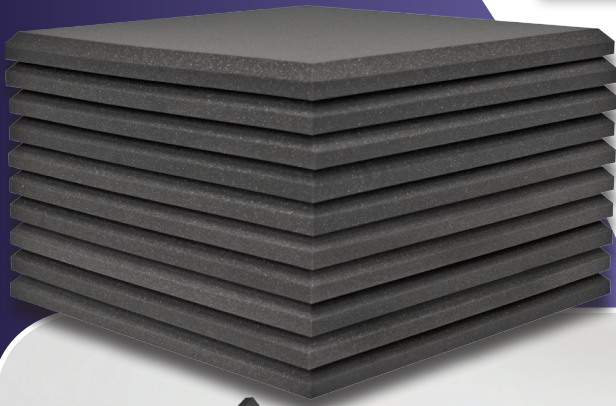

Real-World Acoustics®

1-800-959-3343 / 317-842-2600
9955 Westpoint Drive, Suite 101, Indianapolis IN USA 46256