




## OmniView® Desktop KVM Switches

### Share Single or Dual Monitors, One Keyboard and Mouse With up to Four Computers.

The Belkin Desktop KVM Switch lets you share up to two high-resolution monitors, keyboard, and mouse with up to four computers, saving space on your desk and reducing equipment clutter. The sleek, new design incorporates a built-in USB 2.0 2-port hub\* with one of the ports conveniently located on the front. This is perfect for connecting an MP3 player, printer, scanner, or any of your USB devices to the KVM Switch while allowing your connected computers to access them. Sensitive push buttons on the front allow for easy switching, and independent audio-switching means you can play music from one computer while accessing files from another.

## KEY FEATURES

- **PERFORMANCE:**  
Support for numerous computer brands and multiple operating systems
- **EASY TO INSTALL:**  
Friendly color-coded cables are included with every Desktop KVM Switch
- **USER-FRIENDLY DESIGN:**  
Front-panel buttons with LED indicator lights provide easy-to-access switching between multiple computers
- **EXCELLENT VIDEO QUALITY:**  
Supports large monitors and high-video resolutions
- **ADVANCED SWITCHING CAPABLE:**  
Hot-key switching provides instantaneous access
- **INDEPENDENT AUDIO SWITCHING:**  
Allows the user to switch systems being accessed without switching audio output; great for streaming audio
- **PERIPHERAL SHARING:**  
Share your USB devices among multiple computers (on select models)
- **MULTI-PLATFORM SUPPORT:**  
PS/2 and USB compatibility (on select models)
- **3-YEAR WARRANTY:**  
Belkin's assurance | Quality. Service. Value.

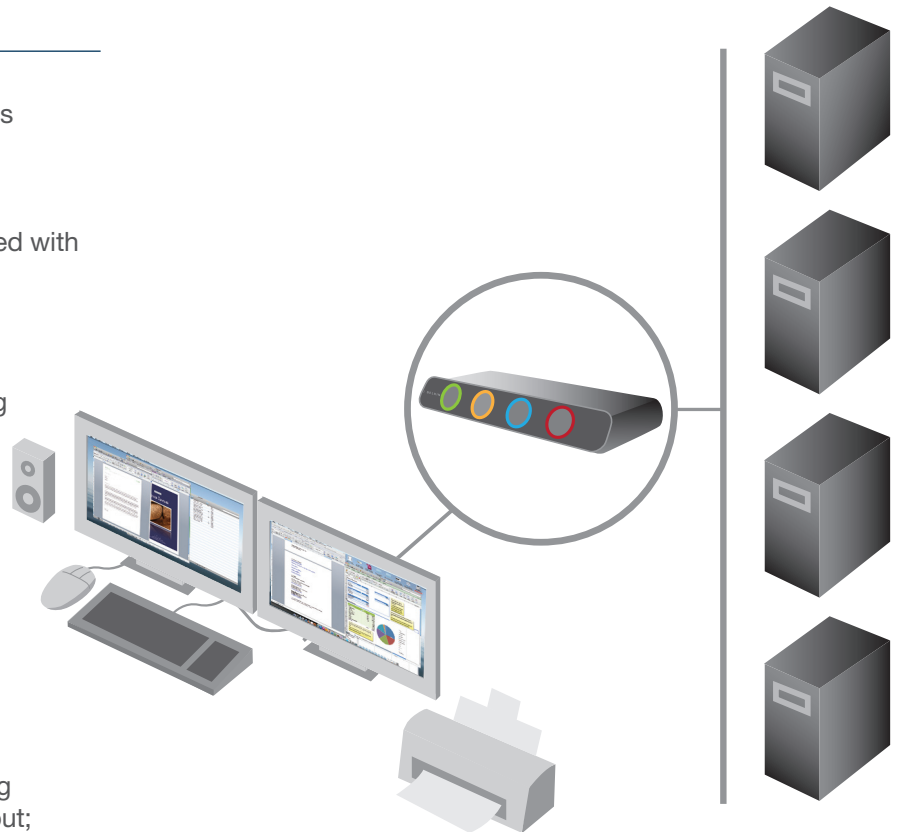

**CABLE KITS ARE INCLUDED**



## OmniView® Desktop KVM Switches

### PRODUCT SPECIFICATIONS

SINGLE-MONITOR CONFIGURATIONS						
Part Number	F1DS102J	F1DS104J	F1DS102L	F1DS104L	F1DD102L	F1DD104L
No. of Monitors Supported	1	1	1	1	1	1
No. of Computers Supported	2	4	2	4	2	4
Video Connection	VGA, SVGA	VGA, SVGA	VGA, SVGA	VGA, SVGA	DVI-D Dual Link	DVI-D Dual Link
Keyboard/Mouse Connection	PS2 & USB	PS2 & USB	USB	USB	USB	USB
USB 2.0 Hub	No	No	Yes	Yes	Yes	Yes
Platform Supported	Mac, PC	Mac, PC	Mac, PC	Mac, PC	Mac, PC	Mac, PC
Computer Connection	USB & PS2	USB & PS2	USB	USB	USB	USB
Audio Input/Output	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack
Microphone Input/Output	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack
Max Resolution	2048x1536@85Hz	2048x1536@85Hz	2048x1536@85Hz	2048x1536@85Hz	2560x1600@85Hz	2560x1600@85Hz
Selector Push Buttons	2	4	2	4	2	4
LED Indicators	2	4	2	4	2	4
KVM Cables Included	2	4	2	4	2	4
Dimensions	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.
Weight	1.48 lbs. (.67kg)	1.50 lbs. (.68kg)	1.48 lbs. (.67kg)	1.50 lbs. (.68kg)	1.48 lbs. (.67kg)	1.50 lbs. (.68kg)
Enclosure	High-impact plastic	High-impact plastic	High-impact plastic	High-impact plastic	High-impact plastic	High-impact plastic
Power/Environment						
Power Type	External	External	External	External	External	External
Power Requirements	12V DC, 1A	12V DC, 1A	12V DC, 1A	12V DC, 1A	12V DC, 1A	12V DC, 1A
Operating Temperature	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
Storage Temperature	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)
Warranty	3yrs	3yrs	3yrs	3yrs	3yrs	3yrs

DUAL-MONITOR CONFIGURATIONS				
Part Number	F1DH102L	F1DH104L	F1DH102D	F1DH104D
No. of Monitors Supported	2	2	2	2
No. of Computers Supported	2	4	2	4
Video Connection	VGA, SVGA	VGA, SVGA	DVI-D Dual Link	DVI-D Dual Link
Keyboard/Mouse Connection	USB	USB	USB	USB
USB 2.0 Hub	Yes	Yes	Yes	Yes
Platform Supported	Mac, PC	Mac, PC	Mac, PC	Mac, PC
Computer Connection	USB	USB	USB	USB
Audio Input/Output	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack
Microphone Input/Output	3.5mm jack	3.5mm jack	3.5mm jack	3.5mm jack
Max Resolution	2048x1536@85Hz/ per monitor	2048x1536@85Hz/ per monitor	2560x1600@85Hz/ per monitor	2560x1600@85Hz/ per monitor
Selector Push Buttons	2	4	2	4
LED Indicators	2	4	2	4
KVM Cables Included	2	4	2	4
Dimensions	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.	12.5 (L) x 5.5 (W) x 5.5 (D) in.
Weight	1.50 lbs. (.68kg)	1.55 lbs. (.70kg)	1.50 lbs. (.68kg)	1.75 lbs. (.79kg)
Enclosure	High-impact plastic	High-impact plastic	High-impact plastic	High-impact plastic
Power/Environment				
Power Type	External	External	External	External
Power Requirements	12V DC, 1A	12V DC, 1A	12V DC, 1A	12V DC, 1A
Operating Temperature	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
Storage Temperature	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)	-20° to 140° F (-20° to 60° C)
Warranty	3yrs	3yrs	3yrs	3yrs

### CERTIFICATIONS

FCC Class B, ICES, C-Tick, RoHS, CE

### SYSTEMS SUPPORTED

- Mac OS® X and above
- Windows® 2000, XP, Windows Vista®, 2003, 7
- DOS
- Linux®
- Novell®

### PACKAGE CONTENTS

- Desktop KVM Switch
- Desktop KVM Cable Kits
- 12V, 1.0A DC Power Supply
- Quick Setup Guide
- User Guide

Note: Specifications are subject to change without notice of respective manufacturers listed.