

# Micro Converter SDI to HDMI



Convert from SDI to HDMI so you can output video from professional SDI video equipment to consumer HDMI televisions, projectors and more! The multi rate 3G-SDI automatically switches between all SD and HD formats up to 1080p60. You also get 3G-SDI loop through, support for Level A and Level B equipment, and power over USB!

\$45

## Connections

#### **SDI Video Inputs**

1 x SD, HD or 3G-SDI.

#### **SDI Video Outputs**

1 x SDI loop out.


#### **HDMI Outputs**

HDMI Type A out.

#### Multi Rate Support

Auto detection of SD or HD.

**Updates, Configurations and Power** Micro USB.

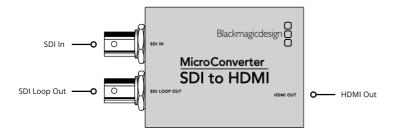

#### Standards

## **SDI Video Standards**

525i59.94 NTSC, 625i50 PAL

## **HD Video Standards**

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94,1080p60 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

#### **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 424M, SMPTE 425M

#### **SDI Video Rates**

SDI video connections are switchable between standard definition, high definition level A and level B 3G-SDI.

#### **SDI Color Precision**

4:2:2

#### **SDI Color Space**

YUV

## **SDI Auto Switching**

Automatically detects SD, HD and 3G-SDI.

#### **HDMI Video Standards**

525i29.97 NTSC, 625i25 PAL 720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080i50, 1080i59.94, 1080i60

#### **HDMI Color Precision**

4:2:2

## **HDMI Color Space**

YUV

## Software

#### **Software Control**

Mac OS X<sup>™</sup> and Windows<sup>™</sup> software upgrade via micro USB.

#### **Internal Software Upgrade**

Via micro USB.

## **Operating Systems**



macOS 10.12 Sierra, macOS High Sierra 10.13 or later.



Windows 8.1 or Windows 10.

## Settings Control

Via software utility.

## Power Requirements

#### **Power Consumption**

1.60 Watts

## **Operational Voltage Range**

4.4V to 5.25V DC

## **Environmental Specifications**

## Operating temperature

0° to 40° C (32° to 104° F)

## Storage temperature

-20° to 60° C (-4° to 140° F)

## **Relative Humidity**

0% to 90% non-condensing

## Physical Specifications



3.01 in 1.80 in oz 5.29 oz
What's Included
Micro Converter SDI to HDMI
Warranty
3 Year Limited Manufacturer's Warranty.
All items on this website are copyright Blackmagic Design Pty. Ltd. 2018, all rights reserved.  All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.  This website uses remarketing services to advertise on third party websites to previous visitors to our site.  You can opt out at any time by changing cookie settings.
Blackmagic Design Authorized Reseller