


FM Wireless

The only digital input transmitter on the market - don't get stuck with expensive optical adapters. The Broadcastvision Entertainment FM Transmitter is the most universal entertainment solution available. With a transmission range of more than 25,000sq/ft, the FM transmitter provides high quality audio transmission for maximum reception. Broadcast audio wirelessly from a TV or any audio source with an audio output jack.

Uses any available radio frequencies in your area 88.1-107.9

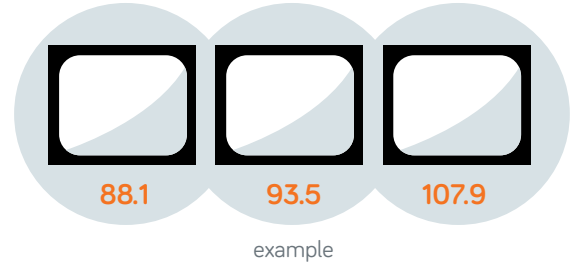

With the FM system from Broadcastvision Entertainment, users listen on their Walkman-style FM radios, FM enabled MP3 players/mobile phones or plug their headphones into our stationary receivers that are mounted on the cardio equipment. Choose between the feature-loaded 10-key receiver or our most popular receiver, the Retro.



AXS-FMTD

FM TRANSMITTER FEATURES

- Includes power supply, audio cables (3.5mm-RCA, digital optical), tune to Sign (w/ vinyl numbers) & mounting bracket.
- Fully selectable through FM-band (88.1 - 107.9)
- Transmission Range 25,000+ Square Feet
- High visibility digital LED interface for maximum ease-of-use
- Option for 100kHz and 200kHz channel spacing selection
- Line Level Stereo Input
- High Fidelity Stereo Audio
- Adjustable Audio Input Modulation Level
- Modulation Level Indicator
- Stereo On/Off Selection
- Telescoping and rotational antenna for maximum application flexibility
- Optional - BNC interface available as extremely flexible remote-antenna feature to satisfy any application
- Audio In: Analog RCA-3.5mm ,Digital Coax & Toslink.
- Power Requirements: 12V, 300mA, 2.1mm Barrel Connector
- Input impedance: 1K
- Level Gain Control: 20 mV to 1V
- Transmission Freq: 88.1-107.9MHz
- Dimensions: 5.5"w x 1.5"h x 4.75"d
- Weight: 10 oz.
- 5-year warranty



AXSFMR
(10 Key)

FM RECEIVER FEATURES

- Includes power supply, audio cables (3.5mm-RCA, digital optical), tune to Sign (w/ vinyl numbers) & mounting bracket.
- Fully selectable through FM-band (88.1 - 107.9)
- Transmission Range 25,000+ Square Feet
- High visibility digital LED interface for maximum ease-of-use
- Option for 100kHz and 200kHz channel spacing selection
- Line Level Stereo Input
- High Fidelity Stereo Audio
- Adjustable Audio Input Modulation Level
- Modulation Level Indicator
- Stereo On/Off Selection
- Telescoping and rotational antenna for maximum application flexibility
- Optional - BNC interface available as extremely flexible remote-antenna feature to satisfy any application
- Audio In: Analog RCA-3.5mm ,Digital Coax & Toslink.
- Power Requirements: 12V, 300mA, 2.1mm Barrel Connector
- Input impedance: 1K
- Level Gain Control: 20 mV to 1V
- Transmission Freq: 88.1-107.9MHz
- Dimensions: 5.5"w x 1.5"h x 4.75"d
- Weight: 10 oz.
- 5-year warranty



AXSFMRT
(Retro)



Transmitter Mounting
Bracket (Included)

Call or email us today for more information:
888.330.4283 (4BVE) Sales@broadcastvision.com



Inputs:

- Digital Optical (cable included)
- Digital COAX
- Analog RCA (cable included)
- Power (cable included)

