


BroaMan Route66

3G/HD/SD-SDI Video Router/Repeater/Converter with OPTOCORE and SANE

Customised Video & Audio Device

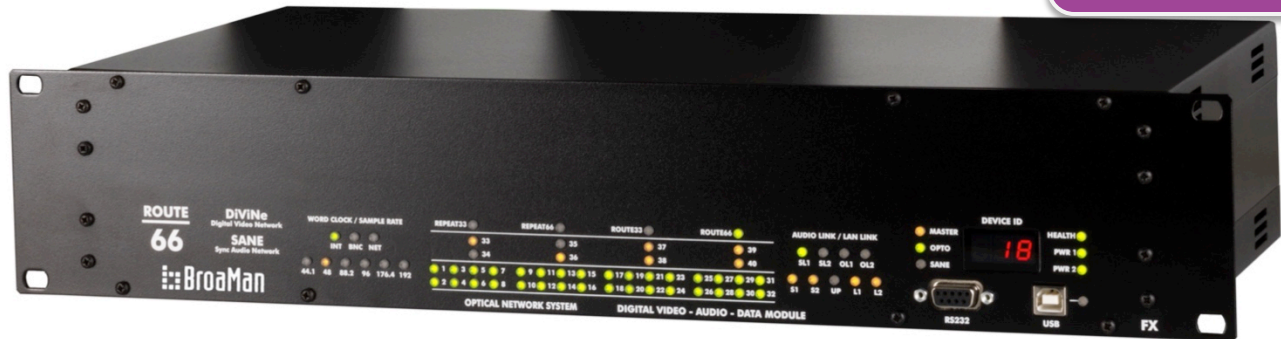

Product Features

- **Capable of routing up to 66 signals**

2RU frame with capacity of:

- 24 SD/HD/3G-SDI ports
- 20 duplex LC fibre ports
- 36 simplex LC fibre ports

- **SD/HD/3G-SDI port options**

- Input with adaptive EQ
- Input with reclocker
- Output
- Output with reclocker
- Switchable I/O
- Genlock

- **Optional CWDM modules**

- **Optocore module**

- 2 x Optocore 2Gbps ports
- 2 x SANE ports
- 2 x LAN ports
- 4 x RS485/422 ports
- Word Clock I/O

- **Modular hardware design**

- **Automated routing or control using a third party controller**

- **Redundant power supplies**

- **LAN, USB and RS232 ports for configuration**

- **Upgradeable internal logic**

- **Comprehensive front panel status indicators**

DIViNe, the Digital Video Network technology developed by BroaMan, provides scalable, protocol independent, routing, repeating, transport and distribution of multiple professional video signals, such as SD/HD/3G-SDI, over optical fibre.

Complete BroaMan systems are built from a collection of modules that include; coaxial and optical I/O, routers, repeaters, and optical multiplexers. Using the modular BroaMan building blocks, any system configuration can be realized.

BroaMan systems are specified and built to provide an application engineered solution, tailored to the requirements of the customer. The modular nature of BroaMan paves the way for construction of fully cost optimized systems.

The cornerstones of BroaMan systems is the Route66. The device is capable of 66 channels of routing, signal repeating, as well as conversion to and from electrical to optical.

Route66 devices can be customized to meet the most sophisticated requirements.

Route66 is protocol independent and can be used to route and repeat signals such as 3G/HD/SD-SDI, MADI, Optocore as well as optical signals from third party converters.

Route66 can be equipped with video clock output modules. The clock outputs are derived from a synchronized video source in the system.

Route66 is equipped with an Optocore FX module. The low latency, synchronous, Optocore network provides the capability of transporting, and patching, up to 1024 audio inputs into thousands of outputs over a redundant network. Additionally, the Optocore FX module includes 64 channel SANE audio ports on Cat5, 4 RS485/422 ports, 100Mbit Ethernet switch and a Word Clock input and output.


Route66 devices can be configured as switched or automatic Optocore routers, providing the capability to build Optocore networks in star topology or as a mixture of ring- and star topology.

Route66 is populated with routers, I/O and multiplexers at the time of manufacturing, according to customer's specifications.

Route 66 can be controlled by an external controller or by using automated routing, according to customer's specifications.

Route66 is equipped with a built-in redundant power supply with an automatic switchover.

Line Drawings

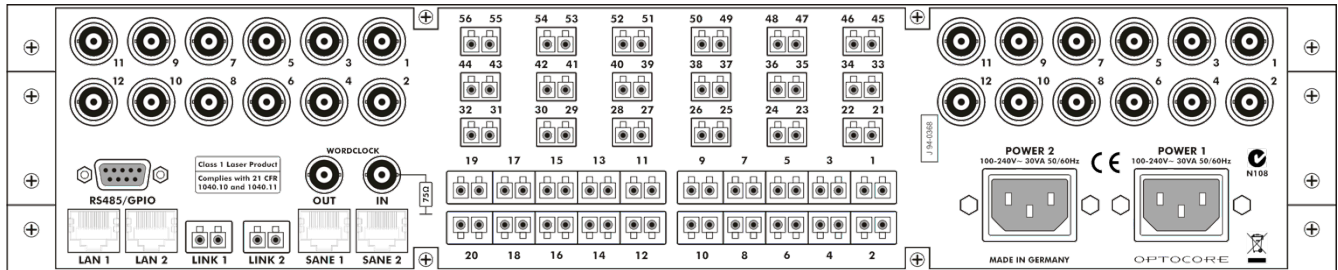

Technical Specifications

Video	
Standards	SD, ED, HD, Dual Link, 3G
Complies with SMPTE	259M, 292M, 344M, 372M, 424M
Interface	SDI – Serial Digital Interface

Optical Connection	Complies with 21 CFR 1040.10 and 1040.11
--------------------	--

SANE, LAN		Convention	
Audio	TIA - 568A/B, Optocore		200 Mbit/s
LAN	TIA - 568A/B, IEEE - 802.3		10/100 Mbit/s

Word Clock		Hardware standard BNC - 75 Ω	
Data rate	Depending on selected sample rate		Up to 192 kHz
Impedance	Output		Output ≤ 5 Ω
	Input		Input 75 Ω
Drive level	Output		≥ 1 V _{pp}
Zero level	Referring to GND		+ 1.7 V
Sense level	Input		≥ 400 mV _{pp}

Remote Control		Convention	
RS232	EIA / TIA – 232		57 600 Baud
USB	USB 2.0 – Device		12 Mbit/s
LAN	IEEE – 802.3		10/100 Mbit/s

Power Supply	
Type	Switch-mode, universal input
Mains voltage	100... 240 V
Frequency	50 60 Hz
Power consumption	Depending on the configuration of the device, 32VA - Max
Security classification	Class 1: basic insulation, connected to the protective grounding conductor
Security regulations	Harmonised European standard EN60065
Mains connector	acc. to IEC-950
Cooling	Passive, via surface and ventilation openings on both sides of the device

BroaMan – Broadcast Manufacturer GmbH

Lohenstr. 8, 82166 München-Gräfelfing, Germany
 Phone +49 (0)89-89 99 64 – 60, Fax +49 (0)89-89 99 64 - 79
inquiry@broaman.com, www.broaman.com