


Size  $\downarrow$   
M11  
 Pitch  
 0.75



**SPECIFICATION**

: AC500V  
 DIELECTRIC STRENGTH: 500V AC FOR ONE MINUTE.  
 : 50m $\Omega$   
 CONTACT RESISTANCE: 50m $\Omega$  MAX  
 : DC100Vにて100M $\Omega$ 以上  
 INSULATION RESISTANCE: 100M $\Omega$  MIN. AT 500V DC.

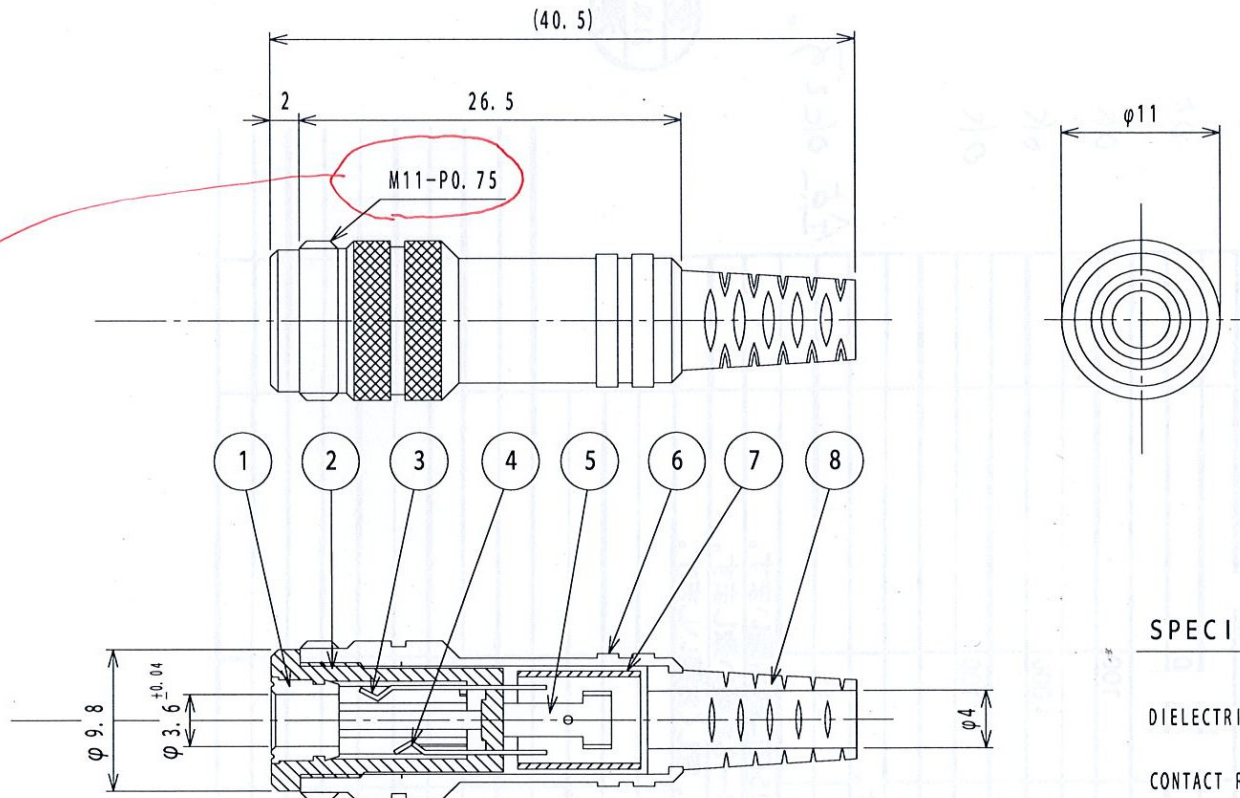

8	PROTECTOR	PVC	1		TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	INSULATOR	PVC	1		$\pm 0.3$	2/1	15/12/25				
6	CAP	BSBM	1	Ni							
5	SLEEVE TERMINAL	BSR t=0.3	1	Ni	MODEL		QTY	PART NAME	3-CON. MINIATURE JACK		
4	TIP CONTACT	PBS t=0.25	1	Ni				30-297J	No.		
3	RING CONTACT	PBS t=0.25	1	Ni	MATERIAL			DRAW. NO			
2	BODY	PA	1								
1	SLEEVE METAL	BSBM	1	Ni	FINISH						
LET	PART NAME	MATERIAL	QTY	FINISH	<b>CALRAD 30-297J</b>						