

Wall Mount and Patch Enclosure

Large, empty w/solid metal door, optional lock/key




Cleerline SSF™ wall mount fiber distribution units are designed to support patching and splicing in one unit. The enclosure has 8 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a single outer door with optional key lock.



FEATURES AND BENEFITS

- Accommodates up to 8 adapter plates
- Cable entry tie down points
- Single door with optional key lock available
- Top or bottom cable entry
- LGX® compatible adapter plates

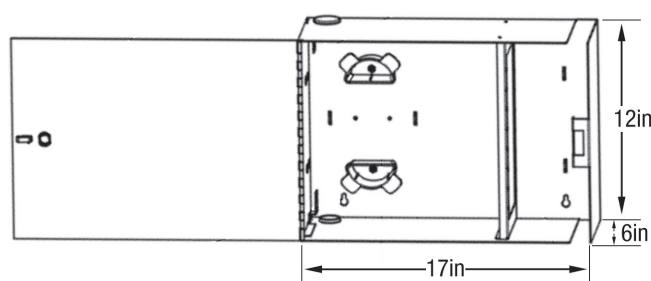

SPECIFICATIONS

| | |
|-----------------|------------------------------------|
| Adapter Plates | 8 |
| Splice Trays | 4 |
| Dimensions | 17"Hx12"Wx6"D |
| Packaging | 20"Hx16"Wx11"D |
| Weight | 16 lbs empty/20 lbs typical loaded |
| Material | 18 GA Steel, Black powder coat |
| Compatible with | SSF™ adapter plates |

PART NUMBERS

| | |
|---------------------|---|
| SSF-LWM-SOLID-NL-E8 | Large, empty with solid metal door, no lock |
| SSF-LWM-SOLID-WL-E8 | Large, empty with solid metal door, with one lock/key |