

Wall Mount and Patch Enclosure

Medium, empty w/solid metal door, optional lock




Cleerline SSF™ wall mount fiber distribution units are designed to support patching and splicing in one unit. The enclosure has 4 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a single outer door with optional key lock.



FEATURES AND BENEFITS

- Accommodates up to 4 fiber plates
- Cable entry tie down points
- Single door with optional key lock available
- Top or bottom cable entry
- LGX® compatible adapter plates

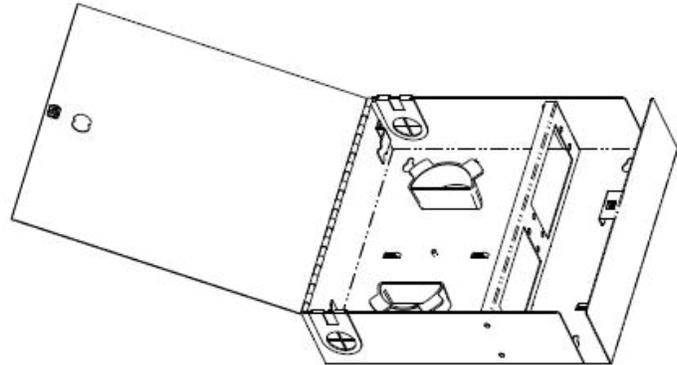

SPECIFICATIONS

Adapter Plates	4
Splice Trays	4
Dimensions	11.5" H x 13" W x 3.5" D
Packaging	12" H x 14" W x 4" D
Weight	8 lbs empty/11 lbs typical loaded
Material	18 GA Steel, Black powder coat
Compatible with	SSF™ adapter plates

PART NUMBERS

SSF-MWM-SOLID-NL-E4	Medium, empty with solid metal door, no lock
SSF-MWM-SOLID-WL-E4	Medium, empty with solid metal door, with one lock/key