

Dual Motor Low Voltage Control (DMC)




SPECIFICATION DATA

SUGGESTED SPECIFICATIONS: Electrical rating 115 VAC 60 Hz 10A. The dual motor LVC is used to operate the Da-Lite Dual Masking Electrol® Screen or a single motor screen and a projector lift together from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary dry contact switch. Connections, including 115 volt input, switch input and motor output, to control board provided by screw terminal blocks. Any combination of single or multiple 3-button switches, optional radio frequency remote or infrared remote, or a control panel with momentary dry contacts may control unit. Control board to be mounted in a steel housing measuring 4" H x 6" W x 8" L. Standard knockouts provided on housing for conduit connections. Control to be listed by Underwriter's Laboratories.



WIRING - 120V AC 60HZ

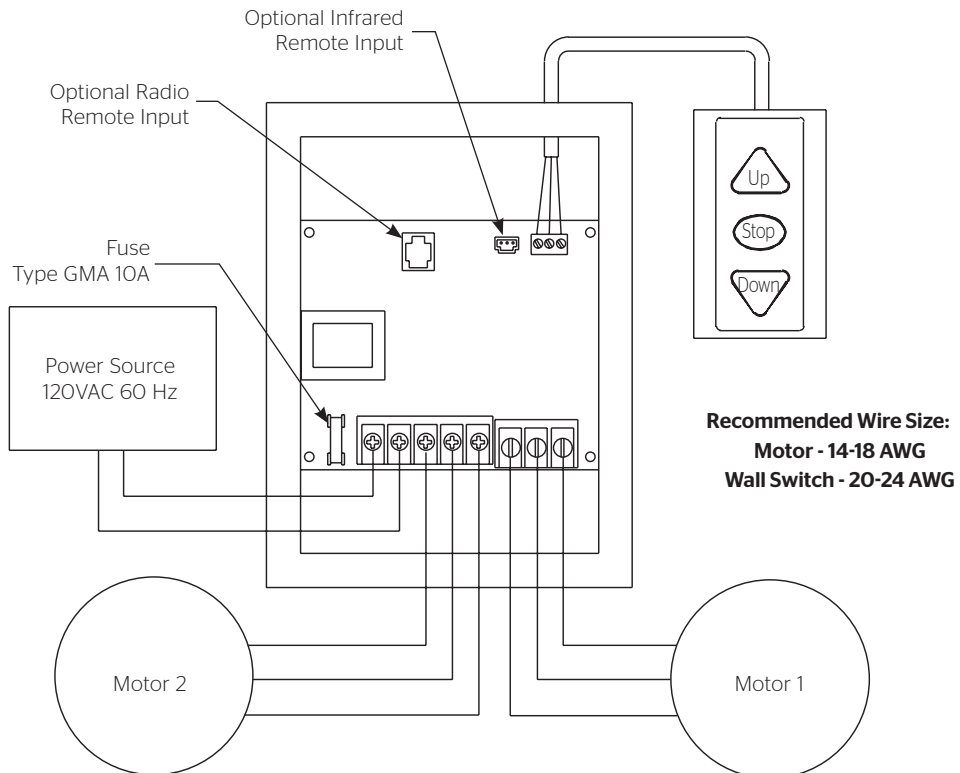

PRODUCT NOTES

- **NOTE:** Do not seal in - allow access.
- Specifications subject to change without notice.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS:

1. Select optional accessories:
 - Radio Frequency Remote Control
 - Radio Frequency Range Extender available
 - Infrared Remote Control
 - Additional 3-button Wall Switch
 - 220V Model Available
 - Key Locking Cover Plate for 120 V Switch or LVC



A BRAND OF MILESTONE AV TECHNOLOGIES

www.milestone.com

P 800.622.3737 / 574.267.8101

F 877.325.4832 / 574.267.7804

E info@da-lite.com

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2018 Milestone AV Technologies. DL-0359 (Rev. 1) 02.18.
Da-Lite is a registered trademarks of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

Project Name: _____
Architect: _____
Contractor: _____ Phone: _____
Reseller: _____ Phone: _____