

# d:screet™ SC4098 Supercardioid Microphone

For podium/table/hanging/floor stand applications



## Key features

- Outstanding audio quality – clarity of voice
- Highly directional – very isolated
- High rejection of radio frequency interference
- Sturdy and sleek Scandinavian design
- Wireless capability
- Rejection of handling noise

## Configurations

The d:screet™ SC4098 Supercardioid Microphone is available in many variants.

Color: black or white

Connector: XLR or MicroDot

The MicroDot connector can be used with a wireless adapter to connect with a professional wireless system. Choose from our extensive range of adapters to find the right fit. The DAD600I adapter connects the MicroDot connector to an XLR connector.

Specifications

Directional pattern

Supercardioid

Principle of operation

Pressure gradient

Cartridge type

Pre-polarized condenser

Frequency range

20 Hz - 20 kHz

Frequency range, ±2 dB, 20 cm (8 in) distance

80 Hz – 15 kHz with 3 dB soft boost at 8-15 kHz)

Sensitivity, nominal, ±3 dB at 1 kHz

16 mV/Pa; -36 dB re. 1 V/Pa

Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20 µPa (max. 26 dB(A))

Equivalent noise level, ITU-R BS.468-4

Typ. 35 dB

S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL)

Typ. 71 dB(A)

Total harmonic distortion (THD)

< 1% up to 125 dB SPL peak

Dynamic range

Typ. 102 dB

Max. SPL, peak before clipping

135 dB

Output impedance

From MicroDot: 30 - 40 Ω. From DAD6001 adapter or XLR variant: 100 Ω

Cable drive capability

Up to 300 m (984 ft) with DAD6001 adapter or XLR variant

Output balance principle

Signal balanced with DAD6001 XLR Adapter or XLR variant

Common mode rejection ratio (CMRR)

>60 dB from 50 Hz to 15 kHz with DAD6001 XLR Adapter or XLR variant

Power supply (for full performance)

Min. 5 V to max. 50 V through DPA adapter for wireless systems.

48 V phantom power ±4 V with DPA XLR adapter or XLR variant

Current consumption

Typ. 1.5 mA (microphone). 3.5 mA with DAD6001 XLR adapter or XLR variant

Polarity

+V at MicroDot pin for positive sound pressure


(and pin 2 on DAD6001 XLR Adapter or XLR variant)

Temperature range


-40°C to 45°C (-40°F to 113°F)

Relative humidity (RH)

Up to 90%

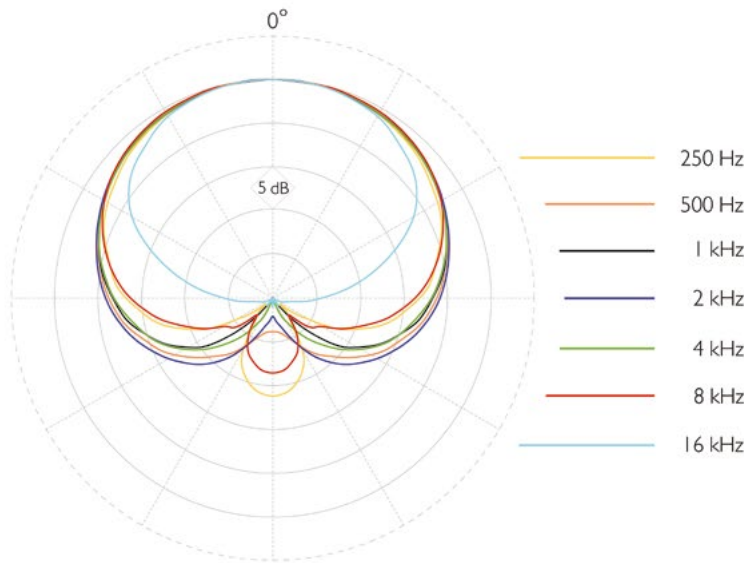


Typical directional characteristics of a d:screet™ SC4098 Supercardioid Microphone

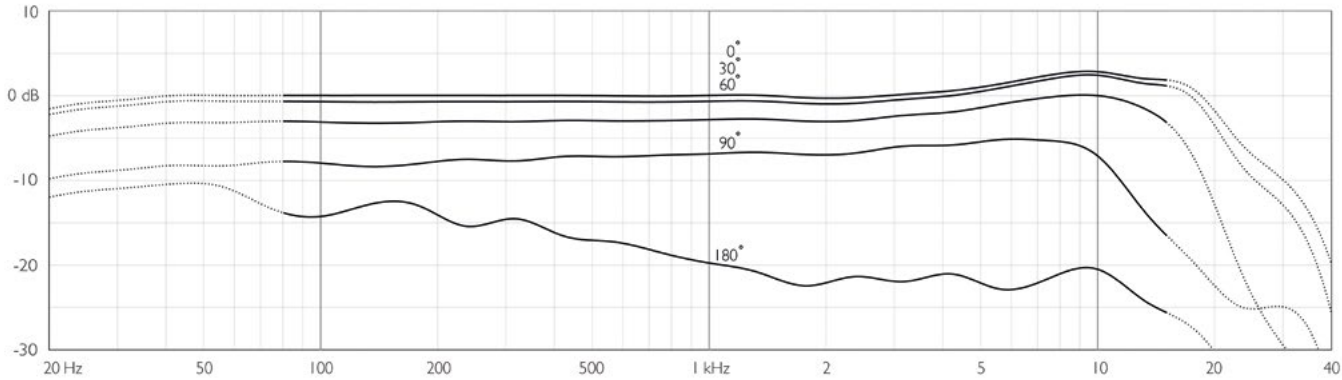


Typical on- and off-axis response of a d:screet™ SC4098 Supercardioid Microphone measured at 20 cm (8 in)

Coverage area

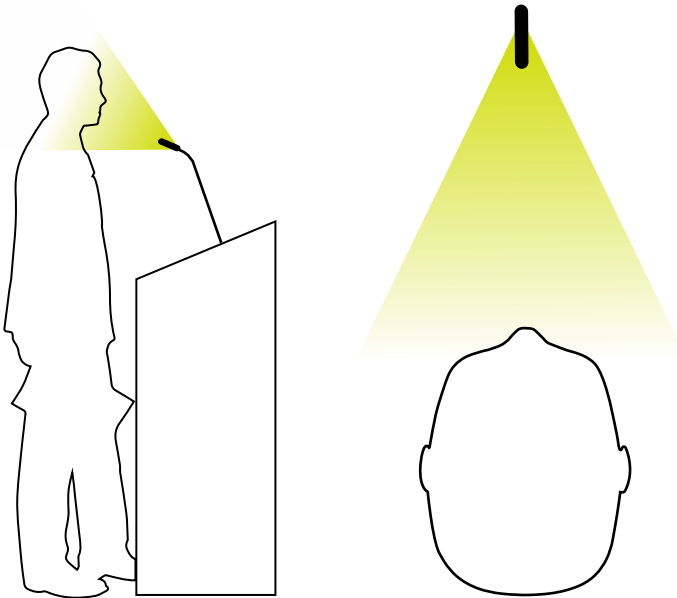

Dimensions drawing (in mm)

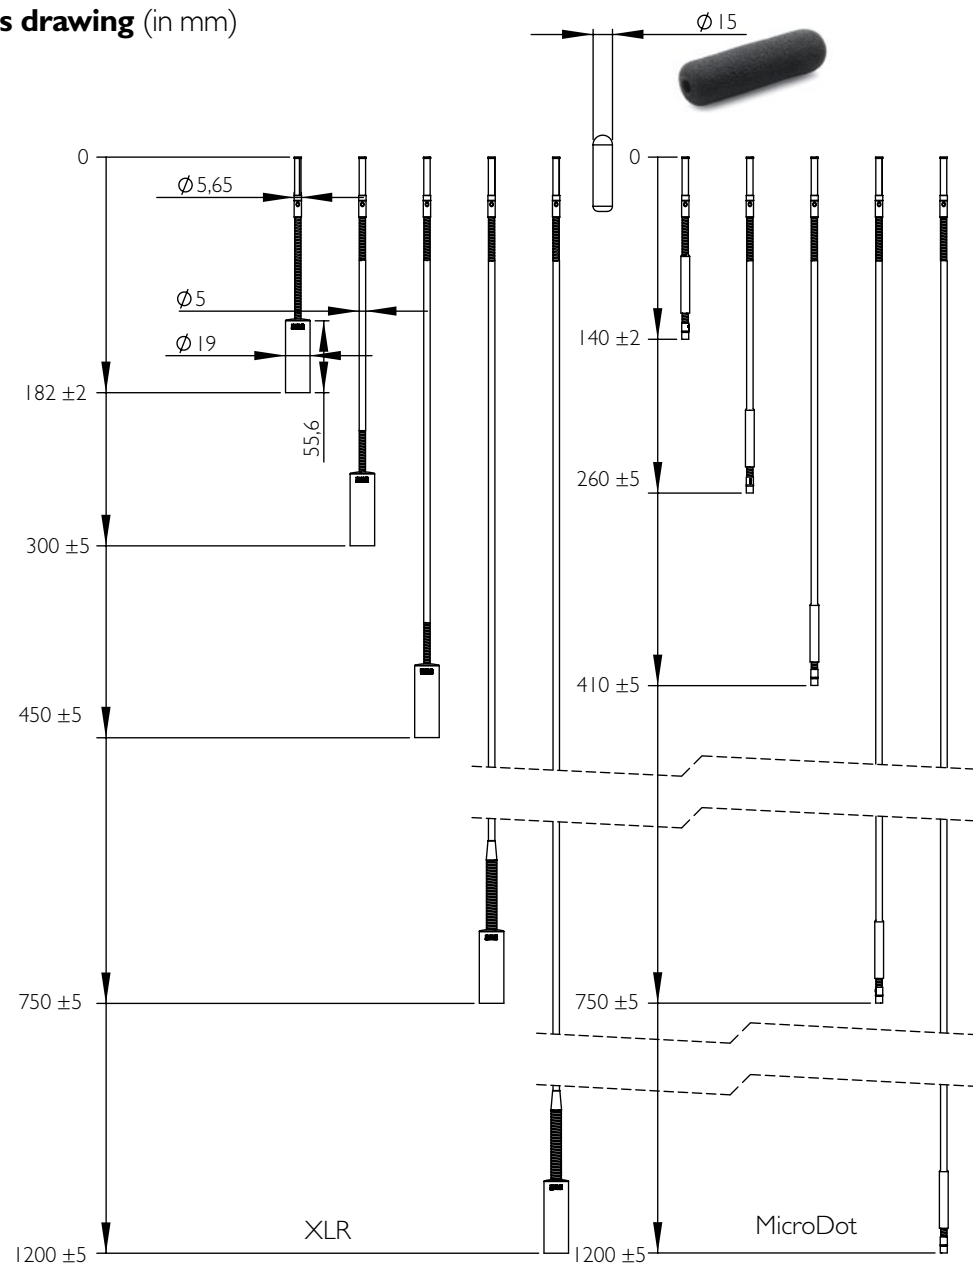

| Connector | Color | Length of a d:screet™ SC4098 Supercardioid Microphone |               |               |               |                |  |
|-----------|-------|---|---------------|---------------|---------------|----------------|--|
|           |       | 16 cm (6 in)  | 28 cm (11 in) | 43 cm (17 in) | 77 cm (30 in) | 122 cm (48 in) |  |
| MicroDot  | Black | ✓   | ✓             | ✓             | ✓             | ✓              |  |
| MicroDot  | White | ✓   | ✓             | ✓             |               |                |  |
|           |       |   |               |               |               |                |  |
|           |       | 20 cm (8 in)  | 32 cm (13 in) | 47 cm (18 in) | 77 cm (30 in) | 122 cm (48 in) |  |
| XLR-3M    | Black | ✓   | ✓             | ✓             | ✓             | ✓              |  |
| XLR-3M    | White | ✓   | ✓             | ✓             |               |                |  |

Accessories included

DUA0580B Foam Windscreen, black or DUA0580W Foam Windscreen, white

Optional accessories

For podium/table/hanging/floor stand applications

- DUA0580B Foam Windscreen, black
- DUA0580W Foam Windscreen, white
- Adapters for wireless applications (for MicroDot variants only)
- DAD600I-BC MicroDot to 3 pin XLR adapter (for MicroDot variants only)
- CM2250B00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 5 m (16.4 ft), black
- CM22100B00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 10 m (32.8 ft), black
- CM22200B00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 20 m (65.6 ft), black
- CM2218W00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 1.8 m (5.9 ft), white
- CM2250W00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 5 m (16.4 ft), white
- CM22100W00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 10 m (32.8 ft), white
- CM22200W00 MicroDot Extension Cable, 2.2 mm (0.09 in) diameter, 120 m (65.6 ft), white


For podium/table/floor stand applications only

- TSM400I Table Shock Mount \*See drawing on page 6
- KM29375 K&M Table Base with switch
- KM29376 K&M Table Base
- CMX2218B00 Miniature MicroDot Cable for Table Shock Mount (TSM400I)
- SC4098-BX-FGS Floor Stand with 120 cm (47 in) Boom
- SC4098-BX-FJS Floor Stand with 75 cm (30 in) Boom



## TSM400I Table Shock Mount

### Dimension drawings (in mm)

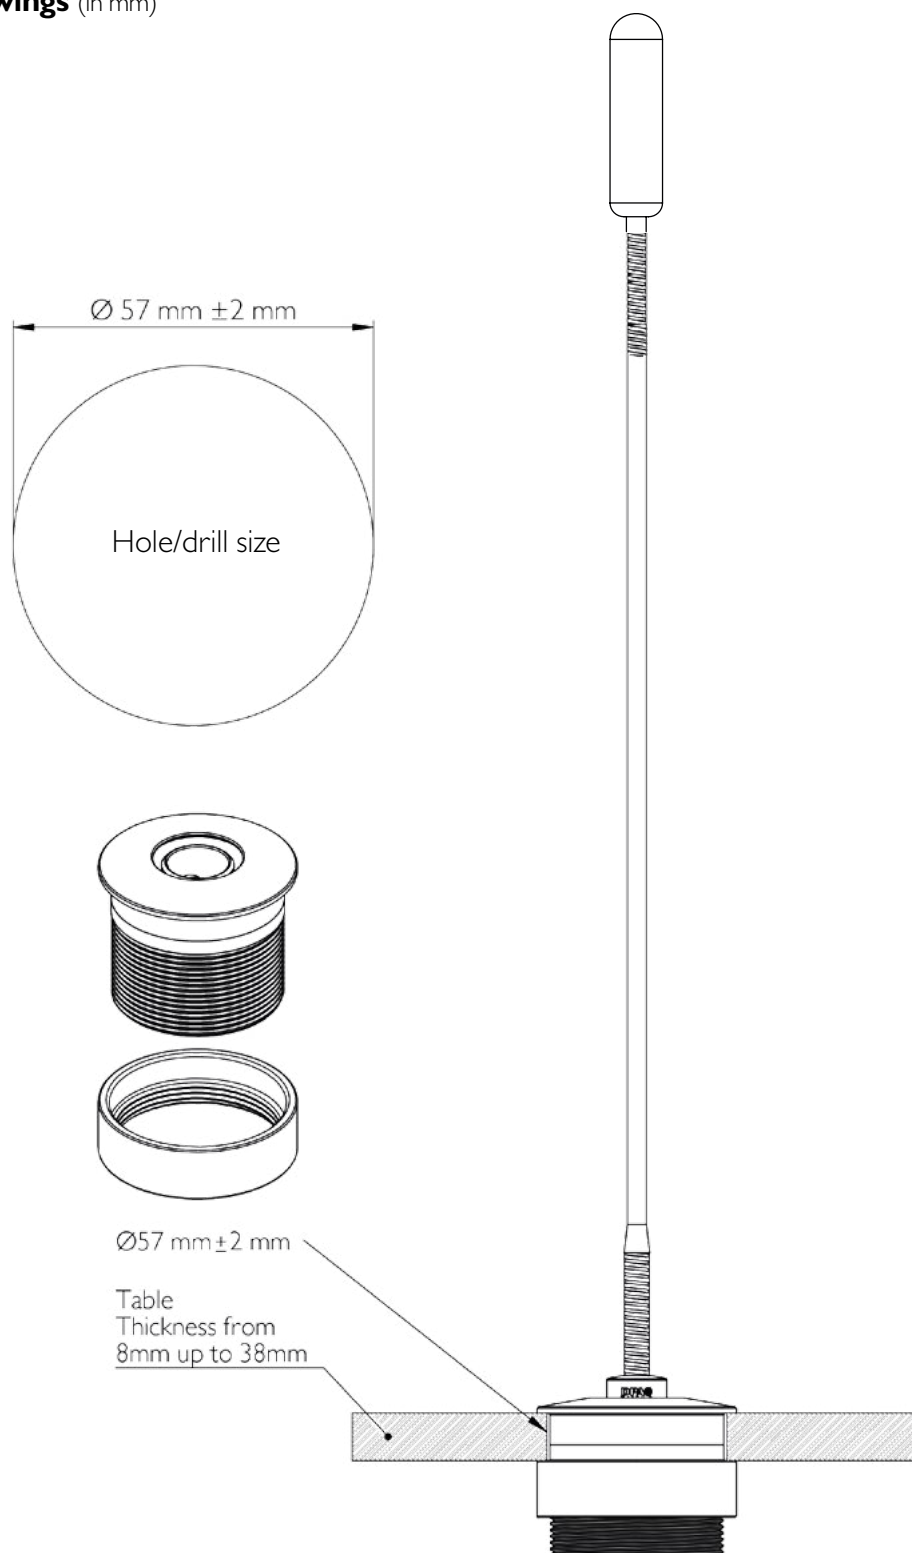

The Table Shock Mount is a fixed microphone mount that offers the best shock rejection available of any integrated podium/table mount. It is optimized for the weight and dimensions of our d:screet™ and d:dicat™ Microphones and mic boom poles.

Vertical softness absorbs handling vibration. Horizontal movements are controlled to prevent the podium boom from touching the mount.

The Table Shock Mount is designed to match the sleek Scandinavian look of our d:screet™ and d:dicat™ Microphones.